

150V N-Ch Power MOSFET
Feature


- ◇ High Speed Power Smooth Switching, Logic Level
- ◇ Enhanced Body diode dv/dt capability
- ◇ Enhanced Avalanche Ruggedness
- ◇ 100% UIS Tested, 100% Rg Tested
- ◇ Lead Free

V_{DS}	150	V
$R_{DS(on),typ}$	8.7	$m\Omega$
$R_{DS(on),typ}$	9	$m\Omega$
I_D (Silicon Limited)	122	A
I_D (Package Limited)	120	A

Application

- ◇ Synchronous Rectification in SMPS
- ◇ Hard Switching and High Speed Circuit
- ◇ Power Tools
- ◇ UPS
- ◇ Motor Control

TO-263

TO-220


Part Number	Package	Marking
HGB105N15SL	TO-263	B105N15SL
HGP105N15SL	TO-220	P105N15SL

Absolute Maximum Ratings at $T_j=25^\circ C$ (unless otherwise specified)

Parameter	Symbol	Conditions	Value	Unit
Continuous Drain Current (Silicon Limited)	I_D	$T_C=25^\circ C$	122	A
Continuous Drain Current (Package Limited)		$T_C=100^\circ C$	86	
		$T_C=25^\circ C$	120	
Drain to Source Voltage	V_{DS}	-	150	V
Gate to Source Voltage	V_{GS}	-	± 20	V
Pulsed Drain Current	I_{DM}	-	400	A
Avalanche Energy, Single Pulse	E_{AS}	$L=0.4mH, T_C=25^\circ C$	500	mJ
Power Dissipation	P_D	$T_C=25^\circ C$	333	W
Operating and Storage Temperature	T_J, T_{stg}	-	-55 to 175	°C

Absolute Maximum Ratings

Parameter	Symbol	Max	Unit
Thermal Resistance Junction-Case	R_{eJC}	0.45	°C/W
Thermal Resistance Junction-Ambient	R_{eJA}	60	°C/W

Electrical Characteristics at $T_j=25^\circ\text{C}$ (unless otherwise specified)
Static Characteristics

Parameter	Symbol	Conditions	Value			Unit
			min	typ	max	
Drain to Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}}=0\text{V}, I_D=250\mu\text{A}$	150	-	-	V
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}}=V_{\text{DS}}, I_D=250\mu\text{A}$	1	1.9	3	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=150\text{V}, T_j=25^\circ\text{C}$	-	-	1	μA
		$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=150\text{V}, T_j=100^\circ\text{C}$	-	-	100	
Gate to Source Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Drain to Source on Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}}=10\text{V}, I_D=20\text{A}$	TO-263	-	8.7	10.2
		$V_{\text{GS}}=10\text{V}, I_D=4.5\text{A}$	TO-263	-	9.5	12.3
		$V_{\text{GS}}=10\text{V}, I_D=20\text{A}$	TO-220	-	9	10.5
		$V_{\text{GS}}=10\text{V}, I_D=4.5\text{A}$	TO-220	-	9.8	12.5
Transconductance	g_{fs}	$V_{\text{DS}}=5\text{V}, I_D=20\text{A}$	-	80	-	S
Gate Resistance	R_G	$V_{\text{GS}}=0\text{V}, V_{\text{DS}} \text{ Open}, f=1\text{MHz}$	-	0.7	-	Ω

Dynamic Characteristics

Input Capacitance	C_{iss}	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=75\text{V}, f=1\text{MHz}$	-	4059	-	pF
Output Capacitance	C_{oss}		-	302	-	
Reverse Transfer Capacitance	C_{rss}		-	11	-	
Total Gate Charge	$Q_g(10\text{V})$	$V_{\text{DD}}=75\text{V}, I_D=20\text{A}, V_{\text{GS}}=10\text{V}$	-	57	-	nC
Total Gate Charge	$Q_g(4.5\text{V})$		-	26	-	
Gate to Source Charge	Q_{gs}		-	12	-	
Gate to Drain (Miller) Charge	Q_{gd}		-	10	-	
Turn on Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}}=75\text{V}, I_D=20\text{A}, V_{\text{GS}}=10\text{V}, R_G=10\Omega,$	-	20	-	ns
Rise time	t_r		-	10	-	
Turn off Delay Time	$t_{\text{d}(\text{off})}$		-	32	-	
Fall Time	t_f		-	12	-	

Reverse Diode Characteristics

Diode Forward Voltage	V_{SD}	$V_{\text{GS}}=0\text{V}, I_F=20\text{A}$	-	0.9	1.2	V
Reverse Recovery Time	t_{rr}	$V_R=75\text{V}, I_F=20\text{A}, dI_F/dt=100\text{A}/\mu\text{s}$	-	95	-	ns
Reverse Recovery Charge	Q_{rr}		-	285	-	nC

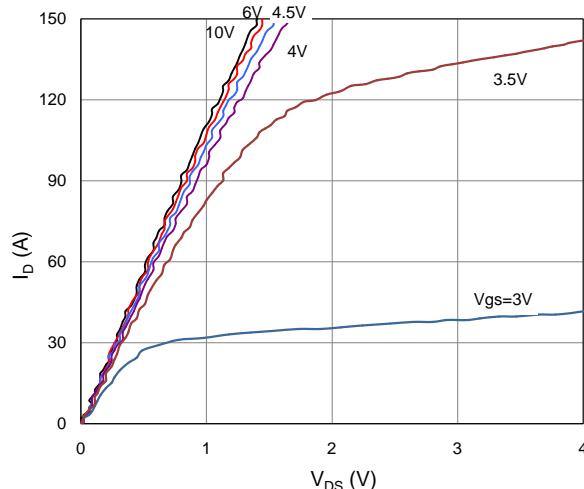
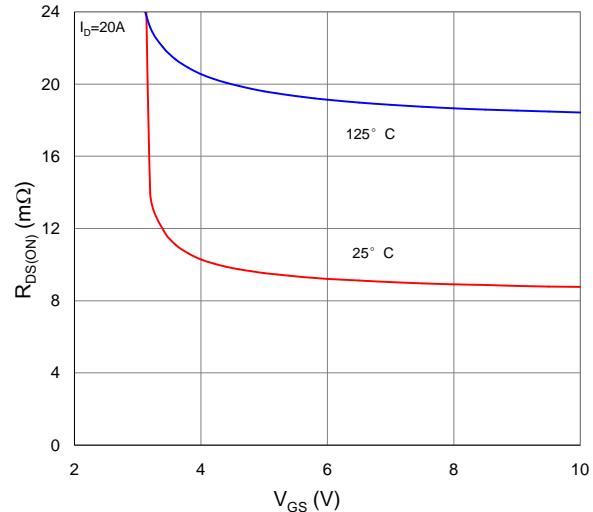
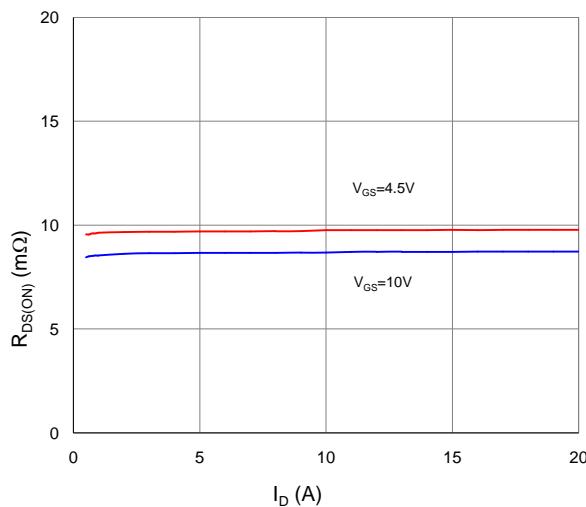
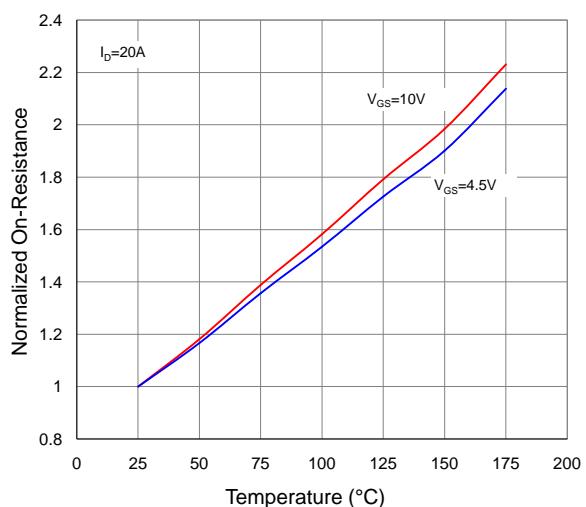
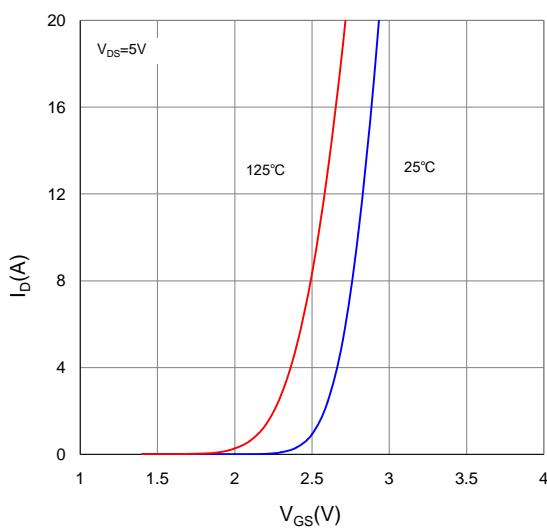
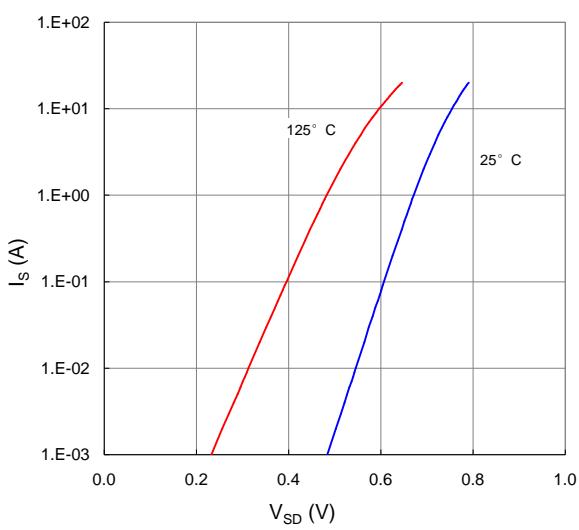
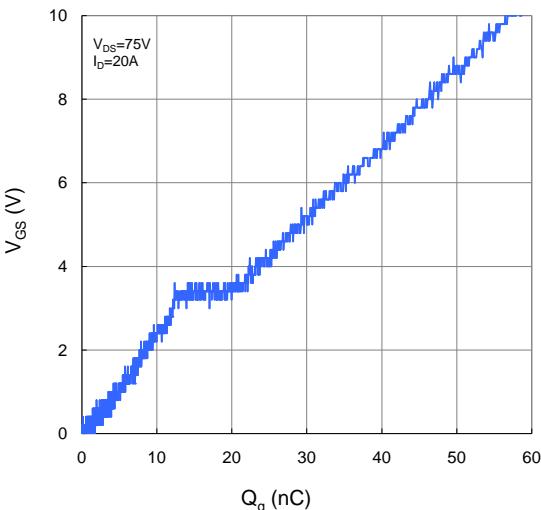
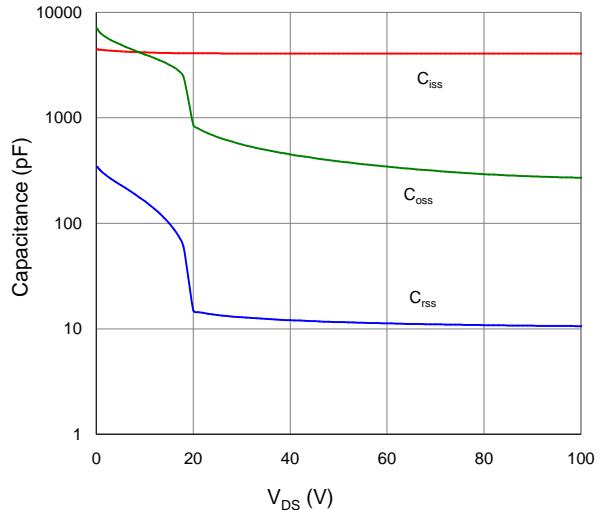
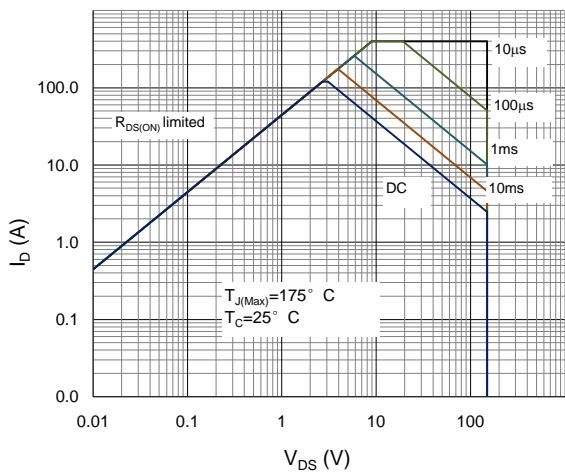
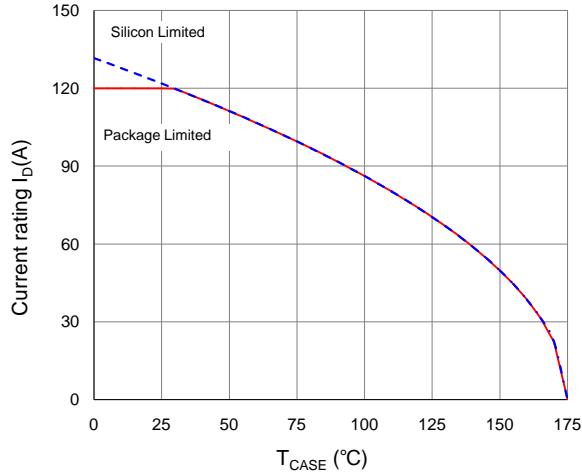
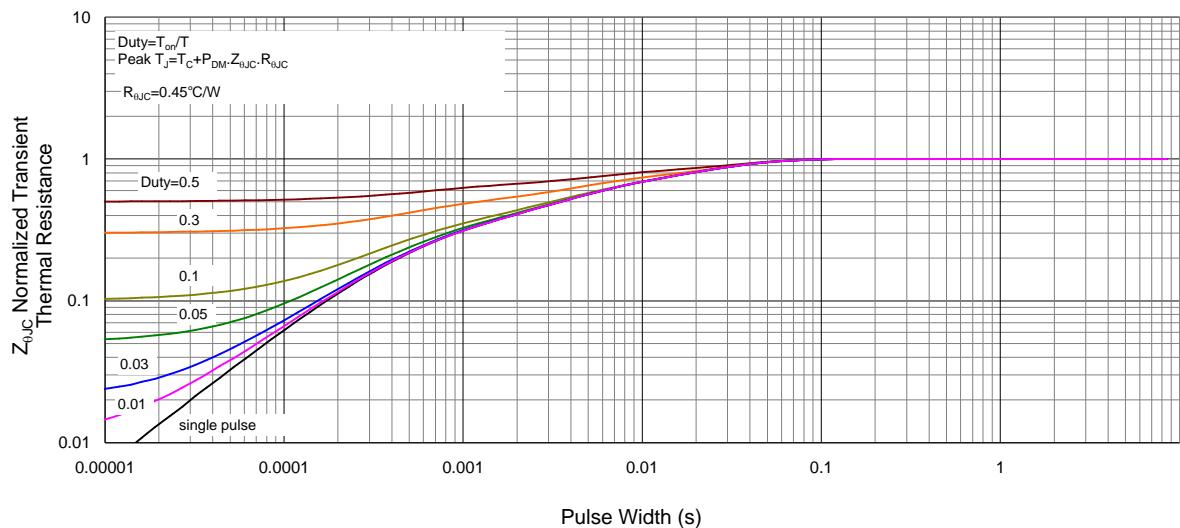
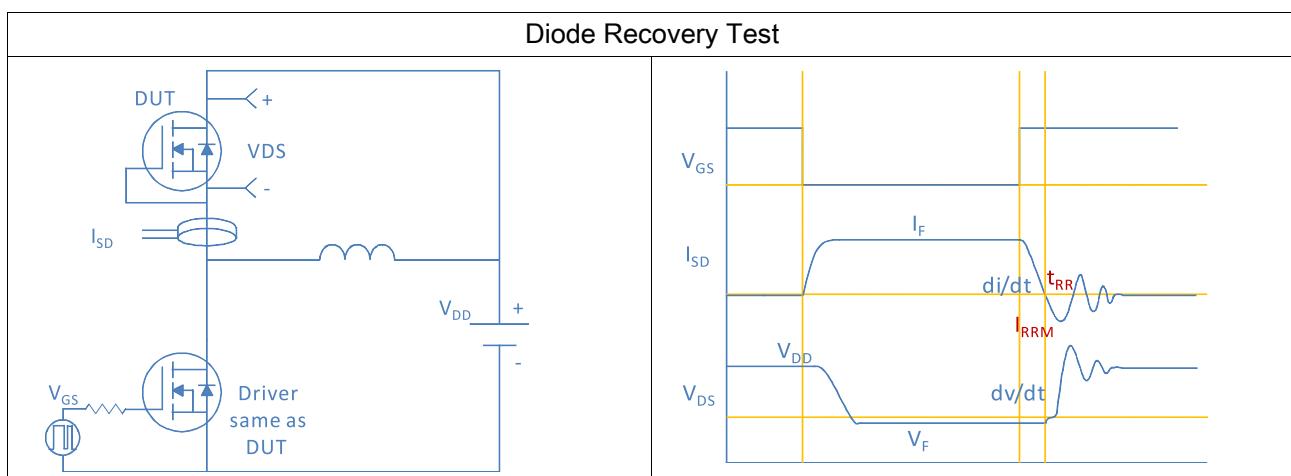
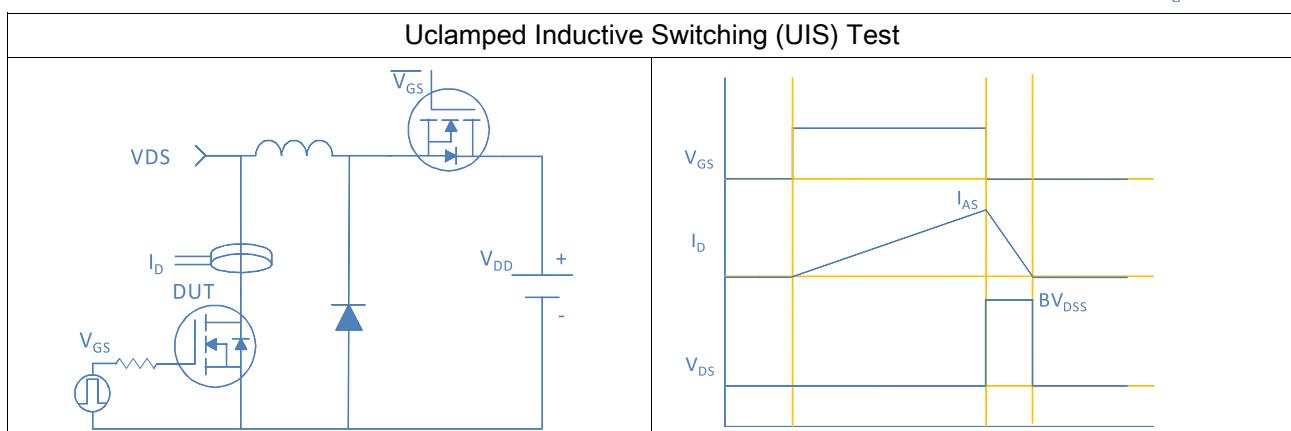
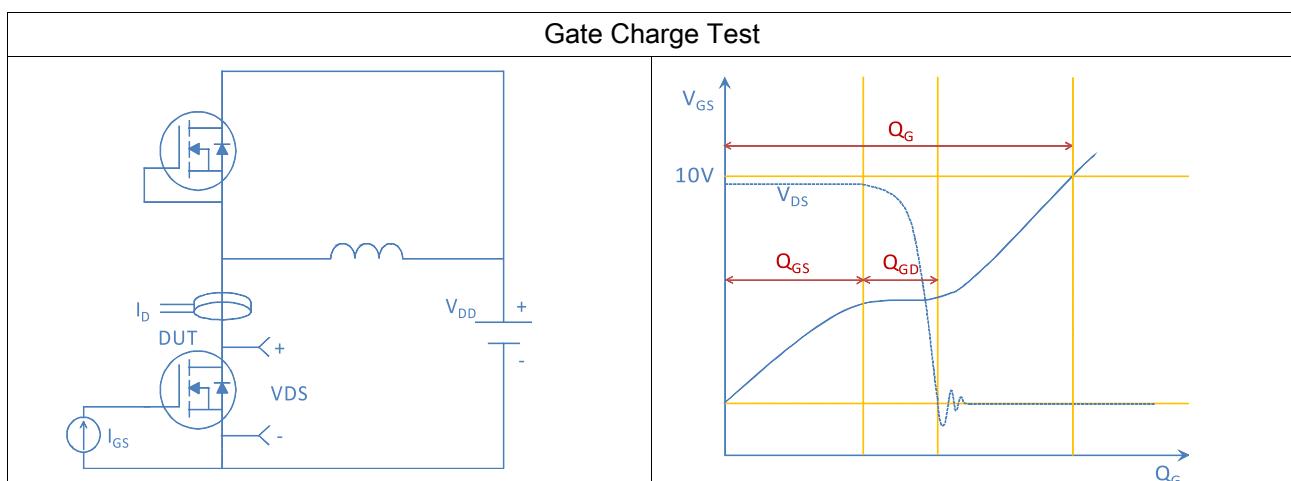
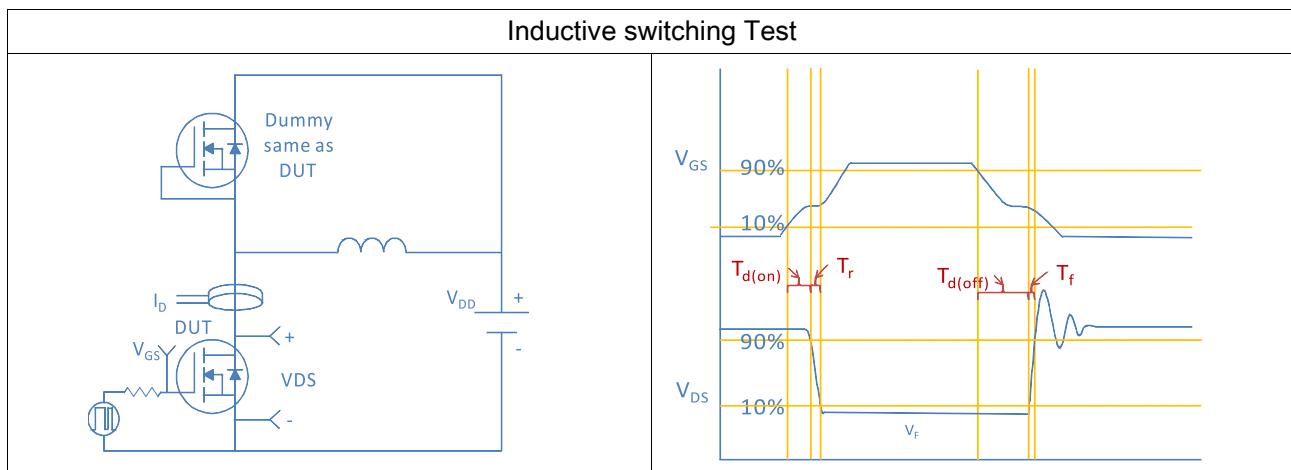
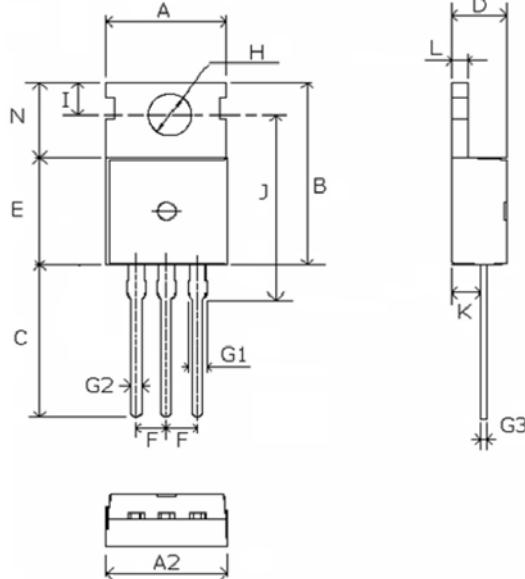
Fig 1. Typical Output Characteristics

Figure 2. On-Resistance vs. Gate-Source Voltage

Figure 3. On-Resistance vs. Drain Current and Gate Voltage

Figure 4. Normalized On-Resistance vs. Junction Temperature

Figure 5. Typical Transfer Characteristics

Figure 6. Typical Source-Drain Diode Forward Voltage


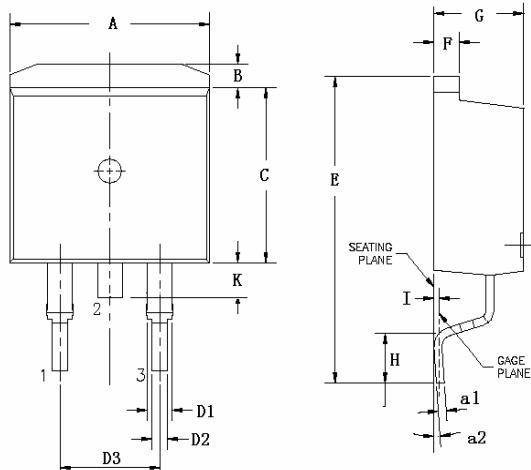
Figure 7. Typical Gate-Charge vs. Gate-to-Source Voltage

Figure 8. Typical Capacitance vs. Drain-to-Source Voltage

Figure 9. Maximum Safe Operating Area

Figure 10. Maximum Drain Current vs. Case Temperature

Figure 11. Normalized Maximum Transient Thermal Impedance, Junction-to-Case




TO-220, 3 leads


Dimensions in mm unless otherwise specified

Symbol	Min	Nom	Max
A	9.66	9.97	10.28
A2	9.80	10.00	10.20
B	15.60	15.70	15.80
C	12.70	13.48	14.27
D	4.30	4.50	4.70
E	9.00	9.20	9.40
F		2.54	
G1	1.32	1.52	1.72
G2	0.70	0.82	0.95
G3	0.45	0.52	0.60
H	3.50	3.60	3.70
I	2.70	2.80	2.90
J	15.70	15.97	16.25
K	2.20	2.40	2.60
L	1.15	1.27	1.40
N	6.40	6.60	6.80

TO-263, 2 leads


Dimensions in mm unless otherwise specified

Symbol	Min	Nom	Max
A	9.66	9.97	10.28
B	1.02	1.17	1.32
C	8.59	9.00	9.40
D1	1.14	1.27	1.40
D2	0.70	0.83	0.95
D3		5.08	
E	15.09	15.24	15.39
F	1.15	1.28	1.40
G	4.30	4.50	4.70
H	2.29	2.54	2.79
I		0.25	
K	1.30	1.45	1.60
a1	0.45	0.55	0.65
a2(degree)	0°		8°