



Silicon N-Channel Power MOSFET




®

HGP017N03A-G

General Description:

HGP017N03A-G, the silicon N-channel Enhanced VDMOSFETs, is obtained by the high density Trench technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. This device is suitable for use as A load switch and PWM applications. the package form is TO-220, which accords with the RoHS standard.

V_{DSS}	30	V
I_D (Silicon limited)	260	A
I_D (Package limited)	120	A
P_D	162.3	W
$R_{DS(ON)Typ}$	1.3	$m\Omega$




Features:

- Fast Switching
- Low ON Resistance
- Low Gate Charge
- Low Reverse transfer capacitances
- 100% Single Pulse avalanche energy Test
- Halogen Free

Applications:

Power switch circuit of adaptor and charger.



Absolute ($T_j = 25^\circ C$ unless otherwise specified) :

Symbol	Parameter	Rating	Units
V_{DSS}	Drain-to-Source Voltage	30	V
I_D	Continuous Drain Current $T_C = 25^\circ C$ (Silicon limited)	260	A
	Continuous Drain Current $T_C = 25^\circ C$ (Package limited)	120	A
	Continuous Drain Current $T_C = 100^\circ C$	120	A
I_{DM}^{a1}	Pulsed Drain Current $T_C = 25^\circ C$	480	A
V_{GS}	Gate-to-Source Voltage	± 18	V
E_{AS}^{a2}	Avalanche Energy	625	mJ
P_D	Power Dissipation $T_C = 25^\circ C$	162.3	W
	Derating Factor above $25^\circ C$	1.29	$W/^\circ C$
T_j, T_{stg}	Operating Junction and Storage Temperature Range	150, -55 to 150	$^\circ C$
TL	Maximum Temperature for Soldering	300	$^\circ C$



HGP017N03A-G



Electrical Characteristics ($T_j = 25^\circ\text{C}$ unless otherwise specified) :

OFF Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
V_{DSS}	Drain to Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu\text{A}$	30	--	--	V
I_{DSS}	Drain to Source Leakage Current	$V_{DS}=30V, V_{GS}=0V, T_j = 25^\circ\text{C}$	--	--	1	μA
		$V_{DS}=24V, V_{GS}=0V, T_j = 125^\circ\text{C}$	--	--	100	
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS}=18V$	--	--	100	nA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS}=-18V$	--	--	-100	nA

ON Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$R_{DS(ON)}$	Drain-to-Source On-Resistance	$V_{GS}=10V, I_D=19A$	--	1.3	1.7	$\text{m}\Omega$
		$V_{GS}=4.5V, I_D=19A$	--	1.8	2.3	$\text{m}\Omega$
$V_{GS(\text{TH})}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	0.9	1.35	1.8	V

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
R_g	Gate resistance	$V_{GS}=0V, V_{DS}=0V, f=1\text{MHz}$	--	1.29	--	Ω
C_{iss}	Input Capacitance		--	4849	--	pF
C_{oss}	Output Capacitance	$V_{GS} = 0V$ $V_{DS} = 15V$ $f = 1.0\text{MHz}$	--	3665	--	
C_{rss}	Reverse Transfer Capacitance		--	565	--	

Resistive Switching Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$t_{d(\text{ON})}$	Turn-on Delay Time		--	20	--	ns
t_r	Rise Time	$V_{GS}=10V$ $R_g=6\Omega$	--	20.4	--	
$t_{d(\text{OFF})}$	Turn-Off Delay Time	$V_{DD}=15V$ $I_d=50A$	--	72.8	--	
t_f	Fall Time		--	23.6	--	
Q_g	Total Gate Charge		--	92.5	--	nC
Q_{gs}	Gate to Source Charge	$V_{GS} = 10V$ $V_{DD}=15V$ $I_d=19A$	--	10.7	--	
Q_{gd}	Gate to Drain ("Miller")Charge		--	24.6	--	

**Source-Drain Diode Characteristics**






Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
I _S	Continuous Source Current (Body Diode)	T _C = 25 °C	--	--	120	A
I _{SM}	Maximum Pulsed Current (Body Diode)		--	--	480	A
V _{SD}	Diode Forward Voltage	I _S =19A, V _{GS} =0V	--	--	1.2	V
t _{rr}	Reverse Recovery Time	I _S =19A di/dt=100A/us, V _{GS} =0V	--	83.2	--	ns
Q _{rr}	Reverse Recovery Charge		--	116.5	--	nC
Pulse width t _p ≤300μs, δ≤2%						

Symbol	Parameter	Max.	Units
R _{θ JC}	Junction-to-Case	0.77	°C/W
R _{θ JA}	Junction-to-Ambient	62.5	°C/W

Notes:

a1: Repetitive rating; pulse width limited by maximum junction temperature

a2: L=0.5mH,I_{as}=50A Start TJ=25°C

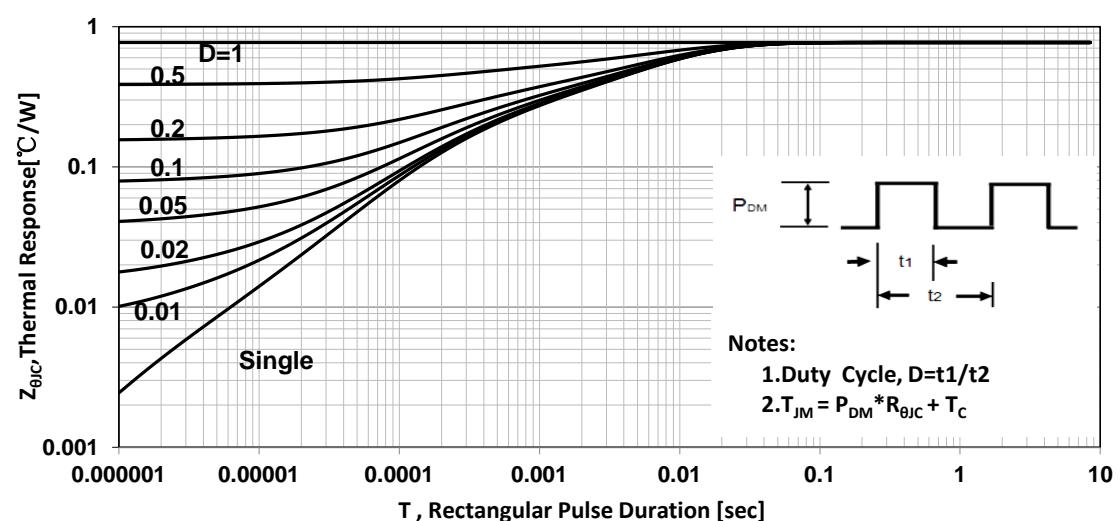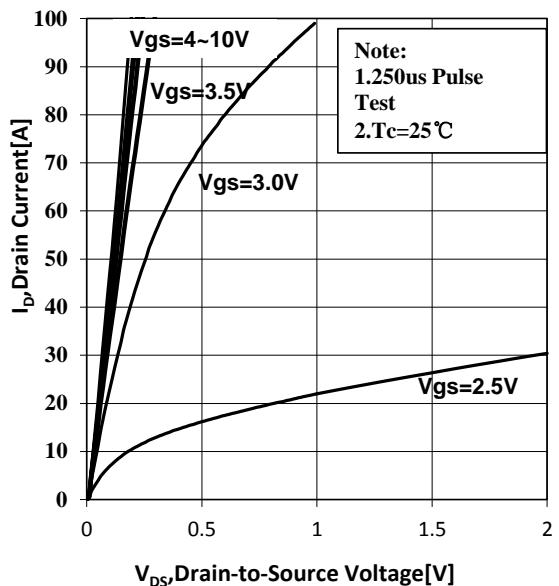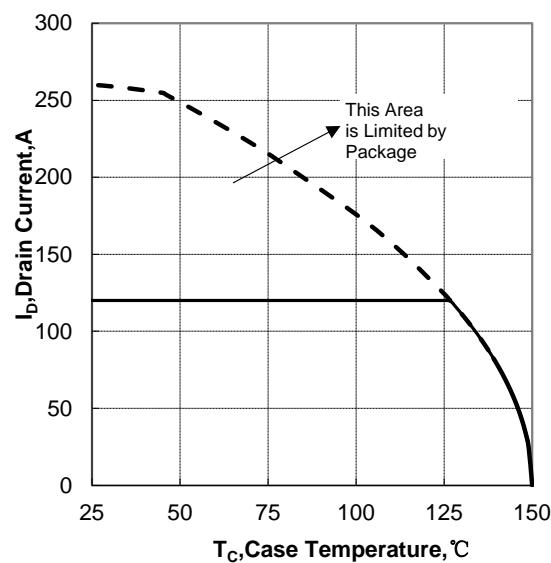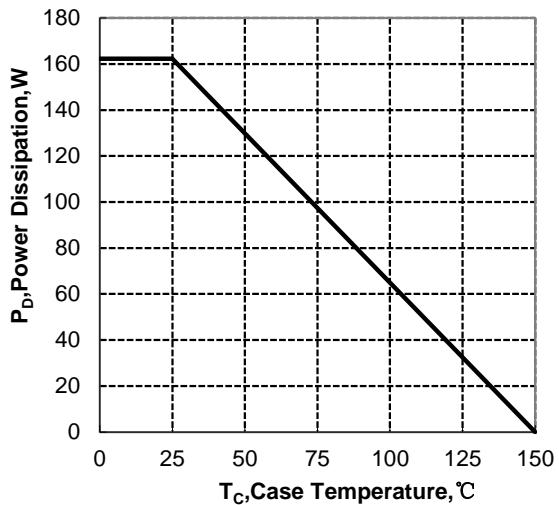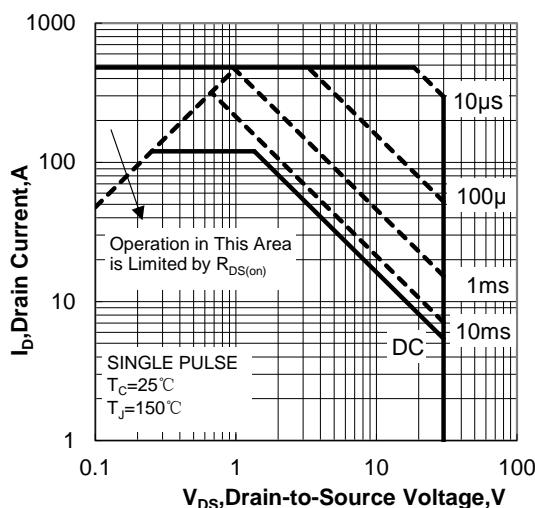Characteristics Curve:


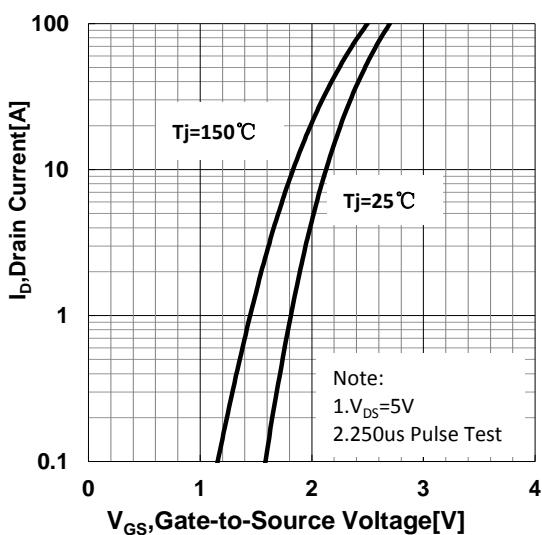


Figure 6 Typical Transfer Characteristics

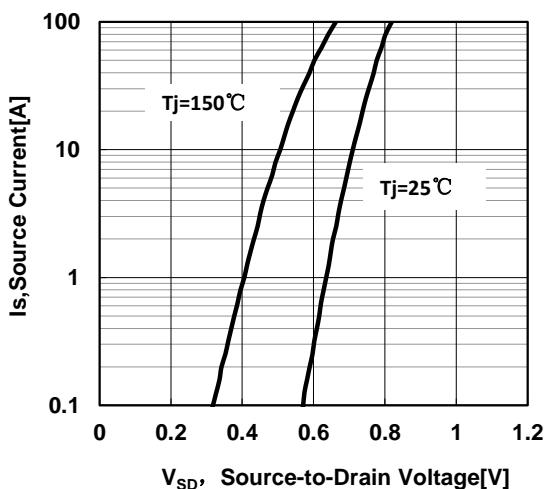


Figure 7 Typical Body Diode Transfer Characteristics

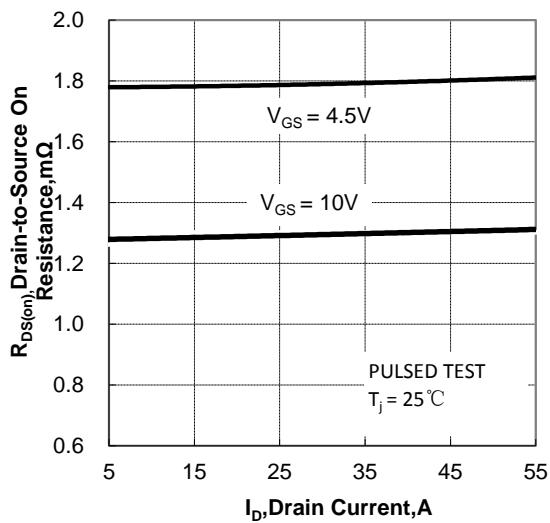


Figure 8. Drain-to-Source On Resistance vs Drain Current

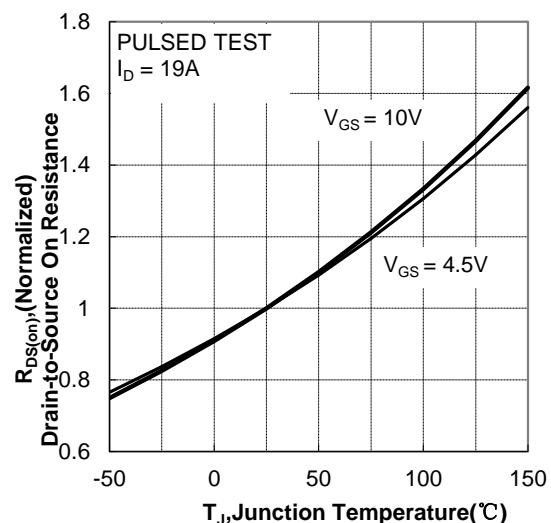


Figure 9. Normalized On Resistance vs Junction Temperature

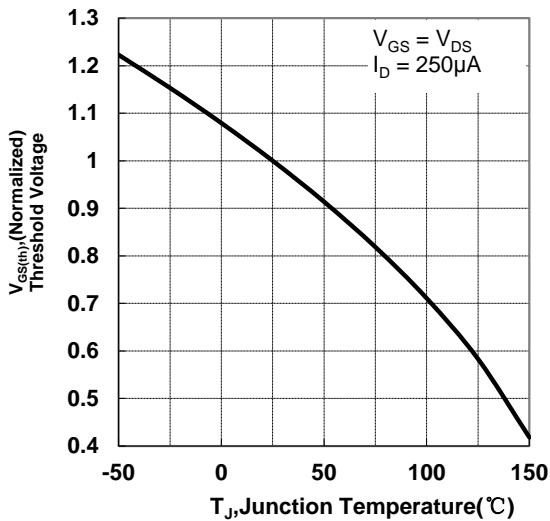


Figure 10. Normalized Threshold Voltage vs Junction Temperature

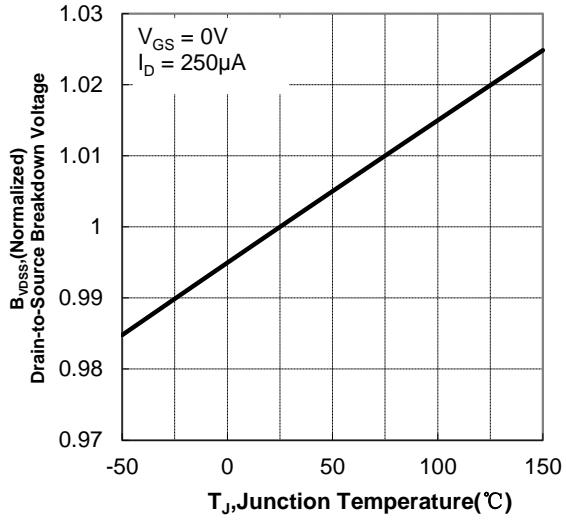


Figure 11. Normalized Breakdown Voltage vs Junction Temperature

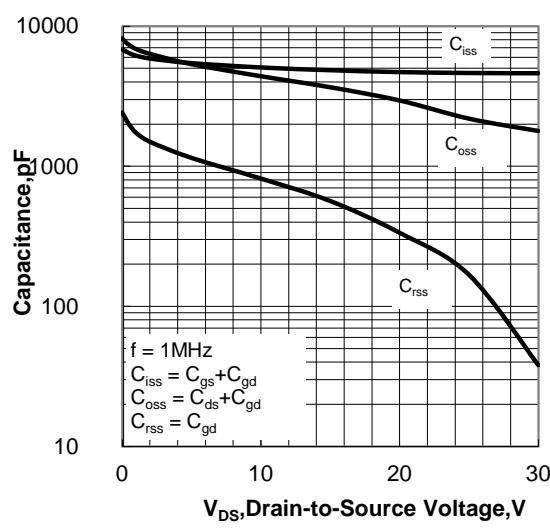


Figure 12. Capacitance Characteristics

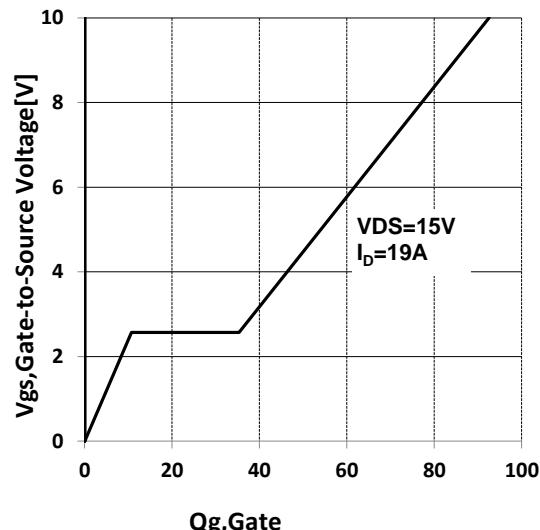


Figure 13 Typical Gate Charge vs Gate to Source Voltage

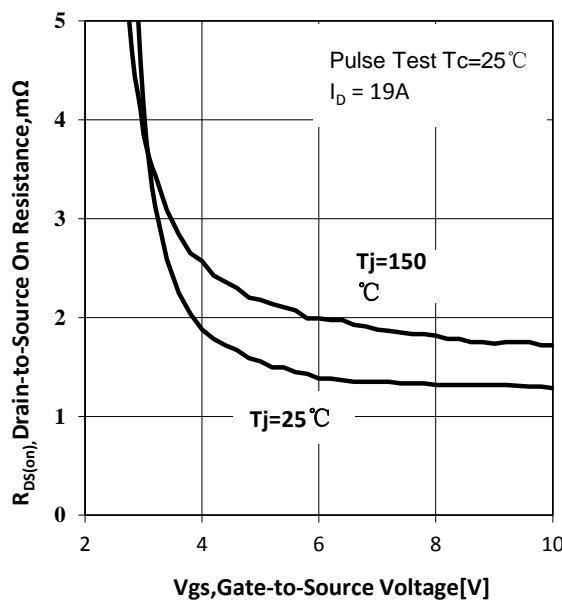


Figure 14. Drain-to-Source On Resistance vs Gate to Source Voltage

Test Circuit and Waveform

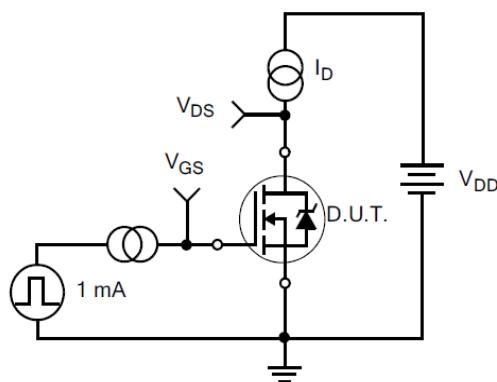


Figure 15. Gate Charge Test Circuit
Waveforms

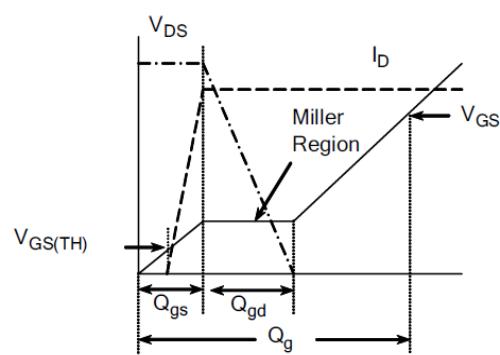


Figure 16. Gate Charge

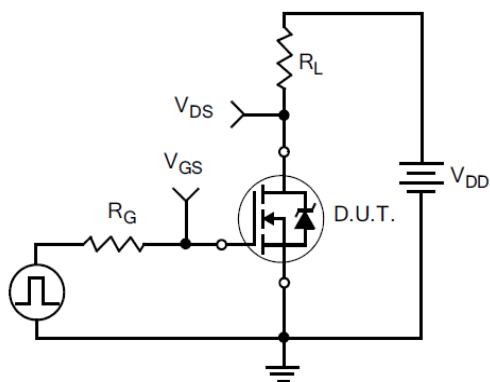


Figure 17. Resistive Switching Test Circuit
Waveforms

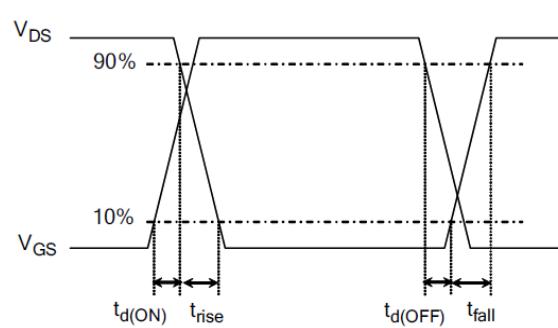


Figure 18. Resistive Switching

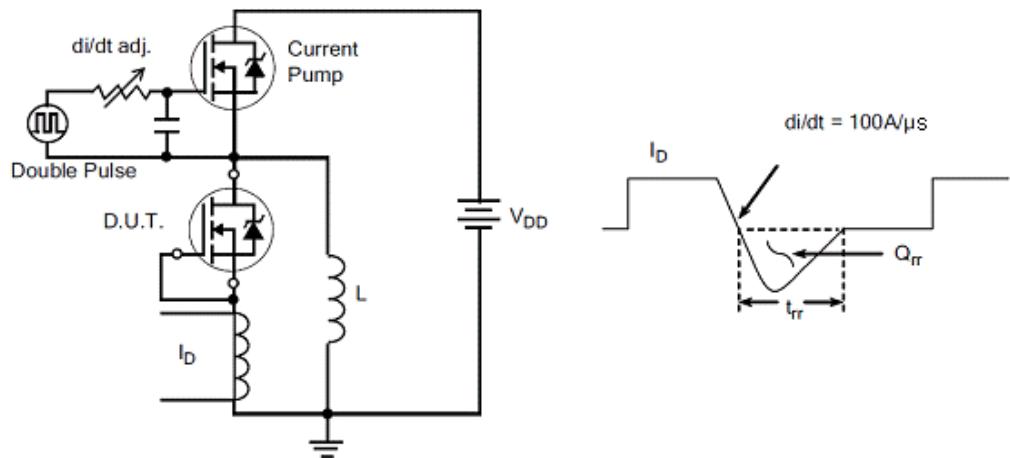


Figure 19. Diode Reverse Recovery Test Circuit

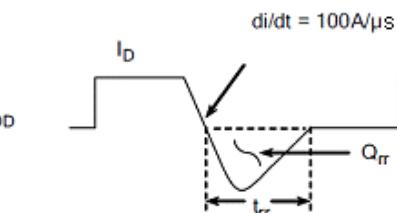


Figure 20. Diode Reverse Recovery

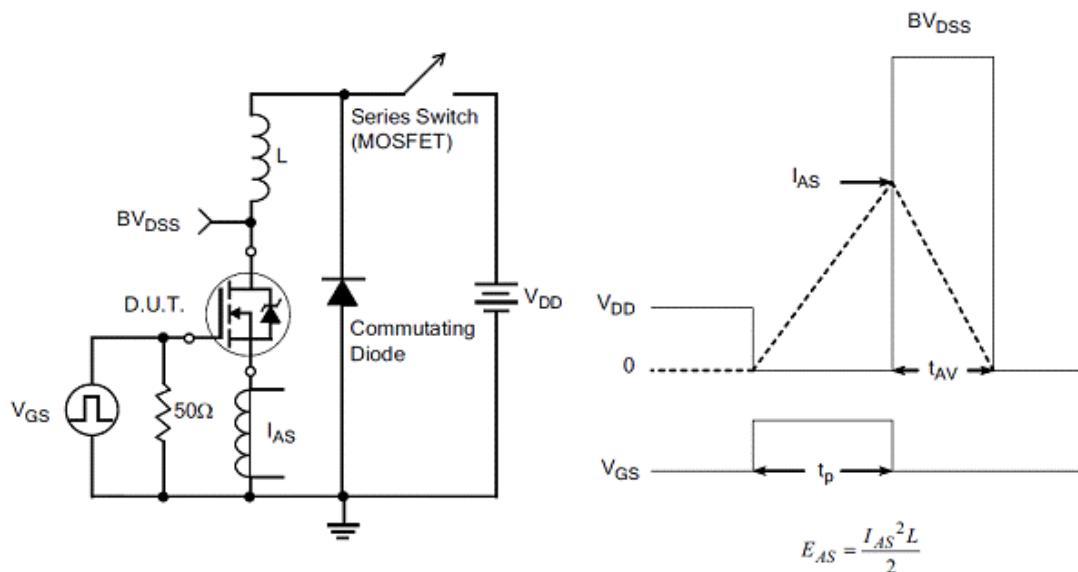
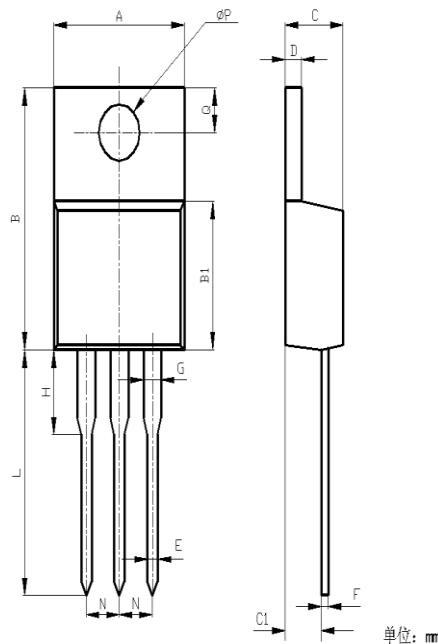


Figure 21. Unclamped Inductive Switching Test Circuit Waveform

Figure 22. Unclamped Inductive Switching

$$E_{AS} = \frac{I_{AS}^2 L}{2}$$

**Package Information:**

Symbol	Values(mm)	
	MIN	MAX
A	9.6	10.6
B	15	16
B1	8.9	9.5
C	4.3	4.8
C1	2.3	3.1
D	1.2	1.4
E	0.7	0.9
F	0.3	0.6
G	1.17	1.37
H	2.7	3.8
L*	12.6	14.8
N	2.34	2.74
Q	2.4	3
P	3.5	3.9

TO-220 Package



The name and content of poisonous and harmful material in products

Part's Name	Hazardous Substance ^②									
	Pb ^③	Hg ^③	Cd ^③	Cr (VI) ^④	PBB ^⑤	PBDE ^⑥	DIBP ^⑦	DEHP ^⑧	DBP ^⑨	BBP ^⑩
Limit ^⑪	≤ ^⑫ 0.1% ^⑬	≤ ^⑫ 0.1% ^⑬	≤ ^⑫ 0.01% ^⑬	≤0.1% ^⑭	≤0.1% ^⑭	≤0.1% ^⑭	≤0.1% ^⑭	≤0.1% ^⑭	≤0.1% ^⑭	≤0.1% ^⑭
Lead Frame ^⑮	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯
Molding	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯
Chip ^⑰	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯
Wire Bonding ^⑱	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯
Solder ^⑲	X ^⑳	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯	O ^⑯
Note ^⑳	◊ : Means the hazardous material is under the criterion of 2011/65/EU. ^⑳ × : Means the hazardous material exceeds the criterion of 2011/65/EU. ^⑳ The plumbum element of solder exist in products presently, but within the allowed range of Eurogroup's RoHS. ^⑳									

Warnings

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. It is suggested to be used under 80 percent of the maximum ratings of the device.
2. When installing the heatsink, please pay attention to the torsional moment and the smoothness of the heatsink.
3. VDMOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. This publication is made by Huajing Microelectronics and subject to regular change without

WUXI CHINA RESOURCES HUAJING MICROELECTRONICS CO., LTD.

**Add: No.14 Liangxi RD. Wuxi, Jiangsu, China Mail:214061 http://www.crhj.com.cn
Tel: +86 0510-85807228 Fax: +86- 0510-85800864**

**Marketing Part: Post: 214061 Tel: +86 0510-81805277/81805336
Fax: +86 0510-85800360/85803016**

Application and Service: Post: 214061 Tel / Fax: +86- 0510-81805243/81805110