

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF HEI AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF HEI AND MUST BE RETURNED TO HEI UPON ITS REQUEST



HM15X11-200-SH

Product Specification

Rev. A

LCD SBU

Hynix Semiconductor Inc.

**Dept. Displays & Systems**

Industriestrasse 16
D-76291 Stutensee / Germany
Tel. +49 7249 910 155 Fax: +49 7249 4232
E-Mail: display@msc-ge.com
Internet: <http://www.msc-ge.com>

SPEC. NUMBER
S864-1051

PRODUCT GROUP
TFT_LCD PRODUCT

REV.
A

ISSUE DATE
Feb. 12. 2001

PAGE
1 OF 24

		PRODUCT GROUP	REV.	ISSUE DATE
		TFT-LCD PRODUCT	A	Feb. 12. 2001
REVISION HISTORY				
REV.	ECN NO.	DESCRIPTION OF CHANGES	DATE	PREPARED
0	E102-F005	Initial Release	Jan.31.2001	YI. KIM
A		Remove switch (6page) - SW1: change into direct connection - SW2: remove	Feb.12.2001	YI. KIM
SPEC. NUMBER		SPEC. TITLE		PAGE
S864 - 1051		HM15X11-200 (Sh) Product Specification		2 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

Contents

No.	Item	Page
1.0	GENERAL DESCRIPTION	4
2.0	ABSOLUTE MAXIMUM RATINGS	5
3.0	ELECTRICAL SPECIFICATIONS	6
4.0	OPTICAL SPECIFICATIONS	8
5.0	INTERFACE CONNECTION	10
6.0	MONITOR MODES	12
7.0	OSD FUNCTION	13
8.0	RELIABILITY TEST	18
9.0	ENVIRONMENT & SAFETY	19
10.0	HANDLING & CAUTIONS	20
11.0	APPENDIX	21

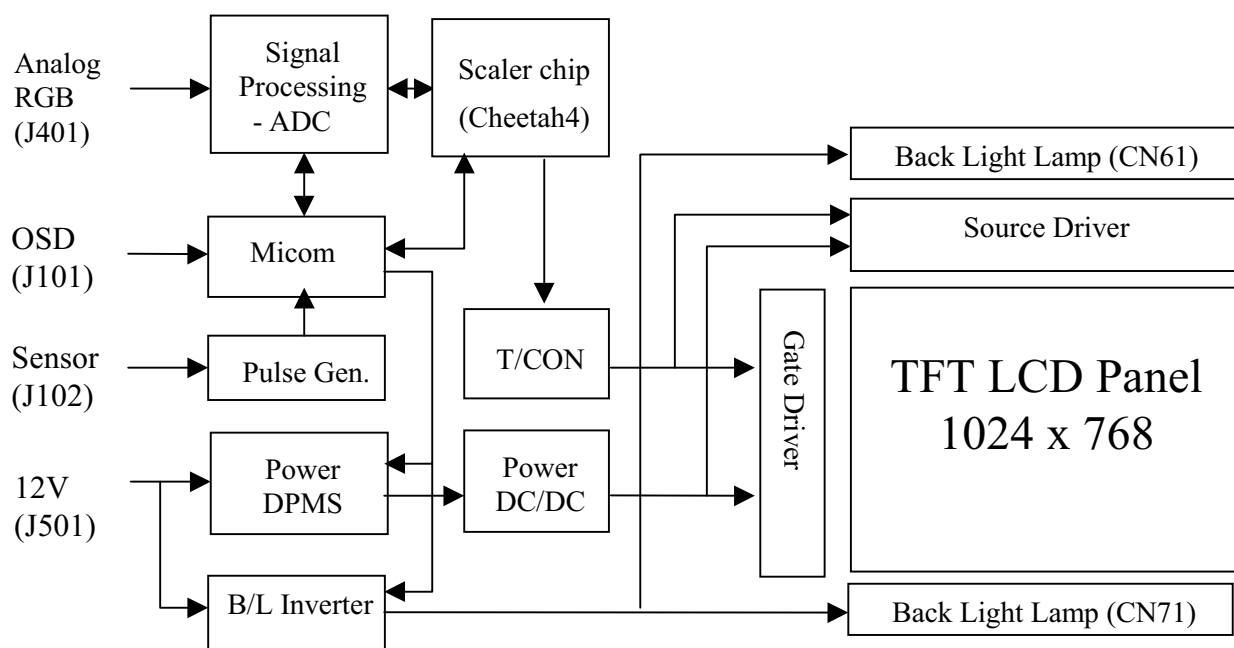
SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	3 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

1.0 GENERAL DESCRIPTION

1.1 Introduction

HM15X11-200 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.0 inch diagonally measured active area with XGA resolutions (1024 x 768) and can display 16,777,216 colors with Dithering. HM15X11-200 accepts has standard analog RGB and Sync signals from any XGA, SVGA, VGA video controller signals and supports from XGA to VGA resolutions at vertical refresh rate to 75Hz.



1.2 Features

- Desk-top type of PC Use
- Display terminals for control system
- Monitors for process controller
- Analog RGB, Separated Sync, Composite Sync, SOG
- Corresponding to DDC1 and DDC2B
- Corresponding to VESA DPMS
- Multi-scan function: XGA, SVGA, VGA
- On Screen Display
- 16,777,216 Colors (using the Dithering)
- High luminance, High Contrast Ratio, High speed Response
- Wide viewing angle
- Incorporated backlight (4 lamps, Inverter Include)
- Language Selection (English, German, Italian, French, Spanish)

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	4 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

1.3 General Specifications

Parameter	Specification	Unit	Remarks
Active area	304.128 (H) x 228.096(V)	mm	
Number of pixels	1024(H) x 768(V)	pixels	
Pixel pitch	0.297(H) x 0.297(V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	16,777,216 (using the Dithering)	colors	
Display mode	Normally white		
Dimensional outline	350.0± 0.5(H) x 266.5± 0.5(V) x 24.5(D) Typ.	mm	
Weight	1650	g	
Back-light	Top/Bottom edge side 4-CCFL type		Note 1

Note:

1. CCFL (Cold Cathode Fluorescent Lamp)

2.0 ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Input Voltage	V _{DD}	-0.3	14.0	V	Ta = 25°C
Backlight Power Supply Voltage	V _{DDB}	-0.3	14.0	V	
Logic Input Voltage	V _{IN1}	-0.3	4.6	V	Ta = 25°C V _{DD} =12V
RGB Input Voltage	V _{IN2}	-6.0	6.0	V	
Operating Temperature (Humidity)	T _{OP}	0	+50	°C	≤ 40 °C
	RH			%	
Storage Temperature (Humidity)	T _{ST}	-20	+60	°C	≤ 40 °C
	RH			%	

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	5 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

3.0 ELECTRICAL SPECIFICATIONS

Measuring condition: $f_v=75\text{Hz}$, $f_{\text{DCLK}}=40\text{MHz}$ @ after RESET

$T_a = 25 \pm 2^\circ\text{C}$

Parameter			Min.	Typ.	Max.	Unit	Remarks
Input Voltage		V _{DD}	10.8	12.0	13.2	V	
Logic Supply	Logic Current	I _{DDL}	-	0.39	-	A	Power On Vertical Color Bar
			-	0.68	-	A	Power On Vertical 2 Skip
			-	0.25	-	A	Power Saving mode
				0.06		A	Power Off
Inverter Supply	Inverter Current	I _{DDB}	-	0.91	-	A	Power On Brightness = Min
			-	1.71	-	A	Power On Brightness = Max
Back-Light Lamp	Voltage	V _{BL}	-	620	-	Vrms	
	Current	I _{BL}	2.5	6.5	-	mArms	per CCFL
	Frequency	F _L	55	60	65	KHz	
	Start Voltage	V _S	-	-	780	Vrms	25°C
			-	-	1160	Vrms	0°C
	Life Time	Hr	25,000	35,000	-	hrs	IBL = 6.5 mA

Note:

1. Definition of lamp lifetime is average life shall be defined as remained rate under 50% of total amount at the life test.

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	6 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

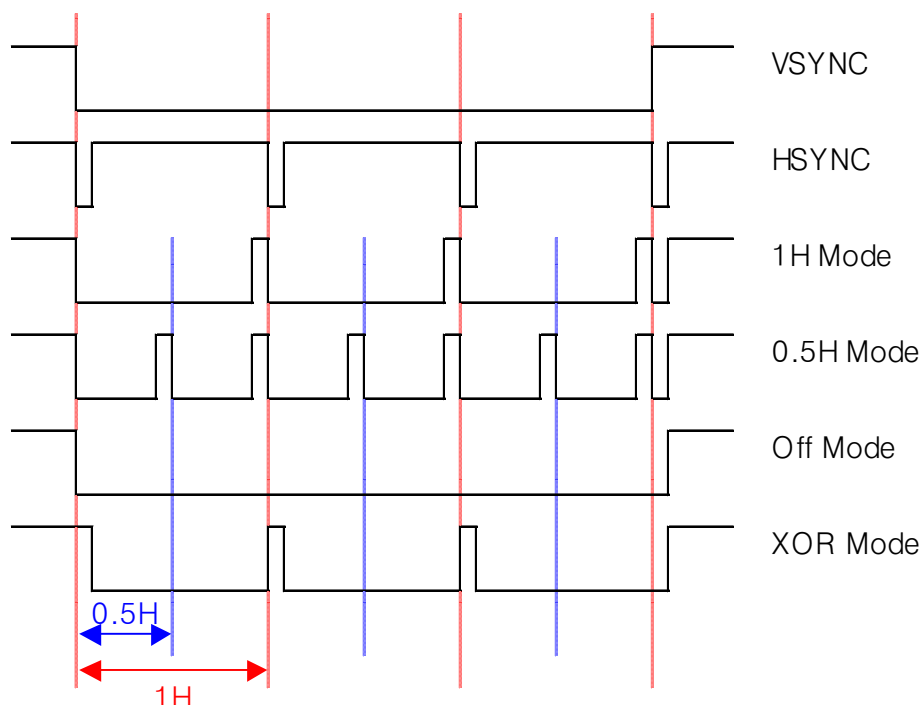
3.2 Video signal (R, G, B) input and Sync Signal Input

Ta = 25± 2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
Maximum Amplitude (white– black)		0 (black)	0.7 (white)	-	Vp-p	Note 1
Sync	Amplitude	0.2	0.3	-	Vp-p	Note 2
	H- Scan Frequency	24.8	-	60	KHz	71.8KHz @SUN
	V-Scan Frequency	56		75	Hz	76.1Hz @SUN
Multi-Sync Process		Separate Signal				Note 3
		Composite-Sync (4 mode)				
		Sync-On-Green (4 mode)				

Note:

- Contrast adjustment is needed if the amplitude exceeds 0.7 Vp-p.
Impedance is 75 Ohm±5%. @Max 50pF
- Polarity is positive and negative at TTL level
Impedance is 470-Ohm min. @Max 1000pF
- Below is kind of composite sync. (4 mode)



SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	7 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

4.0 OPTICAL SPECIFICATIONS

The measurement shall be executed after 30 minutes warm-up period.

Measuring equipment: TOPCON-BM5.

Measuring condition: 1) $f_v=60\text{Hz}$, $f_{\text{DCLK}}=32.5\text{MHz}$ @after RESET

2) Contrast, Brightness = maximum

$T_a = 25 \pm 2^\circ\text{C}$

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	θ_3	$CR > 5$	75	80	-	Deg.	Note 1
		θ_9		75	80	-	Deg.	
	Vertical	θ_{12}		45	50	-	Deg.	
		θ_6		75	80	-	Deg.	
	Horizontal	θ_3	$CR > 10$	50	55	-	Deg.	Note 2
		θ_9		50	55	-	Deg.	
	Vertical	θ_{12}		30	35	-	Deg.	
		θ_6		50	55	-	Deg.	
Luminance Contrast ratio		CR		200	250	-		Note 3
Luminance of White		Y_w		200	220	-	cd/m ²	Note 4
White luminance uniformity		ΔY		-	-	1.45		Note 5
Reproduction Of color	White	x_w	$\theta = 0^\circ$ $\phi = 0^\circ$	0.283	0.313	0.343		Note 6
		y_w		0.300	0.330	0.360		
	Red	x_R		0.602	0.632	0.662		
		y_R		0.301	0.331	0.361		
	Green	x_G		0.257	0.287	0.317		
		y_G		0.578	0.608	0.638		
	Blue	x_B		0.115	0.145	0.175		
		y_B		0.073	0.103	0.133		
Response Time (Rise + Decay)		Ttotal		-	40	50	ms	Note 7
Cross Talk		CT		-	-	2.0	%	Note 8
Luminance Control range		-	Maximum Luminance (100%)	-	50 -100	-	%	-

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	8 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001
Note: - Viewing angle is the angle at which the contrast ratio is greater than 5. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1 shown in Appendix). - Viewing angle is the angle at which the contrast ratio is greater than 10. The other condition is note 1. - Contrast measurements shall be made at viewing angle of $\theta = 0^\circ$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIGURE 1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically. $CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$ - Center Luminance of white is defined as the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display. - The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Maximum Luminance of five points} / \text{Minimum Luminance of five points}$ (see FIGURE 2 shown in Appendix). - The color chromaticity coordinates specified in Table 4. Shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel. - The electro-optical response time measurements shall be made as FIGURE 3 shown in Appendix by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Td, and 90% to 10% is Tr. - Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark. (See FIGURE 4 shown in Appendix).			
SPEC. NUMBER	SPEC. TITLE	PAGE	
S864 - 1051	HM15X11-200 (Sh) Product Specification	9 OF 24	

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

5.0 INTERFACE CONNECTION

5.1 ADC Board Side

(1) J501: S6B-PH-SM3-TB (JST)

Power input connector

Pin No	Symbol	Function
1	NC	No Connection
2	NC	No Connection
3	GND	Ground
4	GND	Ground
5	VDD	+12V Power Supply
6	VDD	+12V Power Supply

(2) J102: S2B-PH-SM3-TB (JST)

Auto brightness sensor input connector

Pin No	Symbol	Function
1	FZ	Fuzzy Input Signal
2	VCC	+5V

(3) J101: S8B-PH-SM3-TB (JST)

OSD input connector

Pin No	Symbol	Function
1	SW1	OSD Up
2	SW2	OSD Down
3	SW3	OSD Right (+)
4	SW4	OSD Left (-)
5	LED1	+5V
6	LED2	LED Control Signal
7	GND	Ground
8	POWER	On / Off

(4) J401: S12B-PH-SM3-TB (JST)

Analog (R, G, B) input connector:

Pin No	Symbol	Function
1	GND	Ground
2	R	Analog Red
3	GND	Ground
4	G	Analog Green
5	GND	Ground
6	B	Analog Blue
7	GND	Ground
8	HSY	Horizontal Sync
9	VSX	Vertical Sync
10	NC	No Connection
11	SDA	DDC Data
12	SCL	DDC Clock

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	10 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

(6) J502: S5B-PH-SM3-TB (JST)

Backlight power connector:

Pin No	Symbol	Function
1	CBKLT	0/3.3V DC (High Active)
2	NC	No Connection
3	CBTNS	0.0~3.0VDC
4	GND	Ground
5	VDDDB	+12V Power Supply

5.2 Inverter Side

(1) J1: 53261-0809 (Molex)

Inverter power input connector

Pin No	Symbol	Function
1	VDDDB	+12V Power Supply
2	VDDDB	+12V Power Supply
3	GND	Ground
4	GND	Ground
5	CBKLT	0/3.3V DC (High Active)
6	GND	Ground
7	CBTNS	0.0~3.5VDC
8	GND	Ground

(2) J2, J3: SM03 (4.0) B-BHS-1-TB (JST)

Back light mating connector

Pin No	Symbol	Function
1	HOT	High Voltage
2	HOT	High Voltage
3	NC	No Connection
4	COLD	Ground

5.3 Lamp Side

(1) CN61, CN71: BHR-04VS-1 (JST)

Back light connector

Pin No	Symbol	Function
1	HOT	High Voltage (Pink)
2	HOT	High Voltage (Pink)
3	NC	No Connection
4	COLD	Ground (White)

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	11 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

6.0 MONITOR MODES

Resolution	Horizontal Freq. (KHz) & Polarity		Vertical Freq. (Hz) & Polarity		Pixel Clock (MHz)	Remark
640 x 480	31.5	+/-	60.0	+/-	25.175	VESA IBM-AT PC-9800
	37.9	+/-	72.0	+/-	31.5	
	37.5	+/-	75.0	+/-	31.5	
800 x 600	35.1	+/-	56.0	+/-	36.0	
	37.9	+/-	60.0	+/-	40.0	
	48.1	+/-	72.0	+/-	50.0	
	46.9	+/-	75.0	+/-	49.5	
1024 x 768	48.4	+/-	60.0	+/-	65.0	
	56.5	+/-	70.0	+/-	75.0	
	60.0	+/-	75.0	+/-	78.75	
720 x 400	31.5	+/-	70.0	+/-	28.3	US Text
640 x 400	24.8	+/-	56.4	+/-	21.053	PC-9800
	31.5	+/-	70.0	+/-	25.175	
600 x 480	35.0	+/-	66.7	+/-	30.2	Power MAC
832 x 624	49.7	+/-	74.6	+/-	57.3	
1024 x 768	60.2	+/-	75.0	+/-	80.0	

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	12 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

7.0 OSD FUNCTION

7.1 Menu Item

Main Menu (Menu Key)		Sub Menu (Select Key)		Value Range (◀▶ key)	Remark
1	ADJUSTMENT	MANUAL	CLOCK	0 to 72	
			PHASE	0 to 31	
			H-POS	0 to 127	
			V-POS	0 to 57	
		AUTO			
2	GAIN CONTROL	MANUAL	BLACK LEVEL	0 to 60	
			CONTRAST	0 to 60	
		DISPLAY COLOR	260K		
			16M		
		AUTO			
3	WHITE BALANCE	COOL			
			◦		
		STD			
			◦		
		WARM			
		USER	R-CONTRAST	0 to 60	
			G-CONTRAST	0 to 60	
			B-CONTRAST	0 to 60	
4	MODE SELECT	OSD H-POSITION			
		OSD V-POSITION			
		400 LINE	640		
			720		

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	13 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

Menu 1

ADJUSTMENT			
[MANUAL]		AUTO]	
CLOCK	3 8	■ ■ ■ ■ ■ ■ ■ ■	- - - - -
PHASE	1 6	■ ■ ■ ■ ■ ■ ■ ■	- - - - -
H - POS	6 5	■ ■ ■ ■ ■ ■ ■ ■	- - - - -
V - POS	3 9	■ ■ ■ ■ ■ ■ ■ ■	- - - - -
1 0 2 4 x 7 6 8			
V : 7 5 H z		H : 6 0 k H z	

Menu 2

GAIN CONTROL			
[MANUAL]		AUTO]	
BLACK LEVEL	3 0	■ ■ ■ ■ ■ ■ ■ ■	- - - - -
CONTRAST	3 0	■ ■ ■ ■ ■ ■ ■ ■	- - - - -
DISPLAY COLORS	2 6 0 K		1 6 M
1 0 2 4 x 7 6 8			
V : 7 5 H z		H : 6 0 k H z	
COLOR			

Menu 3

WHITE BALANCE			
[COOL • STD • WARM]		USER]	
R - CONTRAST	3 0	■ ■ ■ ■ ■ ■ ■ ■	- - - - -
G - CONTRAST	3 0	■ ■ ■ ■ ■ ■ ■ ■	- - - - -
B - CONTRAST	3 0	■ ■ ■ ■ ■ ■ ■ ■	- - - - -
1 0 2 4 x 7 6 8			
V : 7 5 H z		H : 6 0 k H z	

Menu 4

MODE SELECT			
[OSD H - POSITION]		]	
OSD V - POSITION			
4 0 0 LINES	6 4 0	7 2 0	
SCALING	LOW	HIGH	
1 0 2 4 x 7 6 8			
V : 7 5 H z		H : 6 0 k H z	

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	14 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

7.2 Display Item

Item	Functions
ALL RESET	Displayed while all reset is performed
ADJUSTMENT LOCKED	Adjustment is locked
ADJUSTMENT UNLOCKED	Adjustment is unlocked
ADJUSTING	Displayed while adjusting performed
OUT OF ADJUSTING	Displayed when AA (Auto Adjustment) or AGC (Auto Gain Control) can not adjust
OUT OF TIMING	Displayed when H-Sync. Or V-Sync are out of range
NO SIGNAL	Displayed when there is no signal

7.3 Key Operation

Function	MENU	SELECT	◀	▶	BRIGHT	POWER ON
ALL RESET	MENU	SELECT				ON
ADJUSTMENT LOCKED	MENU					ON
ADJUSTMENT UNLOCKED	MENU					ON
SELF TEST	MENU	SELECT	◀			ON
VERSION		SELECT	◀	▶		ON
LANGUAGE		SELECT		▶		ON
EEPROM CLEAR	MENU	SELECT		▶		ON
FACTORY MODE ON BRIGHT	MENU			▶		ON

Auto Brightness On

[A U T O B R I G H T N E S S O N]
- ■ ■ ■ ■ ■ ■ - - +

Auto Brightness Off

[A U T O B R I G H T N E S S O F F]
B R I G H T 1 5 ■ ■ ■ ■ ■ ■ ■ - - - - - - -

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	15 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

Version

M O D E L	N A M E	:	T 1 5 A 1
V E R S I O N		:	R 0 4
C K S		:	1 7 B 9
B R I G H T		:	0 3 5 8
V - S Y N C .		:	6 0 H z
H - S Y N C .		:	4 8 k H z

Language

L A N G U A G E
E N G L I S H
G E R M A N
F R E N C H
I T A L I A N
S P A N I S H

Factory Mode On Bright

F A C T O R Y	U S E D	O N L Y
8 0 0 L U X	:	0 3 5 8
3 5 0 L U X	:	0 5 6 5
1 0 0 L U X	:	0 A 5 C
L O A D	D E F A U L T	

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	16 OF 24

		PRODUCT GROUP	REV.	ISSUE DATE
		TFT-LCD PRODUCT	A	Feb. 12. 2001
7.4 Language Table				
ENGLISH	DEUTSCH	ESPAÑOL	FRANÇAIS	ITALIANO
ADJUSTMENT	EINST	AJUSTE	AJUST	REGOL
MANUAL	MANUAL	MANUAL	MANUEL	MANUAL
AUTO	AUTO	AUTO	AUTOM	AUTO
CLOCK	TAKT	RELOJ	HEURE	CLOCK
PHASE	PHASE	FASE	PHASE	FASE
H-POS	H-POS	POS H	POS H	POS O
V-POS	V-POS	POS V	POS V	POS V
GAIN CONTROL	BILDE INSTELLUNG	CTRL. GANANCIA	CTRL. LUMINOSIT	CTRL. GUADAGNO
BLACK LEVEL	SCHWARZWERT	NIVEL NEGRO	NIVEAU NOIR	LIV. NERO
CONTRAST	KONTRAST	CONTRASTE	CONTRASTE	CONTRASTO
DISPLAY COLORS	FARBEN	COLORES	COULEURS	COLORI
WHITE BALANCE	WEISS- ABGLEICH	BALANCE BLANCO	BALANCE COULEUR	BILANC. BIANCO
COOL	KALT	FRIJO	BLEU	CALD
STD	STD	ESTD	NORM	NORM
WARM	WARM	CAL	ROUG	FRED
USER	BENU	USRO	UTIL	USER
R-CONTRAST	R-KONTRAST	CONTRASTE R	CONTRASTE R	CONTRASTO R
G-CONTRAST	G-KONTRAST	CONTRASTE V	CONTRASTE H	CONTRASTO V
B-CONTRAST	B-KONTRAST	CONTRASTE A	CONTRASTE B	CONTRASTO B
MODE SELECT	SELECT MODUS	SELECCIÓN MODO	MODE SÉLECTION	SELEZ. MODO
OSD H-POSITION	OSD H-POSITION	OSD POSCIÓN H	OSD POSITION H	OSD POSIZIONE O
OSD V-POSITION	OSD V-POSITION	OSD POSCIÓN V	OSD POSITION V	OSD POSIZIONE V
400 LINES	400 LINES	400 LINES	400 LINES	400 LINES
SCALING	SKALIERUNG	GRADUACIÓN	CADRAGE	SCALAMENTO
LOW	NIEDRIG	BAJO	BAS	BASSO
HIGH	HOCH	ALTO	HAUT	ALTO
ALL RESET	ALL RESET	REINICIAR TODO	TOTAL RESET	RESET GLOBALE
ADJUSTMENT LOCKED	OSD GESPERRT	OSD BLOQUEADO	OSD VERROUILLÉ	OSD BLOCCATO
ADJUSTMENT UNLOCKED	OSD NICHT GESPERRT	OSD DESBLOQUEADO	OSD DÉVERROUILLÉ	OSD SBLOCCATO
ADJUSTING	EINST	AJUSTE	AJUST	REGOLAZIONE
OUT OF ADJUST	UNZUL. EINST.	FUERA DE AJUSTE	HORS LIMITE	NON REGOLABILE
OUT OF TIMING	UNZUL. FREQ.	FREC INCORR	HORS FRÉQUENCE	FUORI FREQUENZA
NO SIGNAL	KEIN SIGNAL	SIN SEÑAL	PAS DE SIGNAL	NESSUN SEGNALE
AUTO BRIGHTNESS	AUTO HELLIGKEIT	AUTO LUMINOSIDAD	AUTOM LUMINOSITÉ	AUTOM LUMINOSITÀ
BRIGHT	HELLK	BRILLO	LUMIN.	LUMIN
SPEC. NUMBER	SPEC. TITLE			PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification			17 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

8.0 RELIABILITY TEST

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 °C, 80 %RH, 240 hrs
4	High temperature operation test	Ta = 50 °C, 240 hrs
5	Low temperature operation test	Ta = 0 °C, 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (30 min), 100 cycle
7	Vibration test (non-operating)	Frequency : 10 ~ 500 Hz Gravity/AMP : 1.5G Period : X, Y, Z 30 min
8	Shock test (non-operating)	Gravity : 150G Pulse width : 6ms, half sine wave ± X, ± Y, ± Z Once for each direction
9	Electrostatic discharge test	Air : 150 pF, 330Ω, 15KV Contact : 150 pF, 330Ω, 8KV

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	18 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

9.0 ENVIRONMENT & SAFETY

9.1 Mercury Disposal Label

Cold cathode fluorescent lamp in LCD panel contains a small amount of mercury, Please follow local ordinances or regulation for disposal.	
---	----------------

9.2 Safety Label



SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	19 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001
10.0 HANDLING & CAUTIONS 10.1 Cautions when taking out the module • Pick the pouch only, when taking out module from a shipping package. 10.2 Cautions for handling the module • As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible. • As the LCD panel and backlight element are made from fragile glass material, impulse and pressure to the LCD module should be avoided. • As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning. • Do not pull the interface connector in or out while the LCD module is operating. • Put the module display side down on a flat horizontal plane. • Handle connectors and cables with care. 10.3 Cautions for the operation • When the module is operating, do not lose synchronous signals. If these signals were lost, the LCD panel would be damaged. • Obey the supply voltage sequence. If wrong sequence were applied, the module would be damaged. 10.4 Cautions for the atmosphere • Dewdrop atmosphere should be avoided. • Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer-packing pouch and under relatively low temperature atmosphere is recommended. 10.5 Cautions for the module characteristics • Do not apply fixed pattern data signal to the LCD module at product aging. • Applying fixed pattern for a long time may cause image sticking. 10.6 Other cautions • Do not disassemble and/or re-assemble LCD module. • Do not re-adjust variable resistor or switch etc. • When returning the module for repair or etc, please pack the module not to be broken. We recommend using the original shipping packages.			
SPEC. NUMBER	SPEC. TITLE	PAGE	
S864 - 1051	HM15X11-200 (Sh) Product Specification	20 OF 24	

**PRODUCT GROUP**

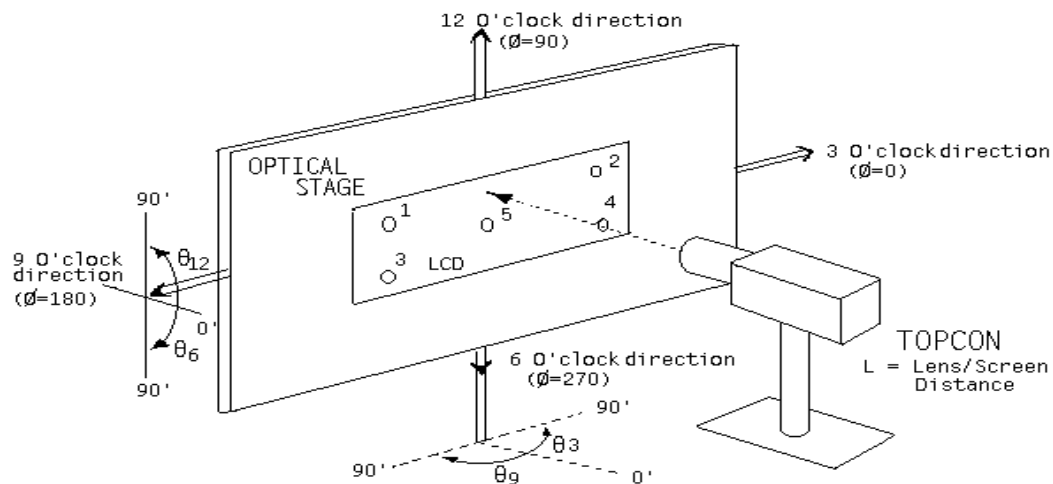
TFT-LCD PRODUCT

REV.

A

ISSUE DATE

Feb. 12. 2001

11.0 APPENDIX**Figure 1. Measurement Set Up****Figure 2. Average Luminance Measurement Locations & Uniformity Measurement Locations**

	Column	256	512	768
	Row	2		3
192			1	
384		4		5
576				

SPEC. NUMBER

S864 - 1051

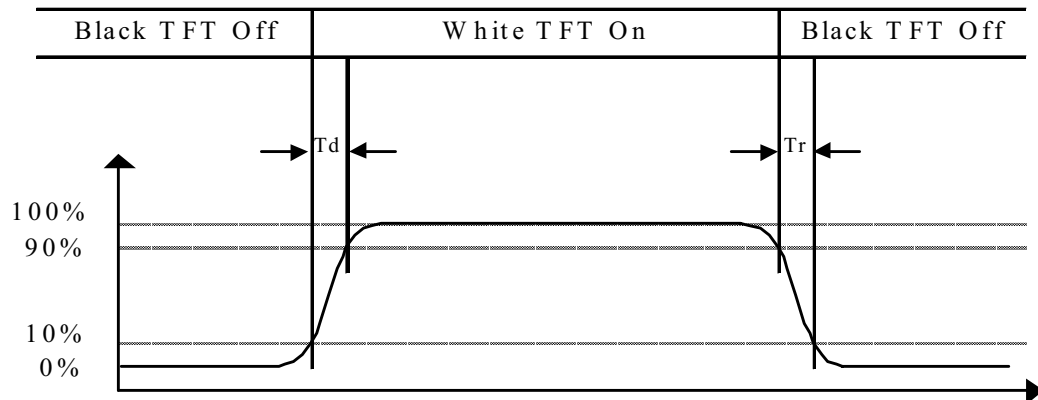
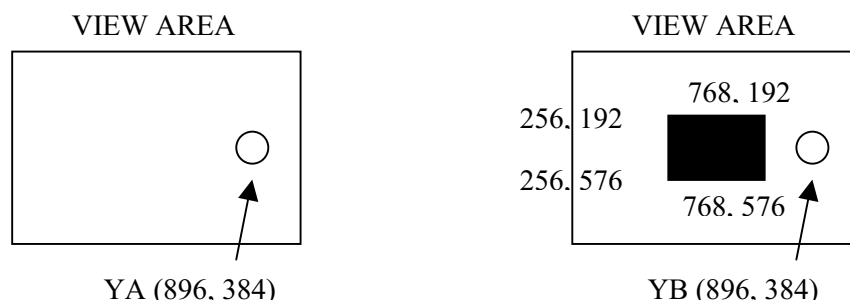
SPEC. TITLE

HM15X11-200 (Sh) Product Specification

PAGE

21 OF 24

	PRODUCT GROUP	REV.	ISSUE DATE
	TFT-LCD PRODUCT	A	Feb. 12. 2001

Figure 3. Response Time Testing**Figure 4. Cross Modulation Test Description**

$$\text{Cross-Talk} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where:

Y_A = Initial luminance of measured area (cd/m^2)

Y_B = Subsequent luminance of measured area (cd/m^2)

The location measured will be exactly the same in both patterns.

SPEC. NUMBER	SPEC. TITLE	PAGE
S864 - 1051	HM15X11-200 (Sh) Product Specification	22 OF 24


PRODUCT GROUP

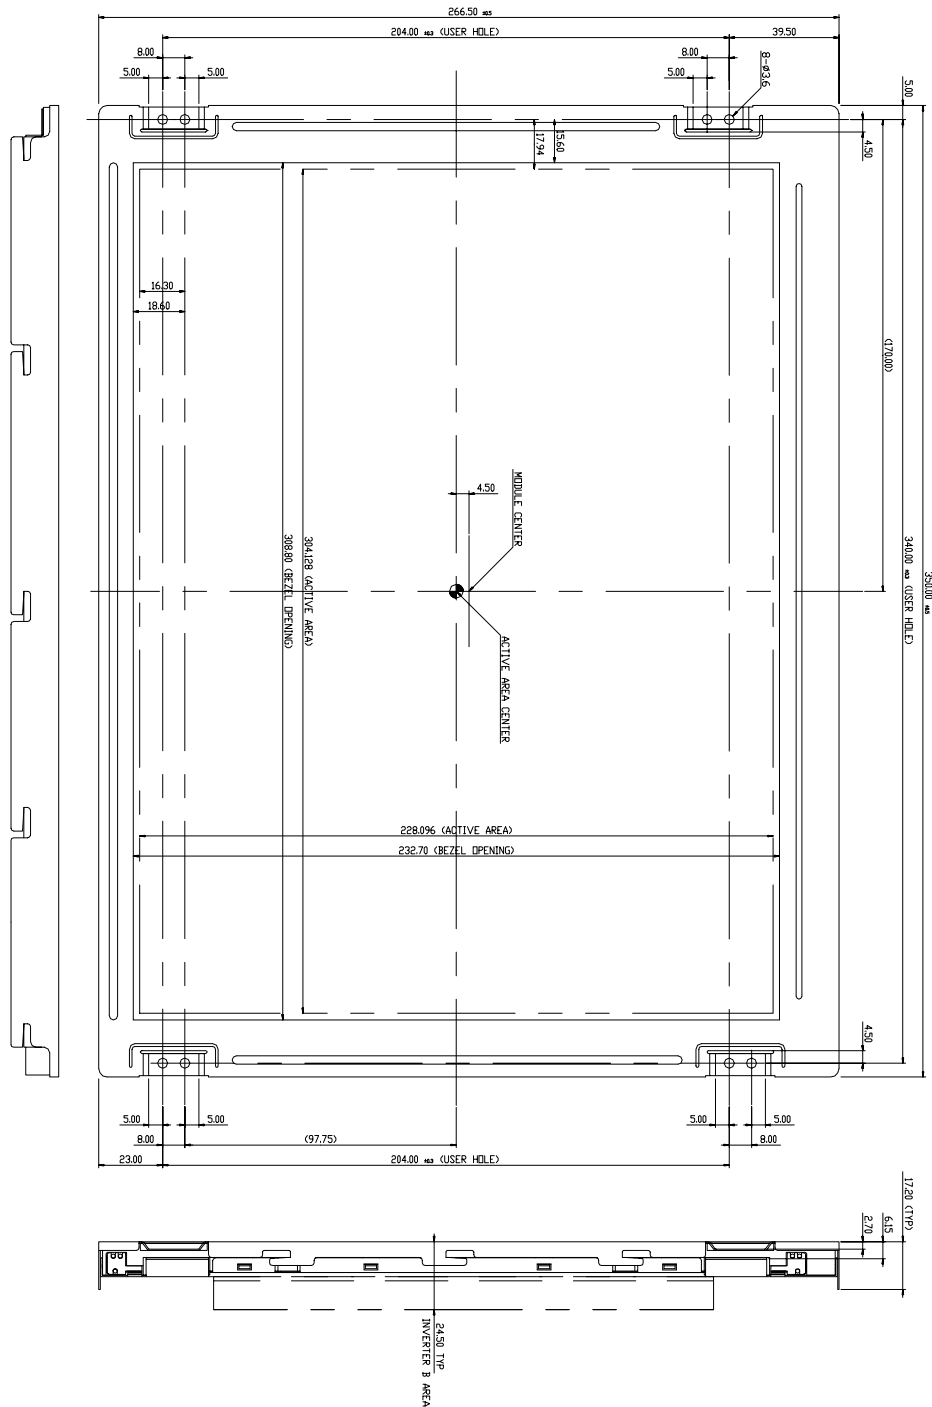
TFT-LCD PRODUCT

REV.

A

ISSUE DATE

Feb. 12. 2001

Figure 5. TFT-LCD Module Outline Dimensions (Front view)

SPEC. NUMBER

S864 - 1051

SPEC. TITLE

HM15X11-200 (Sh) Product Specification

PAGE

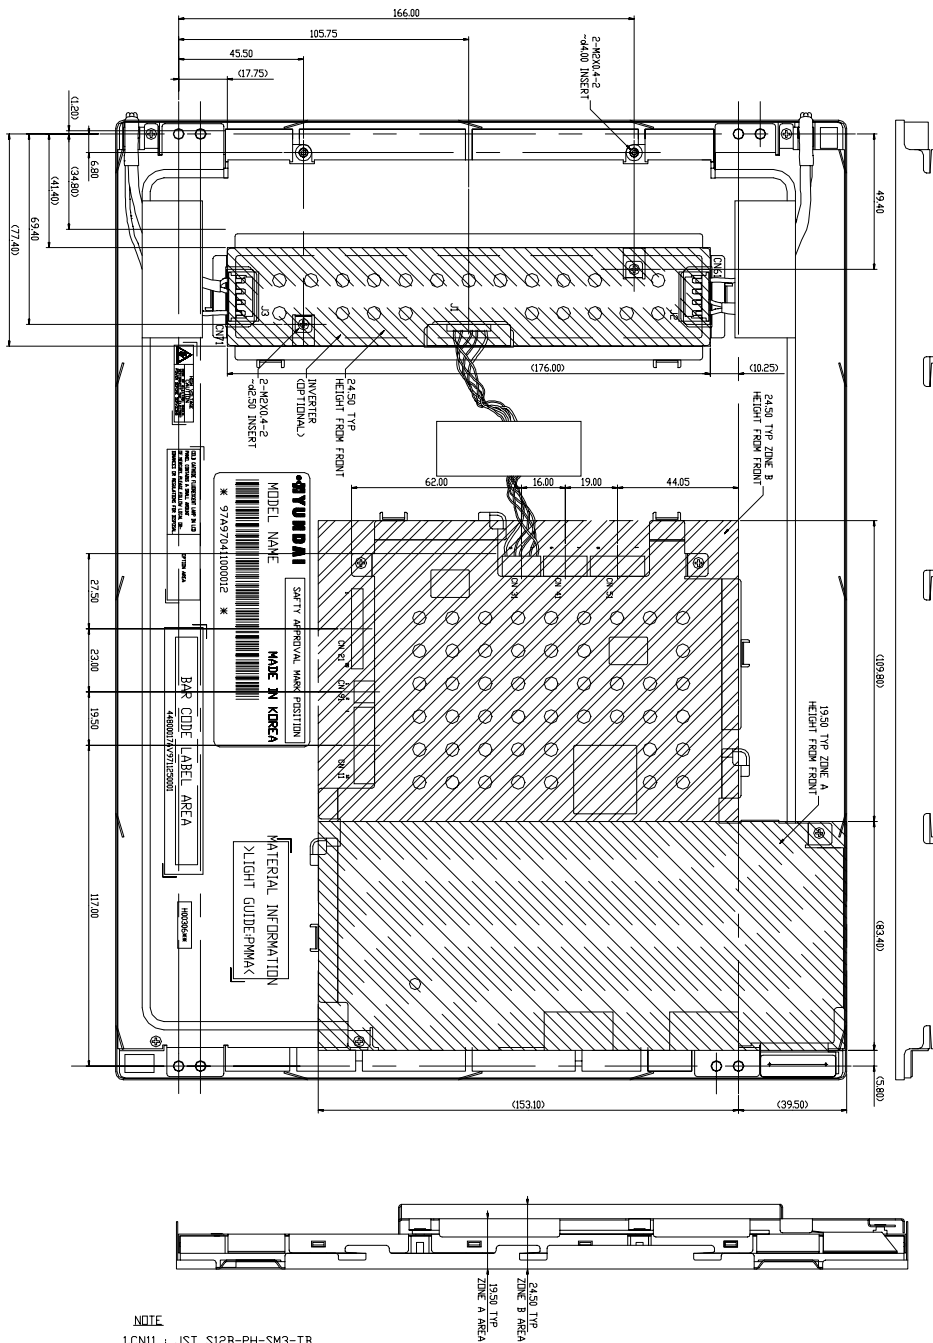
23 OF 24

REV.

TFT-LCD PRODUCT

AFeb. 12, 2001

Figure 6. TFT-LCD Module Outline Dimensions (Rear view)



NOTE

- 1.CN11 : JST S12B-PH-SM3-TB
2.CN2 : JAE FI-SEB20P-HF10
3.CN31 : JST S5B-PH-SM3-TB, MATE CN - PHR-5P
4.CN41 : JST S6B-PH-SM3-TB
5.CN51 : JST S8B-PH-SM3-TB
6.CN61,71 : JST BHR-04VS-1
7.J2,J3 : JST SM044A.03B-BHS-TB
8.J1 : MOLEX 53261-0890, MATE CN - 51021-0800
9.CN91 : JST S2B-PH-SM3-TB
10.OTHER SPECIFICATION: REFERS TO SPEC SHEET
11.GENERAL TOLERANCE: ±0.5
12.CONTACT PCB'S SHIELD COVER INCLUDES EMI GASKET

SPEC. NUMBER

SPEC. TITLE

PAGE

S864 - 1051

HM15X11-200 (Sh) Product Specification

24 OF 24