

## Low power consumption, Low ESR Cap. Compatible HM6216 Series

### General Description


HM6216 series are highly precise, low power consumption, positive voltage regulators manufactured using CMOS technologies .The series provides large currents with a significantly small dropout voltage.

The series is compatible with low ESR ceramic capacitors .The current limiter's foldback circuit also operates as a short protect for the output current limiter and the output pin.

### Features

- Highly Accurate:  $\pm 1\%$
- Output voltage range: 1.0V~5.0V
- Low power consumption: 4uA(TYP.)
- Large output current: 300mA ( $V_{IN}=4.3V, V_{OUT}=3.3V$ )
- Input voltage: up to 6 V
- Dropout voltage:  
0.11V at 100mA and 0.24V at 200mA
- Excellent Input Stability
- Be available to regulator and reference voltage
- Packages:SOT23-3, SOT89-3, SOT23, TO-92


### Selection Guide

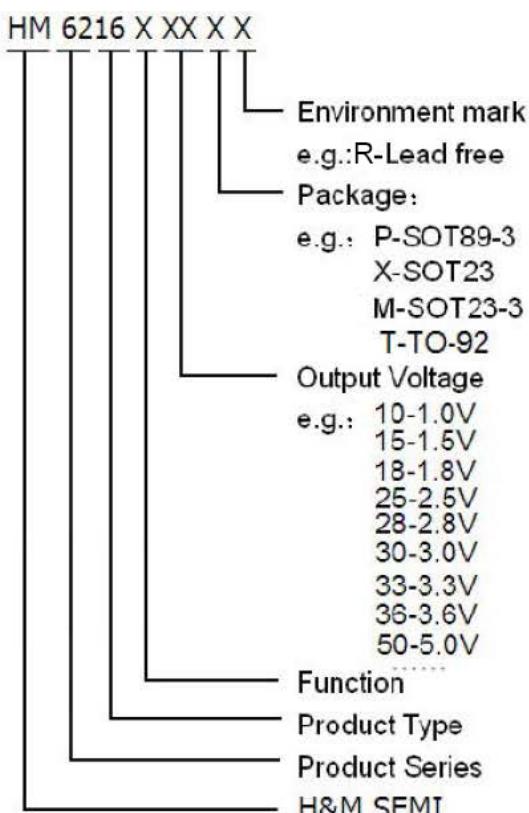


### Typical Application

- Battery powered equipment
- Communication tools
- Mobile phones
- Portable games
- Portable AV systems
- Cameras, Video systems
- Reference voltage sources

### Typical Application Circuit

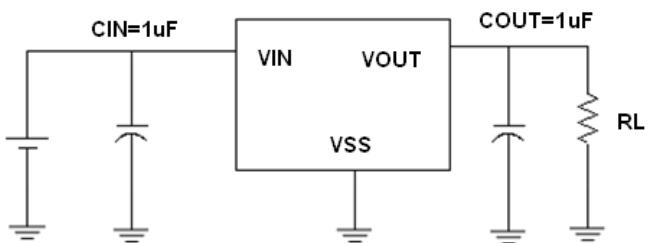

## Pin Configuration

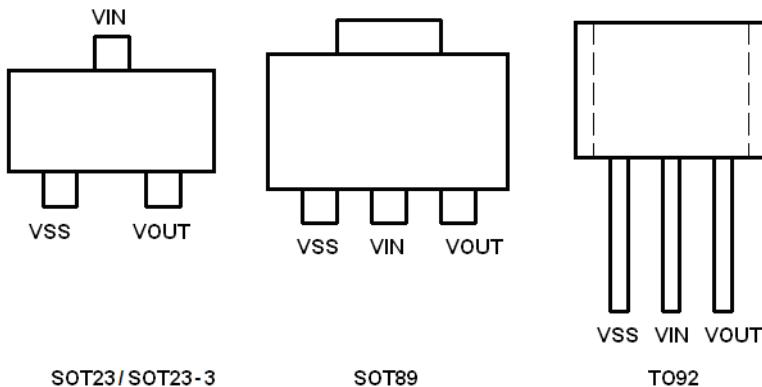

## Pin Assignment

### HM6216Axx

Pin				Name	Function
M3	P	X	T		
SOT23-3	SOT89-3	SOT23	TO-92		
1	1	1	1	VSS	Ground
2	3	2	3	VOUT	Output
3	2	3	2	VIN	Input


### HM6216Bxx

Pin	Name	Function
P		
SOT89-3		
2	VSS	Ground
1	VOUT	Output
3	VIN	Input

## Absolute Maximum Ratings

Parameter	Symbol	Description	Units
Input Voltage	$V_{IN}$	6.5	V
Output Current	$I_{OUT}$	390	mA
Output Voltage	$V_{OUT}$	$V_{SS}-0.3 \sim V_{OUT}+0.3$	V
Power Dissipation	SOT23-3	$P_d$	mW
	SOT89-3	$P_d$	mW
	SOT23	$P_d$	mW
	TO-92	$P_d$	mW
Operating Ambient Temperature	$T_{Opr}$	-25 ~ +85	°C
Storage Temperature	$T_{stg}$	-40 ~ +125	°C

## Block Diagram

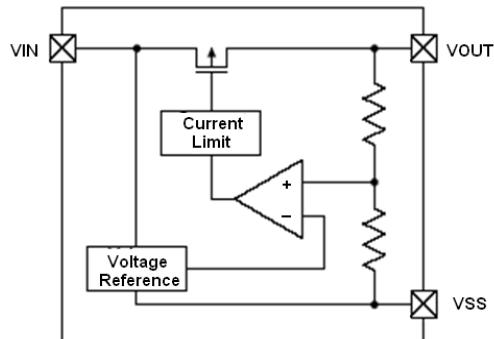

## Electrical Characteristics

### HM6216-3.3V

( $V_{IN} = V_{OUT} + 1V$ ,  $C_{IN} = C_{OUT} = 1\mu F$ ,  $T_a = 25^\circ C$  Unless otherwise stated)

PARAMETER	SYMBOL	CONDITION	MIX	TYP	MAX	UNIT
Output Voltage	$V_{OUT}(E)$ (Note 2)	$I_{OUT} = 10mA$ , $V_{IN} = V_{OUT} + 1V$	X 0.99	$V_{OUT}(T)$ (Note 1)	X 1.01	V
Input Voltage	$V_{IN}$				6	V
Maximum Output Current	$I_{OUT}$ (max)	$V_{IN} = V_{OUT} + 1V$		300	350	mA
Load Regulation	$\Delta V_{OUT}$	$V_{IN} = V_{OUT} + 1V$ $1mA \leq I_{OUT} \leq 100mA$		9	18	mV
Dropout Voltage (Note 3)	$V_{dif1}$	$I_{OUT} = 80mA$		100	120	mV
	$V_{dif2}$	$I_{OUT} = 200mA$		240	260	mV
Supply Current	$I_{SS}$	$V_{IN} = V_{OUT} + 1V$		4	8	$\mu A$
Line Regulations	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT} = 40mA$ $V_{OUT} + 1V \leq V_{IN} \leq 6V$		0.07	0.2	%/V
Power Supply Ripple Rejection Ratio	PSRR	$V_{in} = [V_{OUT} + 1]V$ +1Vp-pAC $I_{OUT} = 10mA, f = 1kHz$		50		dB
Short Circuit Current	$I_{short}$	$V_{in} = V_{OUT}(T) + 1V$ $V_{OUT} = V_{SS}$		30	60	mA
Over Current Protection	$I_{limit}$	$V_{IN} = V_{OUT} + 1V$		420	450	mA


### Note :

1.  $V_{OUT}(T)$  : Specified Output Voltage
2.  $V_{OUT}(E)$  : Effective Output Voltage ( Ie. The output voltage when " $V_{OUT}(T) + 1.0V$ " is provided at the  $V_{IN}$  pin while maintaining a certain  $I_{OUT}$  value.)
3.  $V_{dif}$  :  $V_{IN1} - V_{OUT}(E)$ '  
 $V_{IN1}$  : The input voltage when  $V_{OUT}(E)$ ' appears as input voltage is gradually decreased.  
 $V_{OUT}(E)'$  = A voltage equal to 98% of the output voltage whenever an amply stabilized  $I_{OUT}$  { $V_{OUT}(T) + 1.0V$ } is input.

**Type Characteristics ( HM6216A33 )**


(1) Output Voltage VS. Output Current

( $V_{IN}=V_{OUT}+1$ ,  $T_a = 25^\circ\text{C}$ )

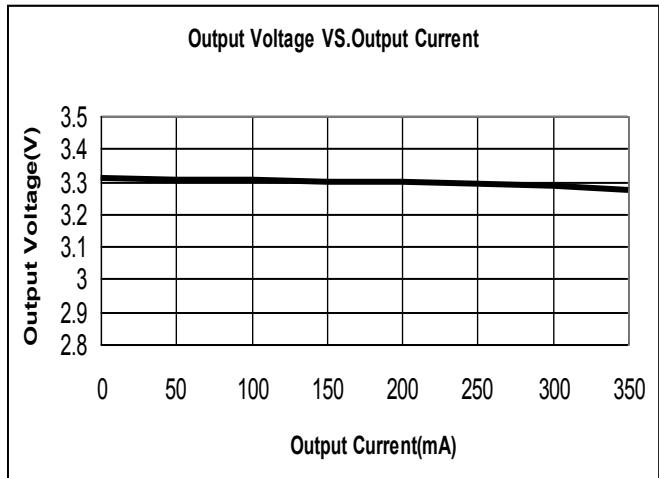


(2) Output Voltage VS. Input Voltage

( $T_a = 25^\circ\text{C}$ )

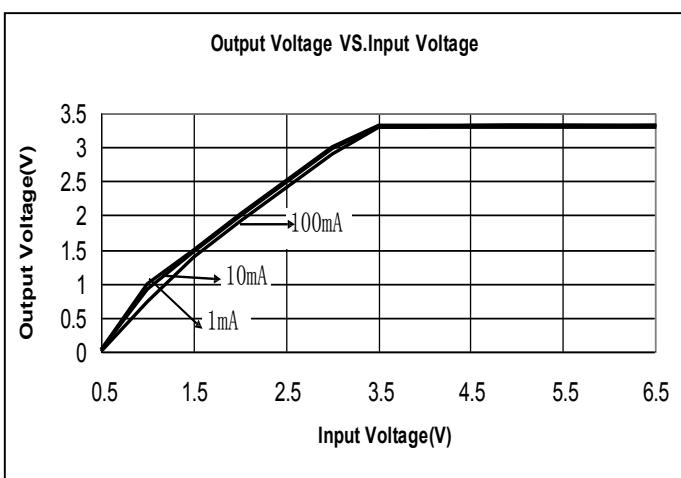


(3) Dropout Voltage VS. Output Current

( $V_{IN}=V_{OUT}+1$ ,  $T_a = 25^\circ\text{C}$ )

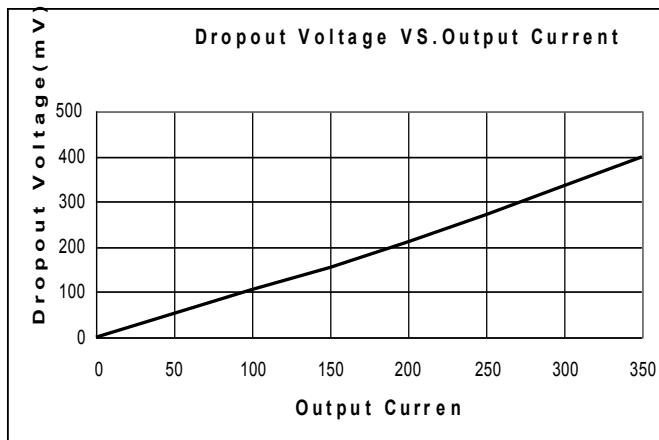


(4) Supply Current VS. Input Voltage

( $T_a = 25^\circ\text{C}$ )

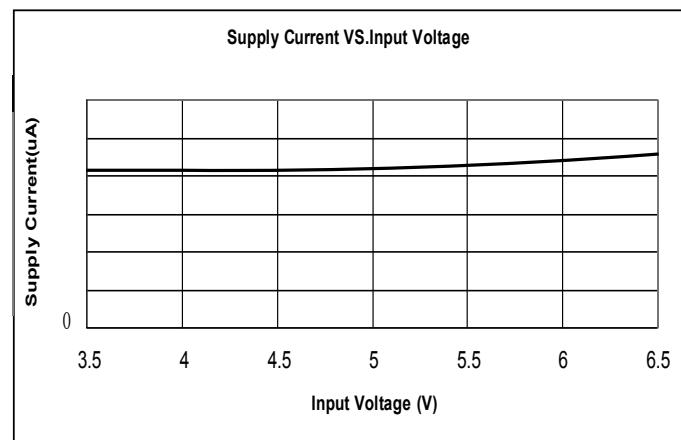


(5) Output Voltage VS. Temperature ( $V_{IN}=V_{OUT}+1$ ,  $I_{OUT} = 10\text{mA}$ )

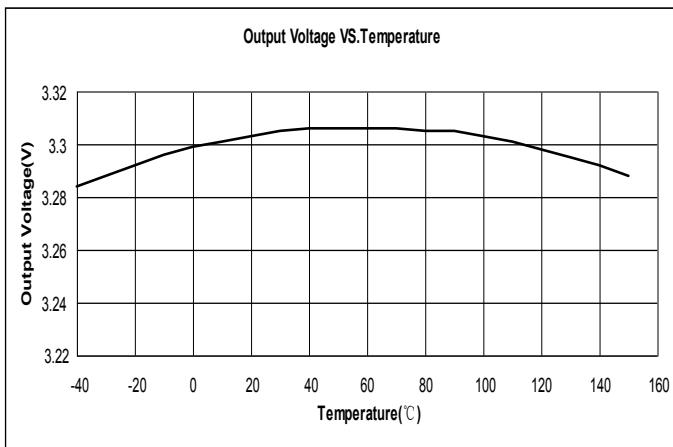


## Packaging Information

● SOT89-3

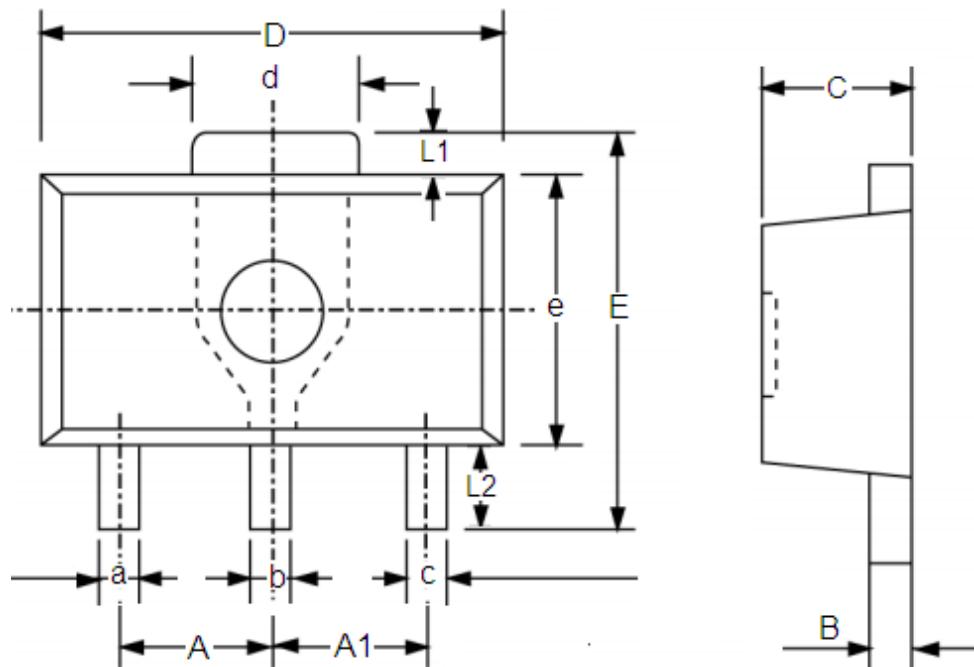


DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	1.4	1.6	0.0551	0.0630
A1	1.4	1.6	0.0551	0.0630
a	0.36	0.48	0.0142	0.0189
b	0.41	0.53	0.0161	0.0209
c	0.36	0.48	0.0142	0.0189
d	1.4	1.75	0.0551	0.0689
B	0.38	0.43	0.015	0.0169
C	1.4	1.6	0.0551	0.0630
D	4.4	4.6	0.1732	0.181
E	-	4.25	-	0.1673
e	2.4	2.6	0.0945	0.1023
L1	0.4	-	0.0157	-
L2	0.8	-	0.0315	-

● SOT23-3

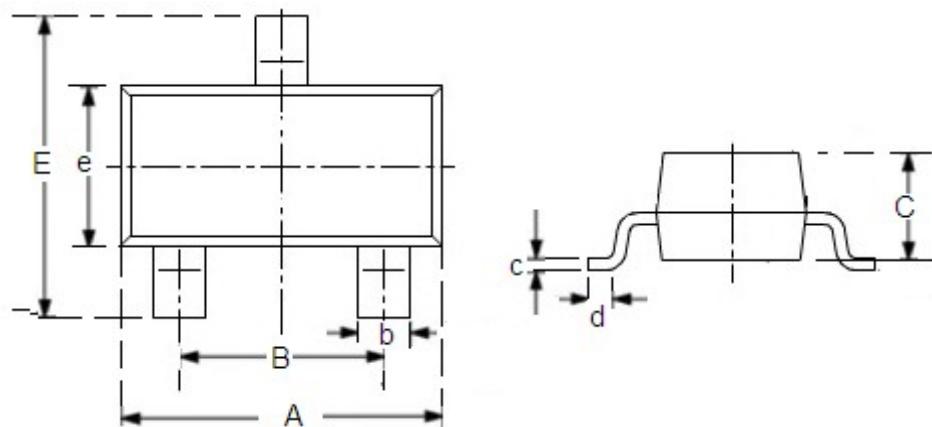


DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	2.7	3.1	0.1063	0.122
B	1.7	2.1	0.0669	0.0827
b	0.35	0.5	0.0138	0.0197
C	1.0	1.2	0.0394	0.0472
c	0.1	0.25	0.0039	0.0098
d	0.2	-	0.0079	-
E	2.6	3.0	0.1023	0.1181
e	1.5	1.8	0.059	0.0708

● SOT23

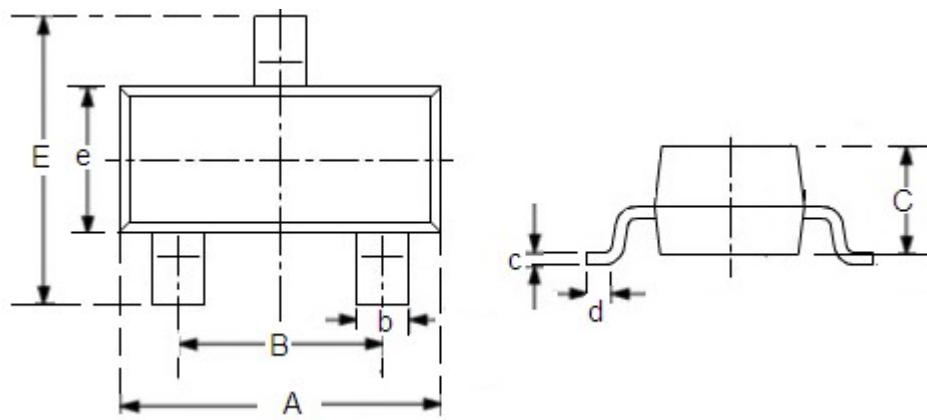

DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	2.7	3.1	0.1063	0.122
B	1.7	2.1	0.0669	0.0827
b	0.35	0.5	0.0138	0.0197
C	1.0	1.2	0.0394	0.0472
c	0.1	0.25	0.0039	0.0098
d	0.2	-	0.0079	-
E	2.1	2.64	0.0827	0.1039
e	1.2	1.4	0.0472	0.0551

● TO-92

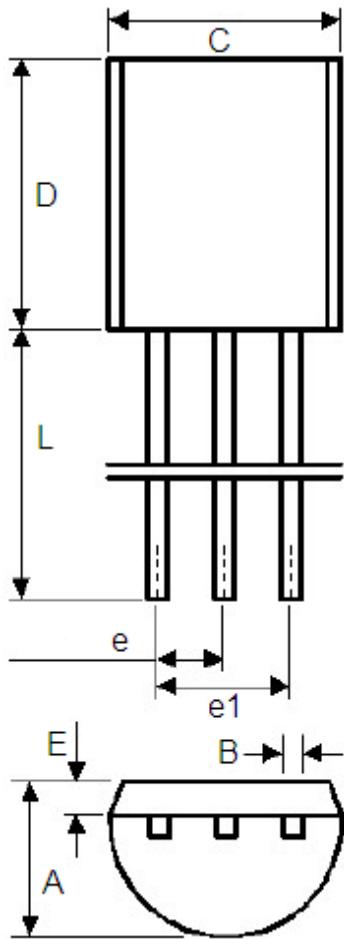

	Min	Max	Min	Max
A	3.4	3.8	0.13386	0.1496
B	0.3	0.5	0.0118	0.0197
C	4.4	4.8	0.1732	0.189
D	4.4	4.8	0.1732	0.189
E	0.9	1.5	0.0354	0.059
e	1.17	1.37	0.046	0.0539
e1	2.39	2.69	0.094	0.1059
L	12	16	0.4724	0.6299