

## 5V, 3.5A Low Side Load Switch

### DESCRIPTION

HM9713 is a low side load switch that is capable of providing a low resistance path between negative load terminal and the ground terminal and limits the load current up to 3.5A. The internal load switch is a low RDS(on) MOSFET minimizing power dissipation during normal operation. During a short-circuit event, it enters into a hiccup mode where the power switch turns on and off periodically to prevent heating up of the IC due to high power and detect when the dead short condition is removed in order to automatically restart again. It also has other protection such as input UVLO, and over temperature protection.

HM9713 is housed in a tiny SOT23-6 package.

### FEATURES

- ◆ Adjustable Current limit up to 3.5A
- ◆ Low RDS(on): 55 mΩ
- ◆ Hiccup during Dead Short
- ◆ SOT23-6 Package


### APPLICATIONS

- ◆ USB ports
- ◆ Power bank
- ◆ Notebook computer

### ORDERING INFORMATION


PART	PACKAGE PIN	TOP MARK
HM9713MR	SOT23-6	ADYW AD: Product ID YW: Date Code

### TYPICAL APPLICATION

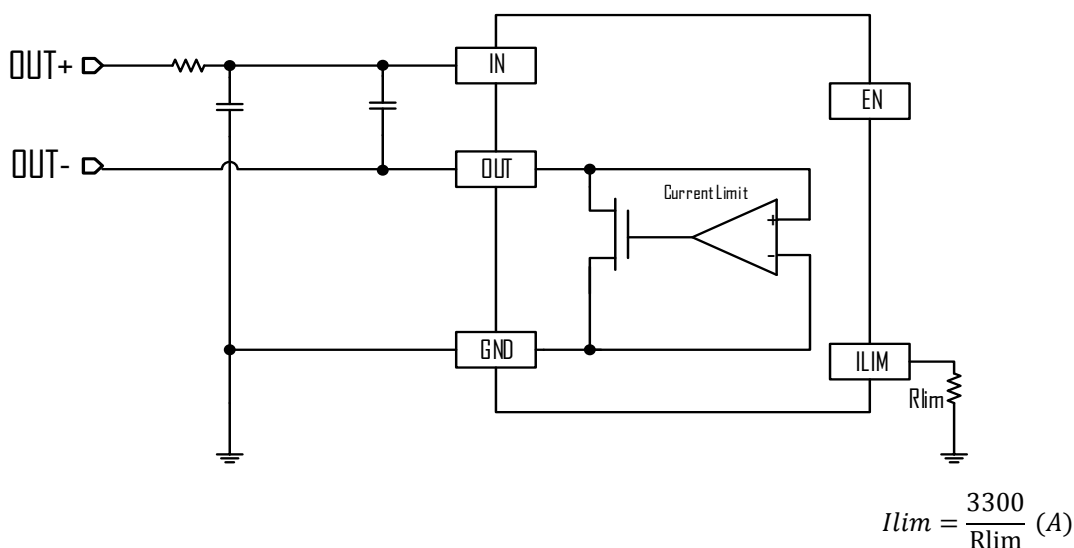

Typical Application Circuit

## PIN CONFIGURATION

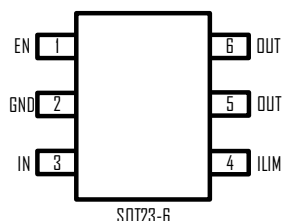

## ABSOLUTE MAXIMUM RATINGS

(Note: Exceeding these limits may damage the device. Exposure to absolute maximum rating conditions for long periods may affect device reliability.)

All Pin Voltage	-0.3V to 6.5V
SW to ground current	Internally limited
Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-55°C to 150°C
Thermal Resistance	$\theta_{JA}$
SOT23-6	190 °C/W

## ELECTRICAL CHARACTERISTICS

( $V_{IN} = 5V$ , unless otherwise specified. Typical values are at  $T_A = 25^\circ C$ .)





PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage Range		2.5		5.5	V
Input Clamped Voltage			5.5		V
Input UVLO	Rising, Hysteresis=250mV		2.35		V
Input Supply Current	$R_{ILIM}=20K$		100		$\mu A$
Input Shutdown Current			0.5	1.5	$\mu A$
Power Switch On Resistance	$I_{SW} = 500mA$		50		$m\Omega$
	$I_{SW} = 500mA, -40^\circ C \leq T_J \leq 120^\circ C$			80	$m\Omega$
Current limit Threshold	$R_{ILIM}=1K$		3.5		A
	$R_{ILIM}=2K$		1.75		A
	$R_{ILIM}=3.5K$		1.00		A
Current limit Foldback	$R_{ILIM}=1K$		1		A
Current limit Foldback Voltage			$V_{IN}-IV$		V
Short-circuit hiccup on time			10		ms
Short-circuit hiccup off time			160		ms
EN input pull-up resistance			2000		$k\Omega$
EN Input Logic High threshold				1	V
EN Input Logic Low threshold		0.66			V
Thermal Shutdown			160		$^\circ C$
Thermal Shutdown Hysteresis			15		$^\circ C$

## PIN DESCRIPTION

PIN #	NAME	DESCRIPTION
1	EN	Enable pin. Tie high to enable the power switch, tie low to disable.
2	GND	Ground
3	IN	Input power for internal circuitry. Bypass with a 10 $\mu$ F cap to OUT and a 1 $\mu$ F cap to GND.
4	ILIM	Current limit external setting pin. Connect a resistor ( $R_{lim}$ ) between this pin and ground to set the current limit. And it follows the equation: $I_{lim}=3300/R_{lim}$ (A)
5,6	OUT	Output power pin. Connect to the negative terminal of the external load


## TYPICAL CHARACTERISTICS

(Typical values are at  $T_A = 25^{\circ}\text{C}$  unless otherwise specified.)

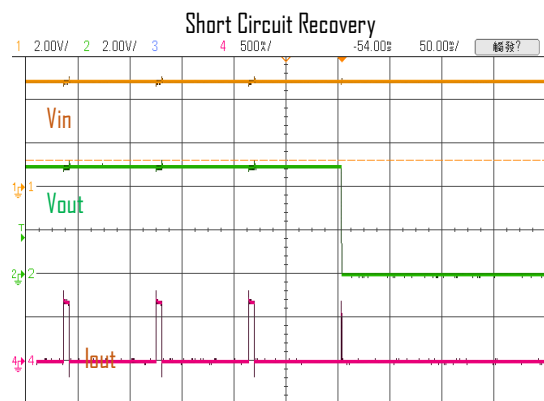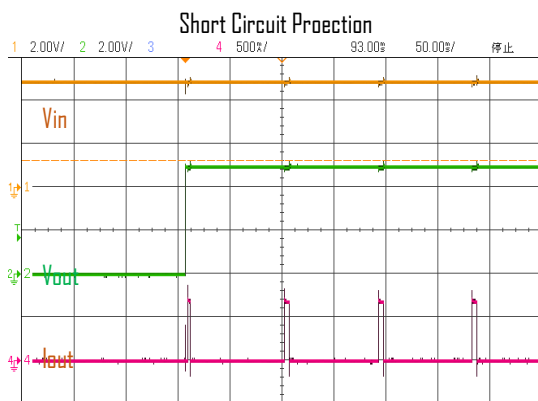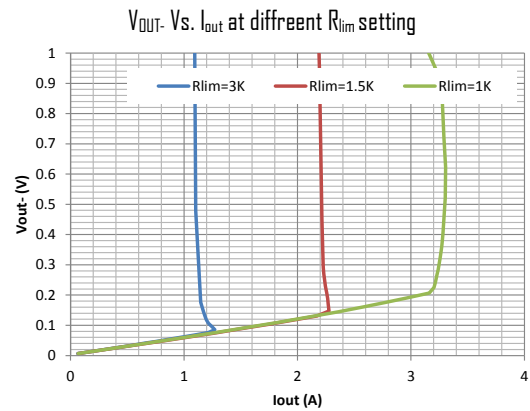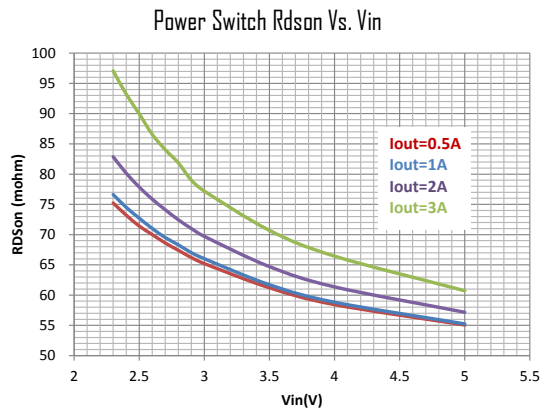


## PCB GUIDELINE

To guarantee a good output current control characteristic, the output capacitance is always recommended to be as large as possible, such as a 10 $\mu\text{F}$  MLCC capacitor in parallel with a 100 $\mu\text{F}$  electrolytic capacitor as shown in the demo board below. Please also refer to the demo board that to place the input capacitor and output capacitor just next to the chip.

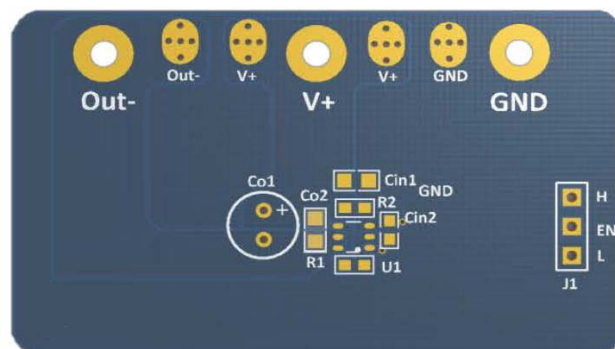

## PACKAGE OUTLINE

Package:SOT23-6

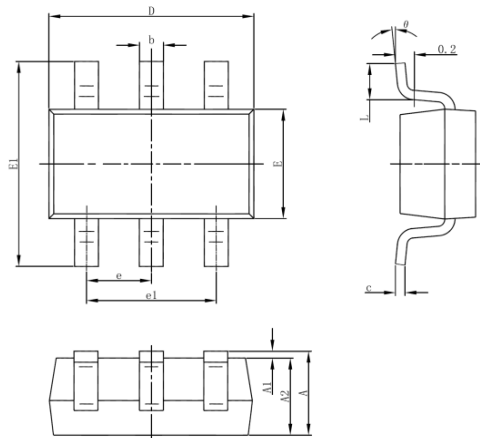

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
$\theta$	0°	8°	0°	8°