




**HO1056**

**310.0 MHz  
SAW  
Oscillator**

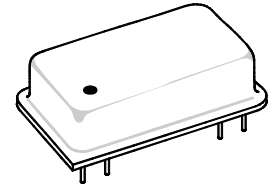

**Dip 14-8 Case**

- **SAW Frequency Stabilization**
- **Fundamental-Mode Oscillation at 310.0 MHz**
- **0.8" x 0.5" x 0.25" Metal Dip Case**

This general-purpose oscillator is stabilized by surface-acoustic-wave (SAW) technology. Fundamental oscillation at 310.0 MHz eliminates all internally generated spurious outputs except integral harmonics of 310.0 MHz. The compact size of the rugged, metal, hermetically-sealed case makes this oscillator suitable for a variety of applications.

www.DataSheet4U.com

**Absolute Maximum Ratings**

Rating		Value	Units
DC Supply Voltage		0 to +13	VDC
Ambient Temperature	Powered	-40 to +70	°C
	Storage	-40 to +85	

**Electrical Characteristics**

Characteristic		Sy	Notes	Mini-	Typical	Maxi-	Units
Operating Frequency	Absolute Frequency	$f_o$	1, 7	309.900	310.0	310.100	MHz
	Tolerance from 310.0 MHz	$\Delta f_o$					
RF Output Power		$P_o$	3, 6	+10	+13	+4	dBm
Spurious Outputs	Second Harmonics		3, 6, 7			-15	dBc
	Third and Higher Harmonics					-20	
	Nonharmonic				<-80	-60	
RF Impedance	Nominal Impedance	$Z_o$	3		50		$\Omega$
	Operating Load VSWR	$\Gamma_L$	3, 5			1.5:1	
DC Power Supply	Operating Voltage	$V_{CC}$	3, 6	11.4	12.0	12.6	VDC
	Operating Current	$I_{CC}$					
Operating Ambient Temperature		$T_A$	3, 6	-15		+65	°C
Lid Symbolization (YY=Year, WW=Week)				RFMHO1056 YYWW			




**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling. COCOM CAUTION: Approval by the U.S. Department of Commerce is required prior to export of this device.**


**Notes:**

1. One or more of the following United States patents apply: 4,616,197; 4,610,681; and 4,761,616.
2. Unless noted otherwise, all specifications are listed at  $T_A = +25^\circ\text{C} \pm 2^\circ\text{C}$ ,  $V_{CC} =$  nominal voltage  $\pm 0.01$  VDC, and load impedance =  $50 \Omega$  with VSWR  $\leq 1.5:1$ .
3. The design, manufacturing process, and specifications of this device are subject to change without notice.
4. Applies to oscillator only and not to sidebands caused by external electrical or mechanical sources. (Dedicated external voltage regulation with low-frequency filtering for the DC power supply and proper circuit board layout are recommended for optimum spectral purity.)
5. For specified maximum operating load VSWR (any angle) at  $F_o$ . (No instability or damage will occur for any passive load impedance.)
6. For any combination of  $V_{CC}$  and  $T_A$  within the specified operating ranges.
7. Applies for any combination of Note 5 and 6 conditions.

**BLOCK DIAGRAM**




**ELECTRICAL CONNECTIONS**

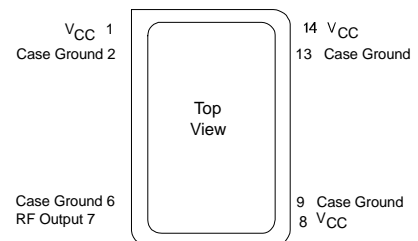

## DIP14-8


Metal Dual-Inline Package with 8 leads in a 14-lead DIP configuration

www.DataSheet4U.com

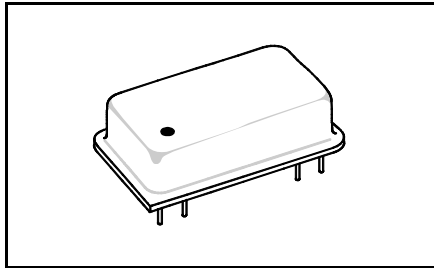

Dimension	mm		Inches	
	MIN	MAX	MIN	MAX
A	—	20.45	—	0.805
B	—	12.83	—	0.505
C	—	6.35	—	0.250
D	0.40	0.51	0.016	0.020
E	0.64 Nominal		0.025 Nominal	
F	7.62 Nominal		0.300 Nominal	
G	2.54 Nominal		0.100 Nominal	
H	15.24 Nominal		0.600 Nominal	
K	5.97	6.73	0.235	0.265
L	1.30	—	0.051	—
M	—	11.18	—	0.440
N	—	18.80	—	0.740
R	1.75	2.26	0.069	0.089

Top View

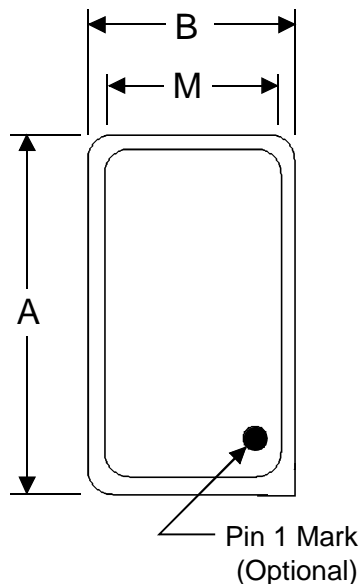

Bottom View

