

SANYO	No. 2827	<h1>HPA150R</h1> NPN Triple Diffused Planar Silicon Composite Transistor Very High-Definition Color Display, Horizontal Deflection Output Applications
--------------	----------	---

Features

- High speed (t_f typ = 100ns)
- High breakdown voltage ($V_{CBO} = 1500V$)
- High-speed damper diode placed in one package ($t_{fr} = 0.2\mu s$ max)
- Adoption of MBIT process
- High reliability (adoption of HVP process)

Absolute Maximum Ratings at $T_a = 25^\circ C$

			unit
Collector-to-Base Voltage	V_{CBO}	1500	V
Collector-to-Emitter Voltage	V_{CEO}	800	V
Emitter-to-Base Voltage	V_{EBO}	6	V
Collector Current	I_C	15	A
Peak Collector Current	i_{cp}	35	A
Diode Forward Current	I_O	10	A
Peak Diode Forward Current	i_{op}	$PW \leq 100\mu s, duty \leq 50\%$	15 A
Total Power Dissipation	P_T	$T_c = 25^\circ C$	180 W
Junction Temperature	T_j		150 $^\circ C$
Storage Temperature	T_{stg}		- 55 to + 150 $^\circ C$

Electrical Characteristics at $T_a = 25^\circ C$


			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 1500V, I_E = 0$			5	mA
Collector Sustain Voltage	$V_{CEO(sus)}$	$I_C = 100mA, I_B = 0$	800			V
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 4V, I_C = 0$			1.0	mA
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10A, I_B = 2.5A$			5	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 10A, I_B = 2.5A$			1.5	V
DC Current Gain	$h_{FE(1)}$	$V_{CE} = 5V, I_C = 1.0A$	8			
	$h_{FE(2)}$	$V_{CE} = 5V, I_C = 10A$	4*		10*	

Continued on next page.


* The HPA150R is classified by 10A h_{FE} as follows :

h _{FE}	4 to 6	5 to 8	7 to 10
Rank	2	3	4

Switching Time Test Circuit

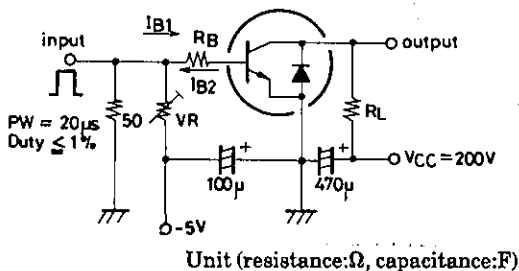







Package Dimensions 2048
(unit: mm)

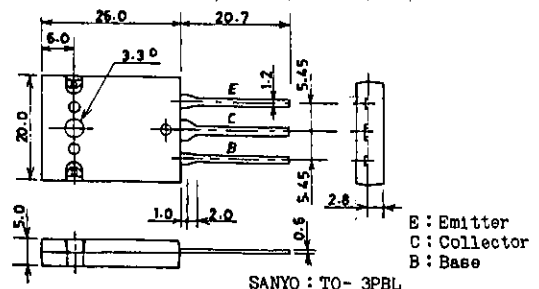





HPA150R

Continued from preceding page.

			min	typ	max	unit
Storage Time	t_{stg}	$I_C = 8A, I_{B1} = 1.6A, I_{B2} = -3.2A$			3.0	μs
Fall Time	t_f	$I_C = 8A, I_{B1} = 1.6A, I_{B2} = -3.2A$		0.1	0.2	μs
Diode Forward Voltage	$V_{F(1)}$	$I_F = 10A$			3	V
	$V_{F(2)}$	$I_F = 15A$			5	V
Diode Reverse Recovery Time	t_{rr}	$I_F = -I_R = 100mA$			1	μs
Diode Forward Recovery Time	t_{fr}	$I_F = 100mA$	0.1	0.2		μs

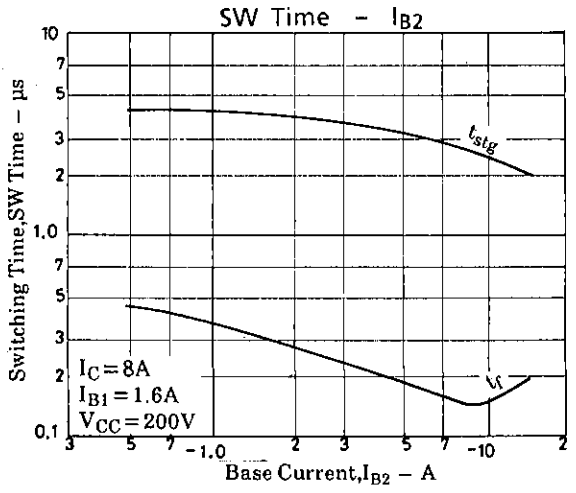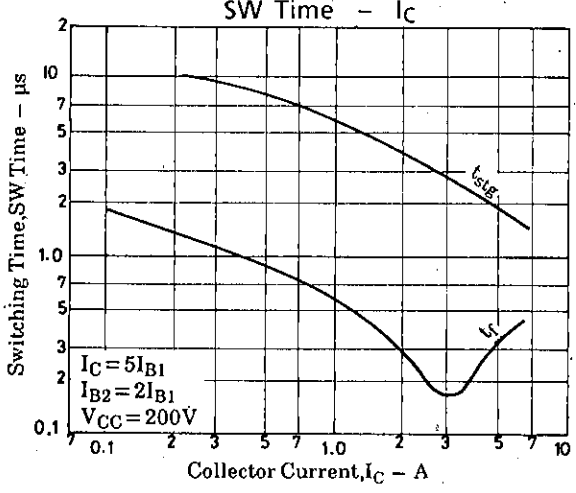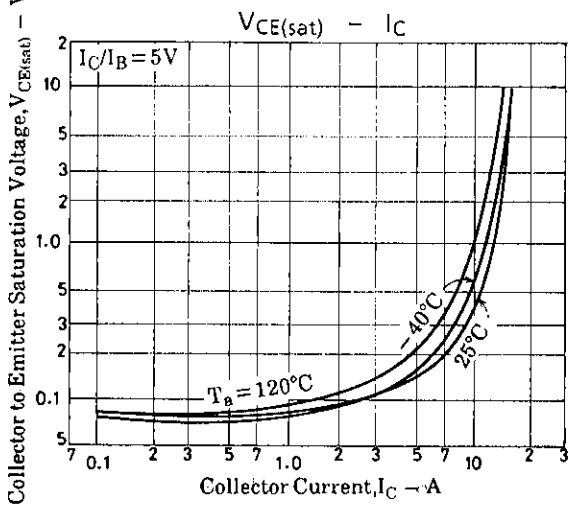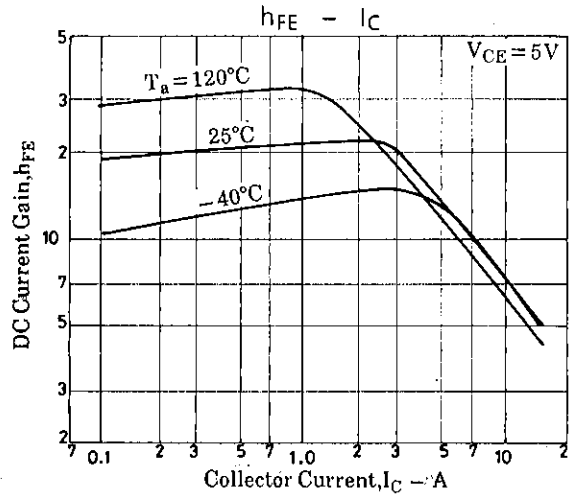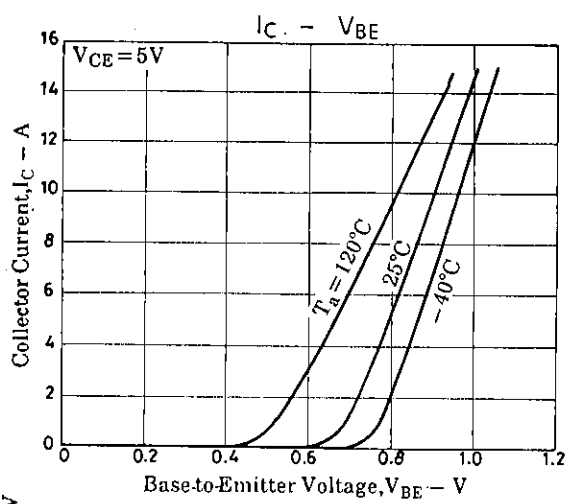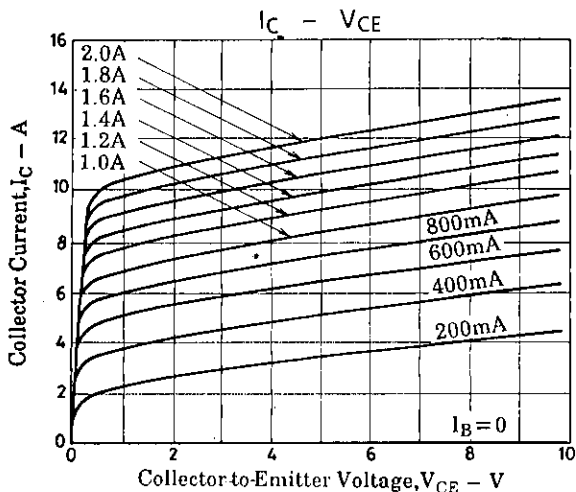

HPA150R

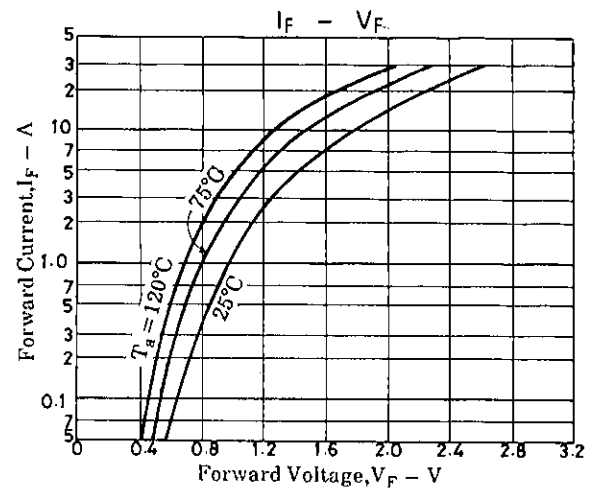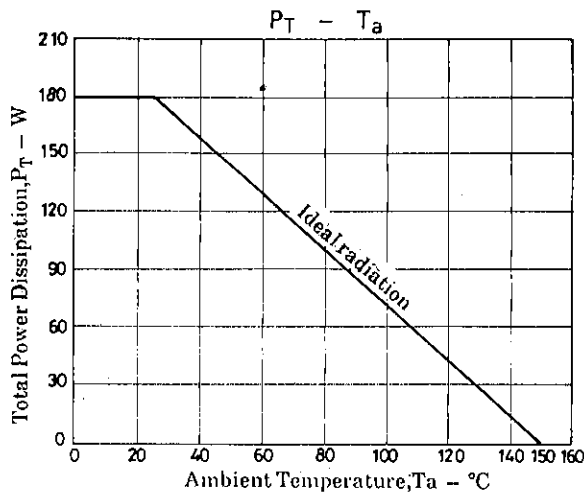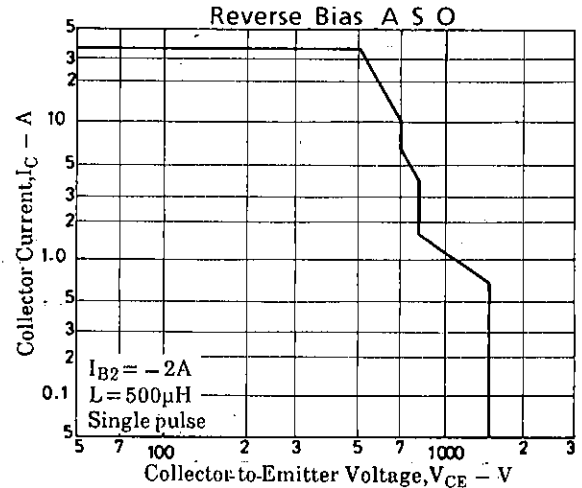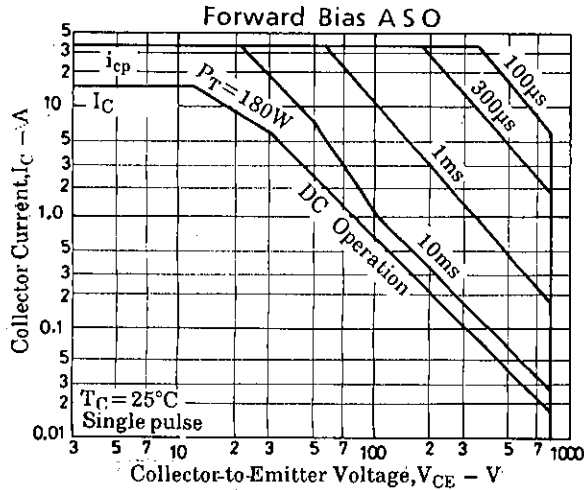

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.