

HPS35 Series

350 - 1400 Watts

Total Power: 350 Watts
per module
Input Voltage: 90-264 VAC
of Outputs: Single and
standby

Special Features

- Active Power Factor Correction
- EN61000-3-2 compliant
- CISPR22, EN55022 Level-B
conducted/radiated EMI
- EN61000 immunity standards
- $5V_{sb}@2A$
- Overvoltage protection (OVP)
- Overcurrent protection (OCP)
- Overtemperature protection
(OTP)
- AC OK signal and indicator LED
- DC OK signal and indicator LED
- Remote Inhibit
- Remote Sense on main output
- Hot Plug
- N+1 Redundant
- 2 year warranty

Safety

- **UL** UL60950-1, 1st Ed.
(April 1, 2003)
- **CSA** CSA C22.2 60950-1-03
- **TUV** EN60950-1:2001
(1st Ed.)
- **CB** IEC60950-1,
1st Ed. (2001)
- **CE** Mark (LVD)



Rev. 3.4.09_133
HPS35 Series
1 of 4



Electrical Specifications

Input

Input voltage:	90-264 VAC typical
Frequency:	47-440 Hz
Inrush current:	40 A peak typical @ 25 °C
Efficiency:	80% typ @ full load, 230 VAC
Power factor:	0.98 typical @ 115 VAC, full load
Turn-on time:	AC ON -2 sec., Inhibit / Enable 160 ms
EMI filter standard:	CISPR 22, EN55022 Level "B"
Leakage current standard:	<0.5 mA max @ 230 VAC @ 60Hz (per module)
Radiated EMI:	CISPR 22, EN55022 Level "B"
Holdup time:	20 ms minimum (independent of input VAC)
AC OK:	5 ms early warning minimum before outputs lose regulation
Harmonic distortion:	Meets EN61000-3-2
Isolation:	Meets EN60950

Output

Adjustability:	±5% of nominal output voltage
Overall regulation:	±3%
Ripple:	1% of Vout pk - pk (20 MHz bandwidth)
Dynamic response:	4% from 25% to 75% load step
Recovery time:	To within 1% in <300 µsec
Overcurrent protection:	115 - 130% of rated output current
Short circuit protection:	Protected for continuous short circuit. Auto recovery.
Overvoltage protection:	120 - 140% AC Reset.
Reverse voltage protection:	100% of rated output voltage
Thermal protection:	Main and Aux disabled when internal temp exceeds safe operating range
Remote sense:	Up to 0.5 V total drop
Single wire parallel:	Current share to within 10% of total rated current on main output
DC OK:	±5% of nominal



Module Information


Rev.3.4.09_133
HPS35 Series
2 of 4

Environmental Specifications

Operating temperature:	0 ° to 50 °C ambient. Derate each output 2.5% per degree from 50 ° to 70 °C
Shock:	Operating: 4g, half sine, 22 ms minimum duration, all 6 faces Non-operating: 30g, half sine, 6 ms minimum duration, all 6 faces
Random Vibration:	Operating: 1g rms, 20 min/axis Non-operating: 2.5g rms, 20 min/axis
Humidity:	95% non-condensing
Storage Temperature:	-40 ° to +85 °C
Temperature coefficient:	0.04% per °C
Cooling	Internal DC fans

Ordering Information


HPS35L-NNR-000	12V
HPS35Q-NNR-000	24V
HPS35W-NNR-000	48V

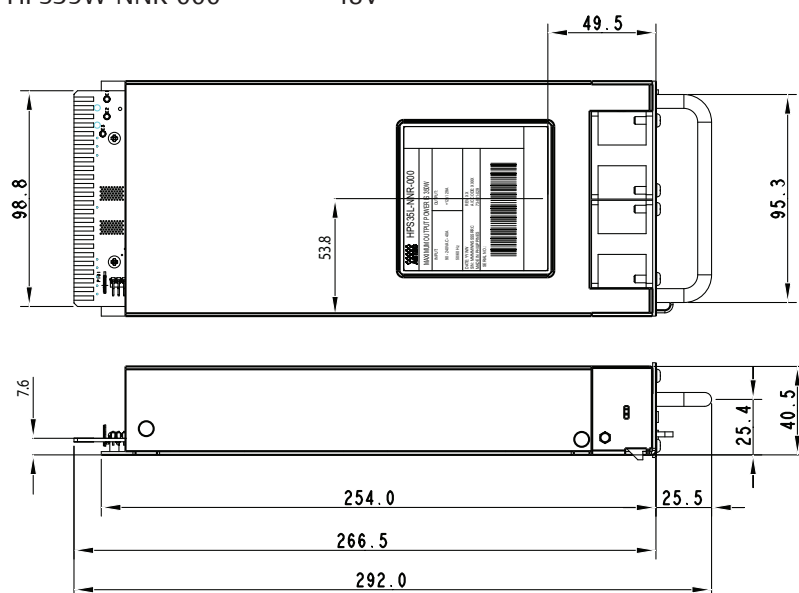

(All units in mm)

Modules

Watts	350	
Input Voltage	90-264	
Module ID	HPS35	
Code	Volt	Output Amps
L	12.0	29.2
Q	24.0	14.6
W	48.0	7.3
Max. Size (H x W x L)	1.6" x 4.3" x 10.5"	
Number per Rack	4	
Unit Weight (lbs)	3.2	



Pin Assignments

HPS35 Module

Top


Pin	Description	Pin	Description
1	AC (L)	13	COMMON
2	BLANK	14	V OUT
3	AC (N)	15	V OUT
4	BLANK	16	V OUT
5	GND	17	V OUT
6	SWP	18	V OUT
7	5V RTN	19	V OUT
8	COMMON	20	BLANK
9	COMMON	21	+5 STANDBY
10	COMMON	22	TBA
11	COMMON	23	FAN MON
12	COMMON	24	I ² C CLK

Bottom

Pin	Description	Pin	Description
A	AC (L)	P	COMMON
B	BLANK	R	V OUT
C	AC (N)	S	V OUT
D	BLANK	T	V OUT
E	GND	U	V OUT
F	-SENSE	V	V OUT
H	+SENSE	W	V OUT
J	COMMON	X	INHIBIT
K	COMMON	Y	TBA
L	COMMON	Z	AC OK
M	COMMON	AA	DC OK
N	COMMON	AB	I ² C DATA

Unit Connector

Card Edge Connector with gold fingers double-sided 1.6mm FR-4 PCB




Mating connector:
EDAC 307-048-520-201 or
equivalent

Rating: 5A per contact




Rack Information HPR1-00

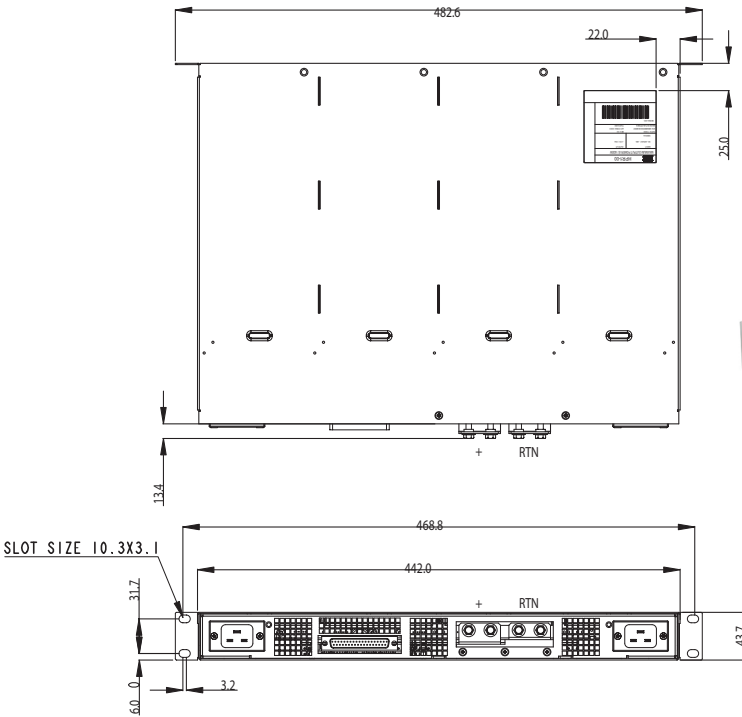

Racks

Watts	1400 (fully populated)
Input Voltage	90-264
Module ID	HPS35
Rack ID	HPR1-00
Max. Size (H x W x L)	1.75" x 19.0" x 13.0"
Module Distribution	(4 ea) HPS35
Standard Size	1U
Unit Weight (lbs)	8.6

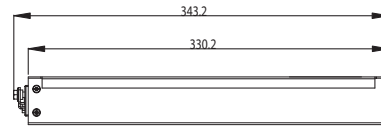

AC Cord: (North America)

For all other countries, please contact factory.

- 1) Quail Electronics Series 5050 or equivalent (15A/125V)
Supply End - NEMA 5-15P
Equipment End - IEC 60320-C19
- 2) Quail Electronics Series 5052 or equivalent (20A/125V)
Supply End - NEMA 5-20P
Equipment End - IEC60320-C19

Blank Panel:


Astec P/N 73-686-000

D-sub Connector Pin Outs

Pin	Description	Pin	Description
1	5V Return (std-by)	20	I2C CLOCK
2	+ Remote Sense	21	I2C DATA
3	- Remote Sense	22	SWP
4	5V Stand by	23	Unused (I2C_INT)
5	Unused	24	Module Inhibit
6	Module Inhibit	25	DC OK
7	DC OK	26	AC OK
8	AC OK	27	I2C_ADD#1
9	I2C_ADD#1	28	I2C_ADD#2
10	I2C_ADD#2	29	Fan Monitor
11	Fan Monitor	30	Unused
12	Global AC OK	31	Module Inhibit
13	Module Inhibit	32	DC OK
14	DC OK	33	AC OK
15	AC OK	34	I2C_ADD#1
16	I2C_ADD#1	35	I2C_ADD#2
17	I2C_ADD#2	36	Fan Monitor
18	Fan Monitor	37	Unused
19	Global Inhibit		

PSU Connector


617-A-037-P-AJ-1-21 (Male socket) Amphenol



Pin Out Diagram D-sub Connector (male)

Mating Connector

617-A-037-S-AJ-1-20 (Female socket) Amphenol




Pin Out Diagram D-sub Connector (female)

D. Sub Connector Additional Notes


Pin 2 + Remote Sense
Pin 3 - Remote Sense
Compensates for up to 0.5V drop.
Recommended shielded twisted wire pair.

Pin 12 - Global AC OK (OUT signal)




Note: AC OK signals are OR'ed together internally. If any module fails, the LED on the affected module will be off and the logic signal will indicate AC NOT OK.

Pin 19 - Global Inhibit (IN signal)




Note: All outputs disabled when Pin 19 is open or High.

Pin 22 - SWP (IN/OUT signal)




Note: SWP Voltage is 5V at 100% load current.

Module Inhibit (IN Signal)




Note: Module Inhibit signals for each slot in the rack is accessible in the D-sub connector (J18). Refer to Connector Pin-out table for pin assignments. Pin 1 is the Return Pin.

DC OK (OUT Signal)



Note: DC OK signals for each slot in the rack is accessible in the D-sub connector (J18). Refer to Connector Pin-out table for pin assignments. Pin 1 is the Return Pin.


AC OK (OUT Signal)



Note: AC OK signals for each slot in the rack is accessible in the D-sub connector (J18). Refer to Connector Pin-out table for pin assignments. Pin 1 is the Return Pin.

Hi state: Source 100uA @ 4V
Low State: Sink 10mA @ 0.5V

Fan Monitor (OUT Signal)



Note: Fan Monitor signals for each slot in the rack is accessible in the D-sub connector (J18). Refer to Connector Pin-out table for pin assignments. Pin 1 is the Return Pin.

I2C_ADD#1
I2C_ADD#2
TBD

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.PowerConversion.com
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2008 Emerson Electric Co.