

# HRLF29N045H

## 45V N-Channel Trench MOSFET

### Features

- Optimized for High Speed Switching, Logic Level
- Enhanced Body diode dv/dt capability
- Enhanced Avalanche Ruggedness
- 100% UIS Tested, 100% Rg Tested
- Lead free, Halogen Free


### Application

- Synchronous Rectification in SMPS
- Hard Switching and High Speed Circuit
- Power Tools
- UPS, Motor Control

### Key Parameters

Parameter	Value	Unit
BV <sub>DSS</sub>	45	V
I <sub>D</sub>	140	A
R <sub>DS(on)</sub> , typ @10V	2.5	mΩ
R <sub>DS(on)</sub> , typ @4.5V	3.2	mΩ

### Package & Internal Circuit

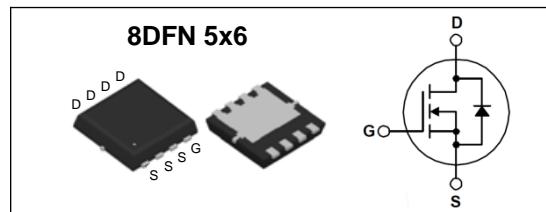

### Absolute Maximum Ratings

T<sub>J</sub>=25°C unless otherwise specified

Symbol	Parameter		Value	Units
V <sub>DSS</sub>	Drain-Source Voltage		45	V
V <sub>GS</sub>	Gate-Source Voltage		±20	V
I <sub>D</sub>	Drain Current	T <sub>C</sub> = 25°C	140	A
		T <sub>C</sub> = 100°C	89	A
I <sub>DM</sub>	Pulsed Drain Current		350	A
E <sub>AS</sub>	Single Pulsed Avalanche Energy L=1mH		100	mJ
P <sub>D</sub>	Power Dissipation	T <sub>C</sub> = 25°C	104	W
		T <sub>A</sub> = 25°C	2.0	W
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Temperature Range		-55 to +150	°C

### Thermal Resistance Characteristics

Symbol	Parameter	Typ.	Max.	Units
R <sub>θJC</sub>	Junction-to-Case	--	1.2	°C/W
R <sub>θJA</sub>	Junction-to-Ambient (steady state)	--	62	°C/W

**Electrical Characteristics**  $T_J=25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
--------	-----------	-----------------	-----	-----	-----	-------

**On Characteristics**

$V_{GS}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250 \mu\text{A}$	1.0	--	3.0	V
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS} = 10 \text{ V}, I_D = 20 \text{ A}$	--	2.5	2.9	$\text{m}\Omega$
		$V_{GS} = 4.5 \text{ V}, I_D = 20 \text{ A}$	--	3.2	4.0	$\text{m}\Omega$
$g_{FS}$	Forward Transconductance	$V_{DS} = 5 \text{ V}, I_D = 20 \text{ A}$	--	65	--	S

**Off Characteristics**

$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	45	--	--	V
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS} = 45 \text{ V}, V_{GS} = 0 \text{ V}$	--	--	1	$\mu\text{A}$
		$V_{DS} = 45 \text{ V}, T_J = 100^\circ\text{C}$	--	--	100	$\mu\text{A}$
$I_{GSS}$	Gate-Body Leakage Current	$V_{GS} = \pm 20 \text{ V}, V_{DS} = 0 \text{ V}$	--	--	$\pm 100$	nA

**Dynamic Characteristics**

$C_{iss}$	Input Capacitance	$V_{DS} = 20 \text{ V}, V_{GS} = 0 \text{ V}, f = 1.0 \text{ MHz}$	--	3322	--	pF
$C_{oss}$	Output Capacitance		--	1367	--	pF
$C_{rss}$	Reverse Transfer Capacitance		--	96	--	pF
$R_g$	Gate Resistance	$V_{GS} = 0 \text{ V}, V_{DS} = 0 \text{ V}, f = 1\text{MHz}$	--	1.6	--	$\Omega$


**Switching Characteristics**

$t_{d(on)}$	Turn-On Time	$V_{DS} = 20 \text{ V}, I_D = 20 \text{ A}, R_G = 10 \Omega$	--	14	--	ns
$t_r$	Turn-On Rise Time		--	12	--	ns
$t_{d(off)}$	Turn-Off Delay Time		--	57	--	ns
$t_f$	Turn-Off Fall Time		--	18	--	ns
$Q_g(10\text{V})$	Total Gate Charge	$V_{DS} = 20 \text{ V}, I_D = 20 \text{ A}, V_{GS} = 10 \text{ V}$	--	50	--	nC
$Q_g(4.5\text{V})$	Total Gate Charge		--	25	--	nC
$Q_{gs}$	Gate-Source Charge		--	8	--	nC
$Q_{gd}$	Gate-Drain Charge		--	9.5	--	nC


**Source-Drain Diode Maximum Ratings and Characteristics**

$I_S$	Continuous Source-Drain Diode Forward Current	--	--	140	A	
$I_{SM}$	Pulsed Source-Drain Diode Forward Current	--	--	350		
$V_{SD}$	Source-Drain Diode Forward Voltage	$I_S = 20 \text{ A}, V_{GS} = 0 \text{ V}$	--	0.9	1.2	V
$trr$	Reverse Recovery Time	$I_S = 20 \text{ A}, V_R = 20 \text{ V}$ $dI_F/dt = 200 \text{ A}/\mu\text{s}$	--	40	--	ns
$Qrr$	Reverse Recovery Charge		--	64	--	nC


## Typical Characteristics

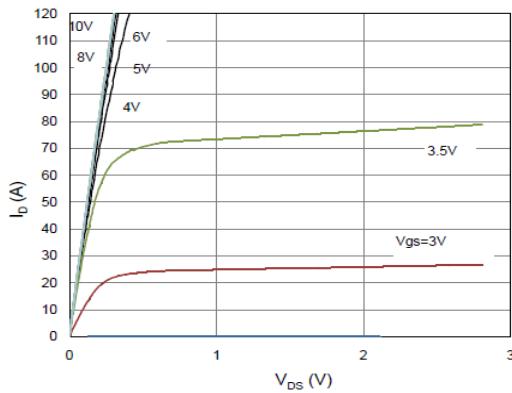


**Figure 1. On Region Characteristics**

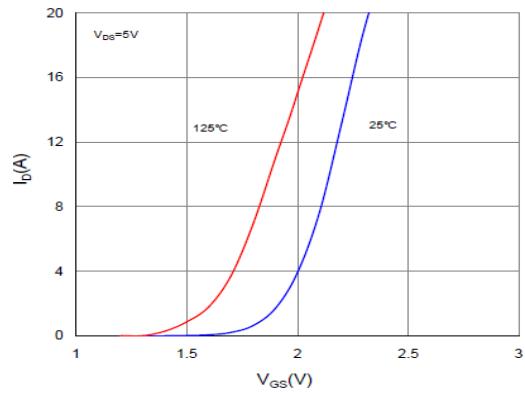


**Figure 2. Transfer Characteristics**

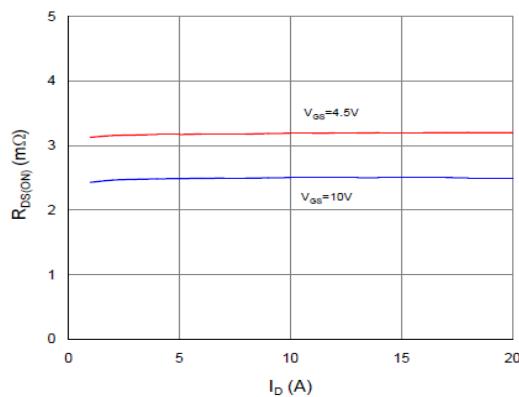


**Figure 3. On Resistance Variation vs Drain Current and Gate Voltage**

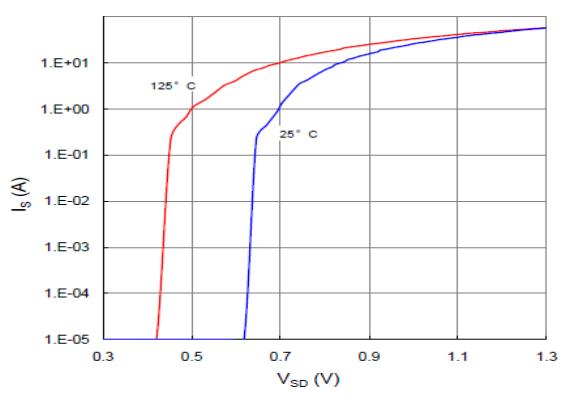

**Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature**

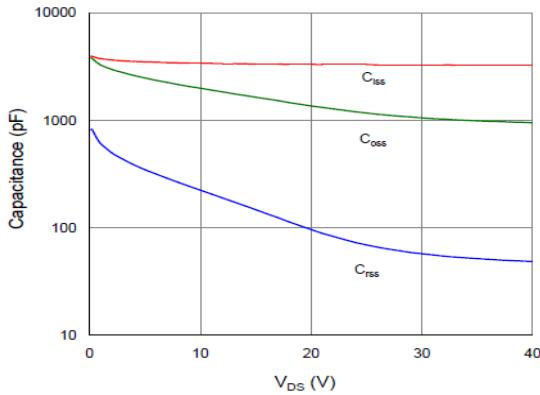


**Figure 5. Capacitance Characteristics**

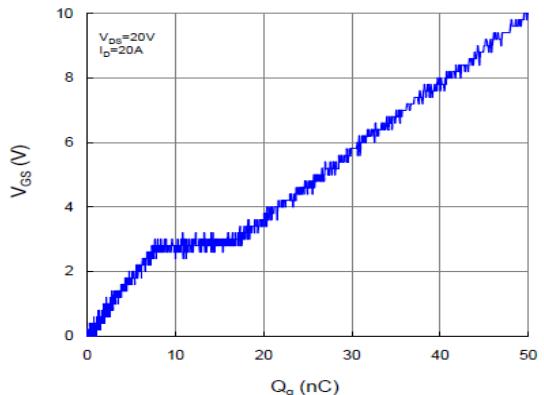


**Figure 6. Gate Charge Characteristics**


## Typical Characteristics (continued)

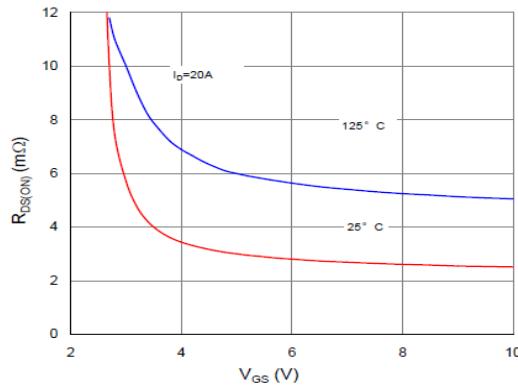


**Figure 7. On-Resistance Variation vs Gate-Source Voltage**

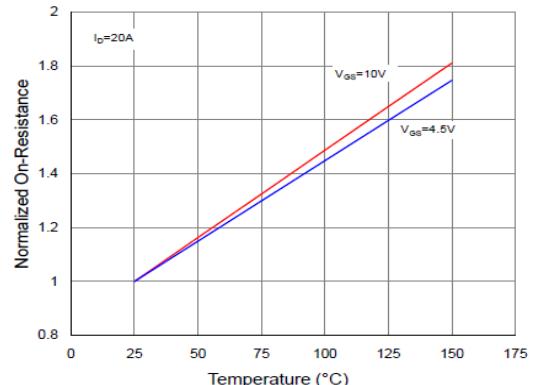


**Figure 8. On-Resistance Variation vs Temperature**

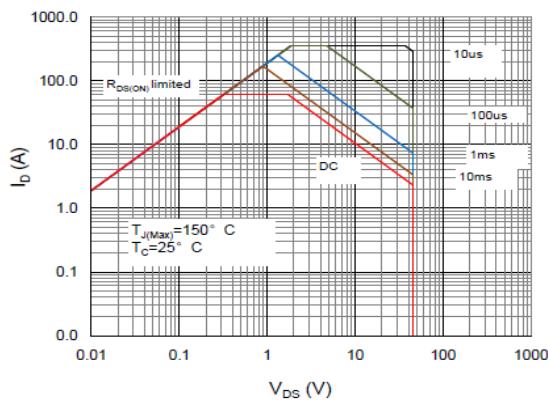

**Figure 9. Maximum Safe Operating Area**

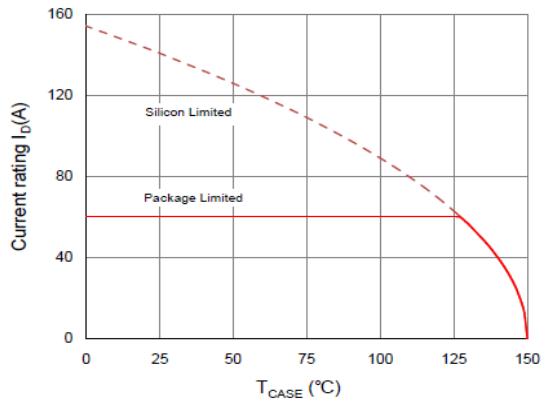

**Figure 10. Maximum Drain Current vs Case Temperature**

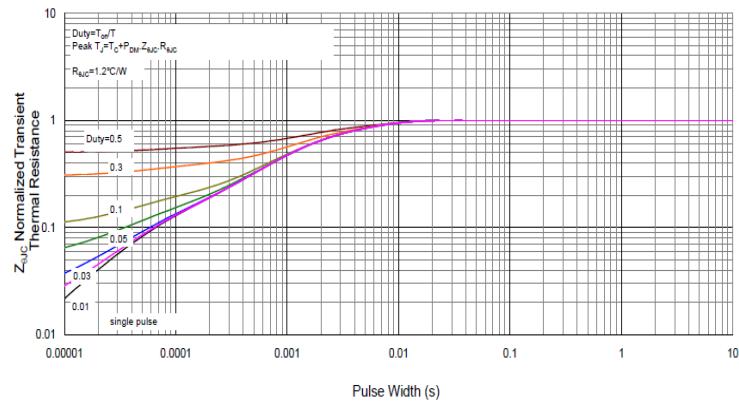

**Figure 11. Transient Thermal Response Curve**

Fig 12. Gate Charge Test Circuit &amp; Waveform

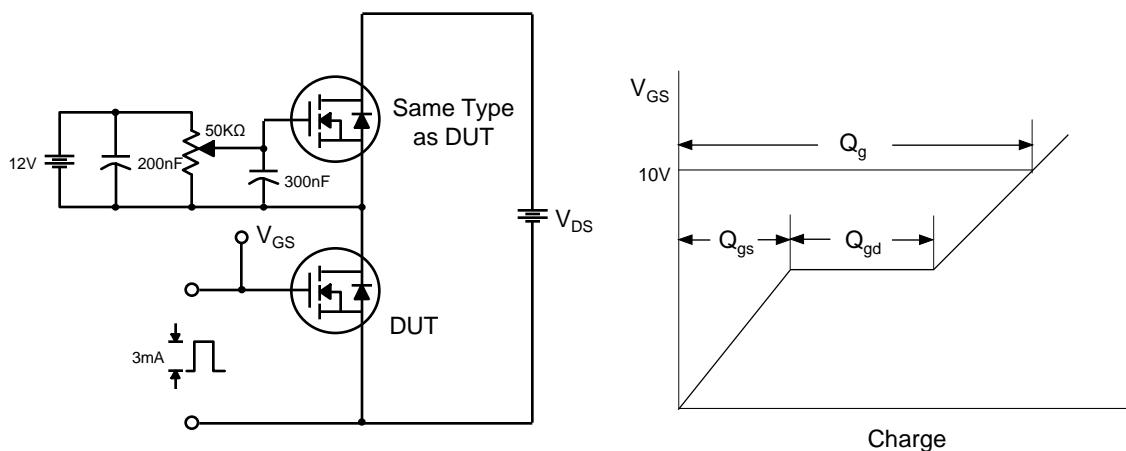


Fig 13. Resistive Switching Test Circuit &amp; Waveforms

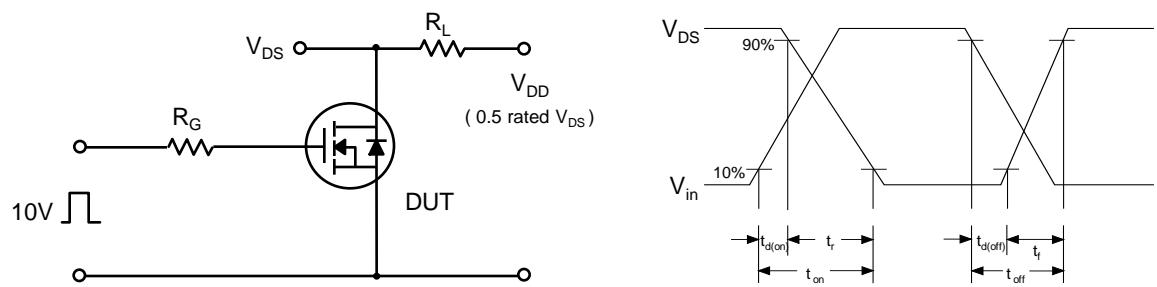


Fig 14. Unclamped Inductive Switching Test Circuit &amp; Waveforms






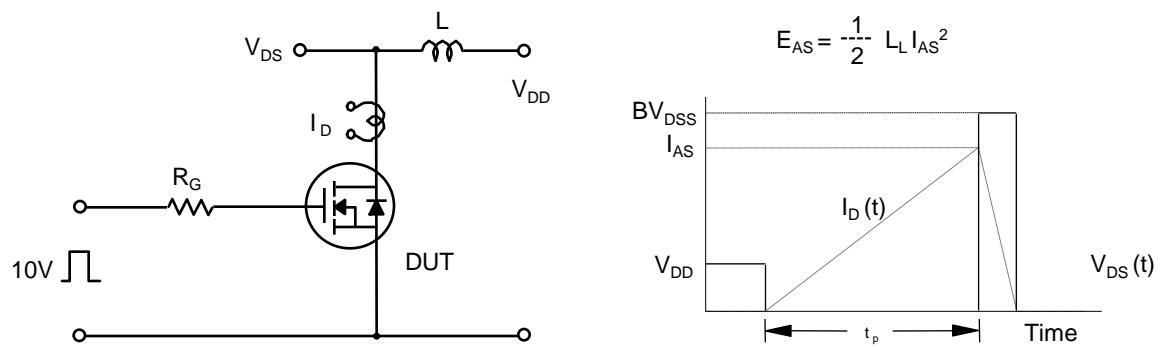


Fig 15. Peak Diode Recovery dv/dt Test Circuit &amp; Waveforms

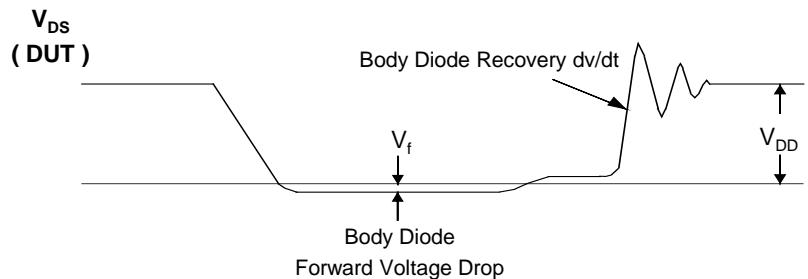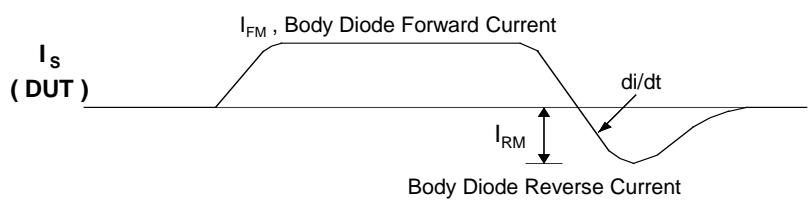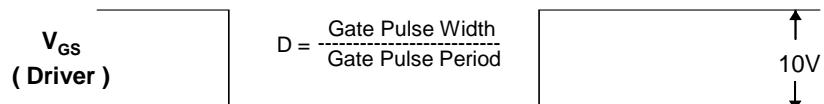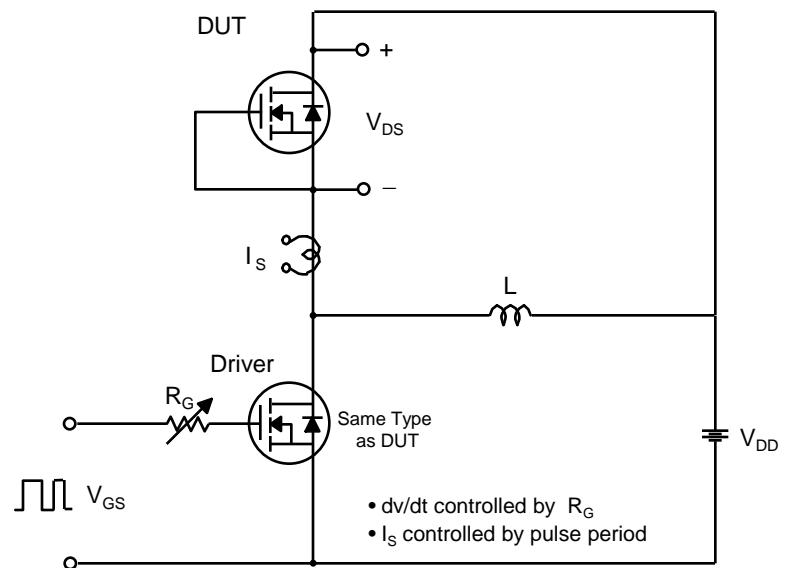

## Package Dimension

### 8DFN 5x6

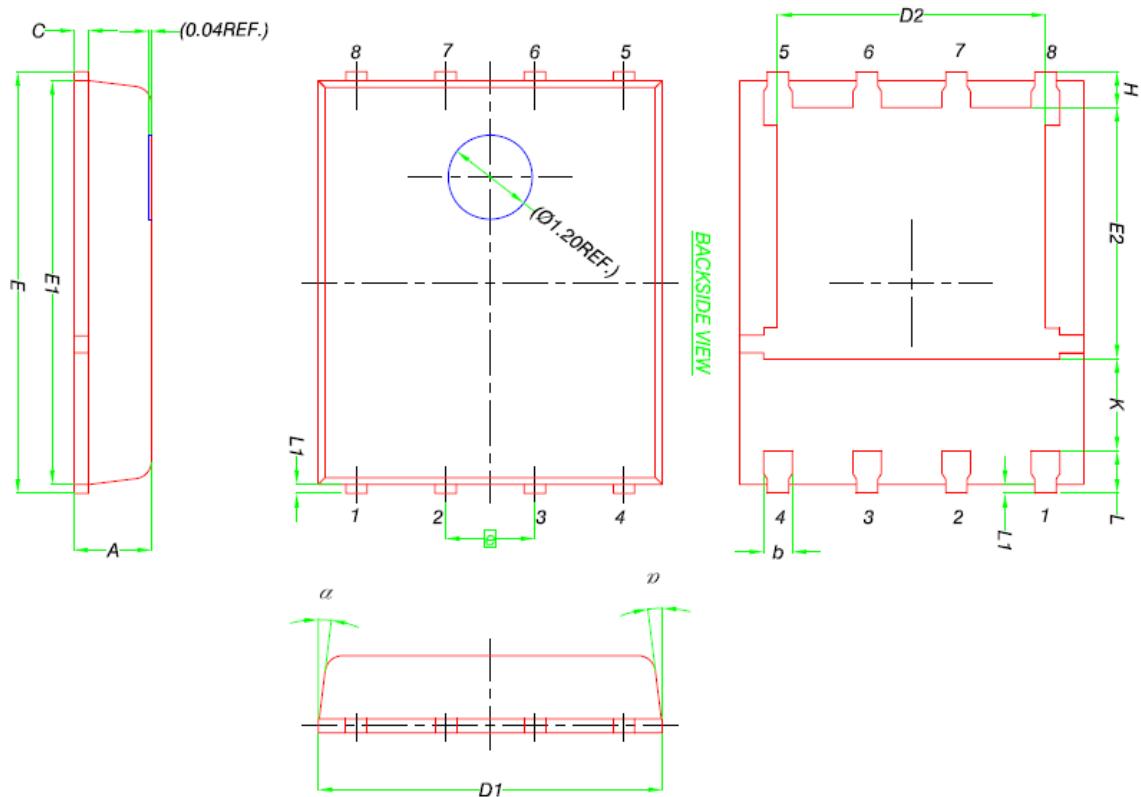

DIM.	MILLIMETERS		
	MIN.	NOM.	MAX.
A	0.90	1.00	1.10
b	0.33	0.41	0.51
C	0.20	0.25	0.30
D1	4.80	4.90	5.00
D2	3.61	3.81	3.96
E	5.90	6.00	6.10
E1	5.70	5.75	5.80
E2	3.38	3.58	3.78
<b>[e] 1.27 BSC</b>			
H	0.41	0.51	0.61
K	1.10	-	-
L	0.51	0.61	0.71
L1	0.06	0.13	0.20
α	0°	-	12°

