


REV.	CHANGE CONTENT	BY	DATE
	按样品修改尺寸和ICON	LZM	9.20
	按样品修改定位孔尺寸	zouys	9.28

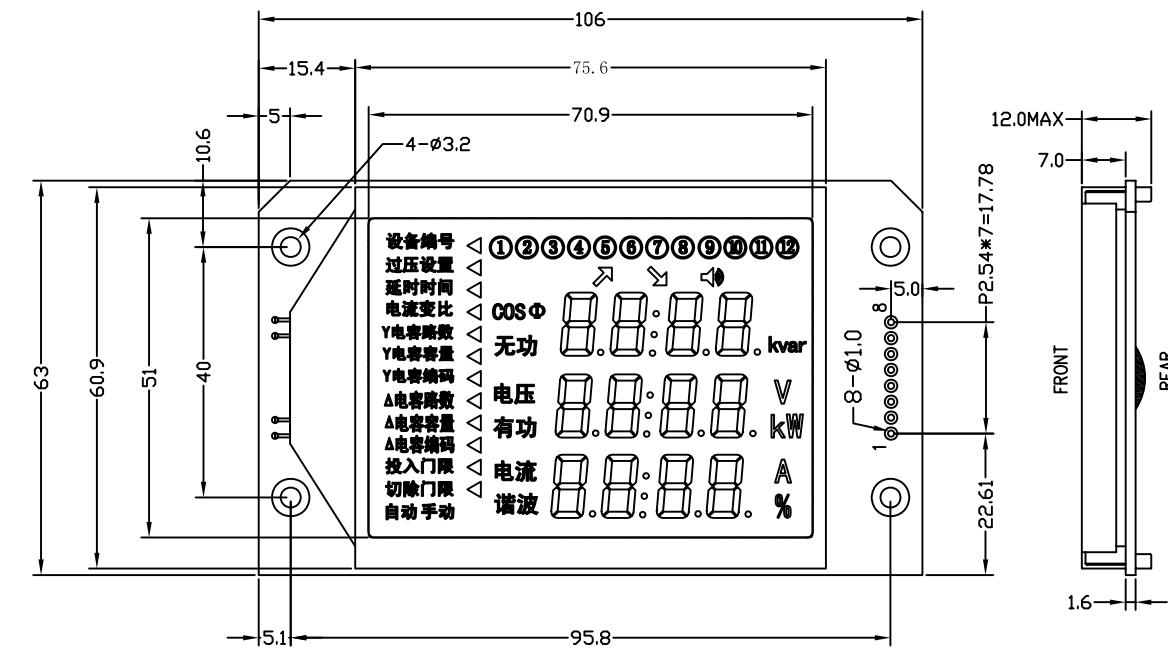

PIN	1	2	3	4	5	6	7	8
	VSS	VDD	VKD	DA	WR	CS	BLA	BLK

- Note:
1. Display Mode: TN, POSITIVE, TRANSFLECTIVE
 2. View Direction: 6 O' Clock
 3. Driver Method: 1/8 Duty, 1/4 Bias
 4. LCD Operating Voltage: 4.5V
 5. Operating Temperature: -20° C- 70° C
 6. Storage Temperature: -30° C- 80° C
 7. Controller: HT1622 COB
 8. LED: COLOR: WHITE

LED									
TK									
LCD									
PCB									
SYMBOL	ITEM OR CODE NO.	QT	REMARK	SYMBOL	ITEM OR CODE NO.	QT	REMARK		
TOLERANCE		HTDISPLAY CO., LTD.				DRAWING No.: HS0001C-NF62L-VA			
>0~6 ±0.10						DRAWING TITLE: LCD MODULE			
>6~80 ±0.20						REV.: A		SCALE: -	
>80~240 ±0.30						DESIGN	LZM	05.08.24	STANDARD
>240~400 ±0.50		CHECKED			TECHNOLOGY				
//⊥⊙ ±0.10		APPROVED			Q. A				
								UNIT: MM	
								SHEET: 1/1	