


REV.	CHANGE CONTENT	BY	DATE

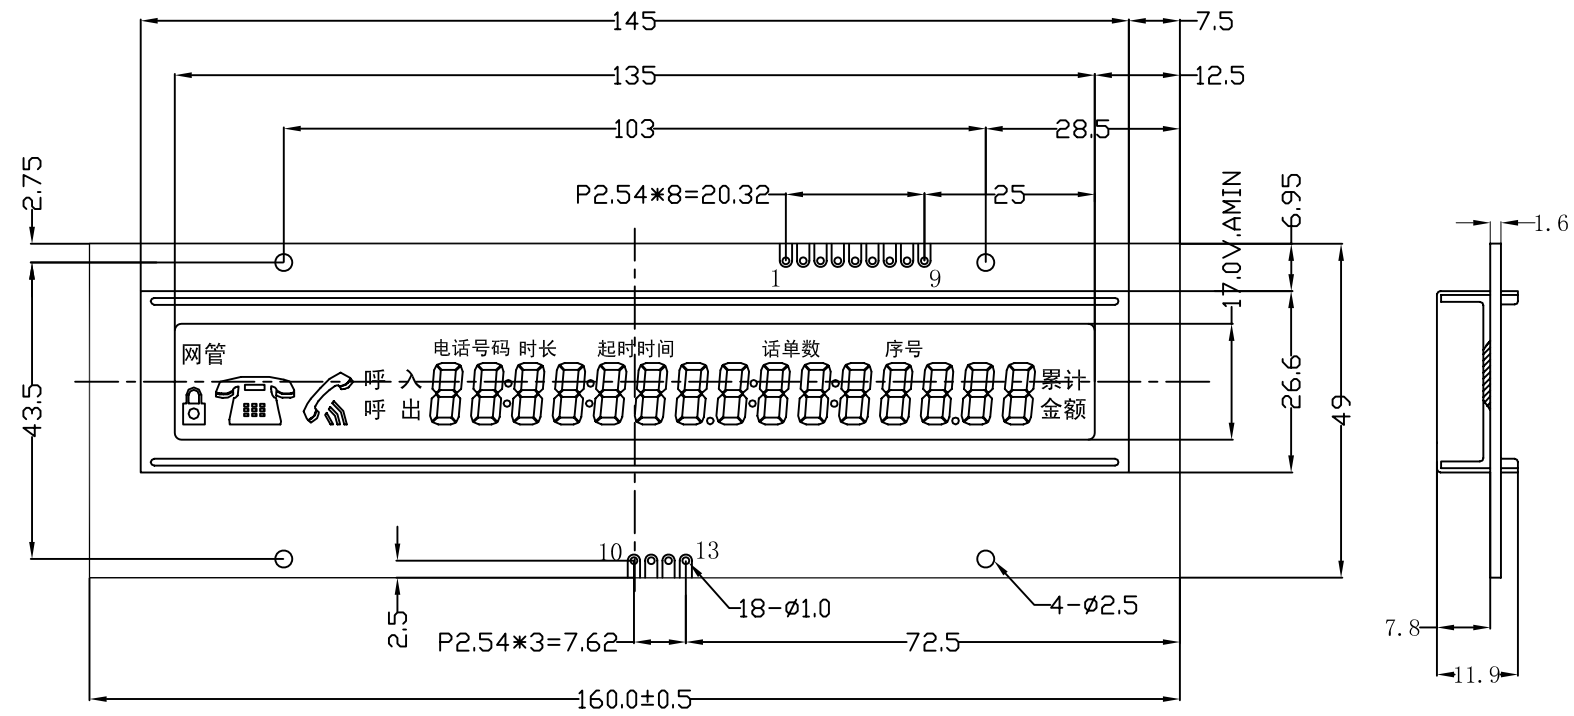

NO. PIN	1	2	3	4	5	6	7	8	9
SYMBOL	KEY1	KEY2	KEY3	KGND	GND	VCC	DATA	CLK	/CS
NO. PIN	10	11	12	13					
SYMBOL	KEY1	KEY2	KEY3	KGND					

NOTE:

DISPLAY TYPE : TN TRANSMISSIVE-POSITIVE

VIEWING DIRECTION : 6: 00

OPERATING VOLT. : VDD=5V;VOP=5V


OPERATING TEMP. : 0℃ ~ +50℃

STORAGE TEMP. : -10℃ ~ +60℃

DRIVE METHOD : 1/4 DUTY 1/3 BIAS

DRIVE IC : HT1621

LED : 琥珀色 1.9V

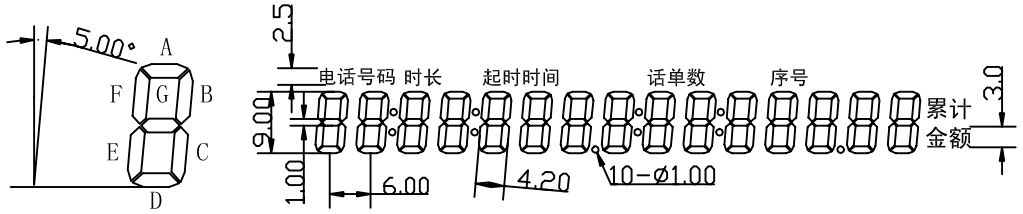

TOLERANCE	HTDISPLAY CO., LTD.				DRAWING No.: HS0019C-NT60L-VA	
>0~6 ±0.10					DRAWING TITLE: LCM	
>6~80 ±0.20	DESIGN	LZM	06.03.20	TECHNOLOGY	REV.: A	SCALE : -/-
>80~240 ±0.30	CHECKED			Q.A	PROJECTION:	UNIT : mm
>240~400 ±0.50	STANDARD			APPROVED		SHEET : 1/2
// ⊥ ◎ ±0.10						

