


240 Amp Schottky Rectifier

HS24515

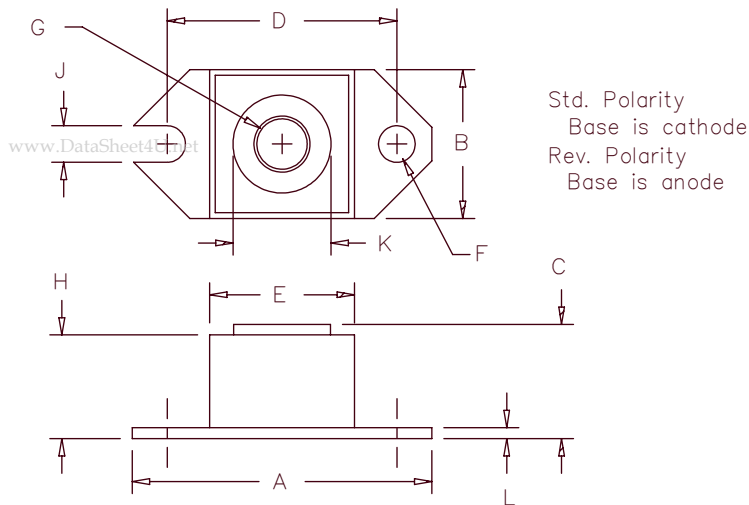

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.52	1.56	38.61	39.62	
B	.725	.775	18.42	19.69	
C	.605	.625	15.37	15.88	
D	1.182	1.192	30.02	30.28	
E	.745	.755	18.92	19.18	Sq.
F	.152	.160	3.86	4.06	Dia.
G		1/4-20	UNC-2B		
H	.525	.580	13.34	14.73	
J	.156	.160	3.96	4.06	
K	.495	.505	12.57	12.83	Dia.
L	.120	.130	3.05	3.30	

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
HS24515*	245NQ015	15V	15V

*Add Suffix R for Reverse Polarity

- Schottky Barrier Rectifier
- 0.28V V_f @240A, 100°C
- Optimized for OR'ing applications
- Guard Ring Reverse Protection
- 125°C Operation ($V_r < 5V$)
- ROHS Compliant

Electrical Characteristics

Average forward current	$I_F(AV)$ 240 Amps	$T_C = 78^\circ C, V_r = 5V$
Average forward current	$I_F(AV)$ 240 Amps	$T_C = 69^\circ C, V_r = 15V$
Maximum surge current	I_{FSM} 3500 Amps	8.3ms, half sine, $T_J = 125^\circ C$
Maximum repetitive reverse current	$I_{R(OV)}$ 2 Amps	$f = 1\text{ KHZ}, 25^\circ C, 1\mu s$ square wave
Max peak forward voltage	V_{FM} 0.37 Volts	$I_{FM} = 240A: T_J = 25^\circ C^*$
Max peak forward voltage	V_{FM} 0.30 Volts	$I_{FM} = 240A: T_J = 100^\circ C^*$
Max peak reverse current	I_{RM} 4000 mA	$V_R = 5V, T_J = 100^\circ C^*$
Max peak reverse current	I_{RM} 6500 mA	$V_{RRM}, T_J = 100^\circ C^*$
Max peak reverse current	I_{RM} 75mA	$V_R = 5V, T_J = 25^\circ C$
Max peak reverse current	R_M 150mA	$V_{RRM}, T_J = 25^\circ C$
Typical junction capacitance	C_J 21,700pF	$V_R = 5.0V, T_C = 25^\circ C$

*Pulse test: Pulse width 300μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 150°C
Operating junction temp range	T_J	-55°C to 125°C
Max thermal resistance	$R_{\theta JC}$	0.24°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.12°C/W Case to sink
Terminal Torque		35-40 inch pounds
Mounting Base Torque		20-25 inch pounds
Weight		1.1 ounces (32 grams) typical

HS24515

Figure 1
Typical Forward Characteristics

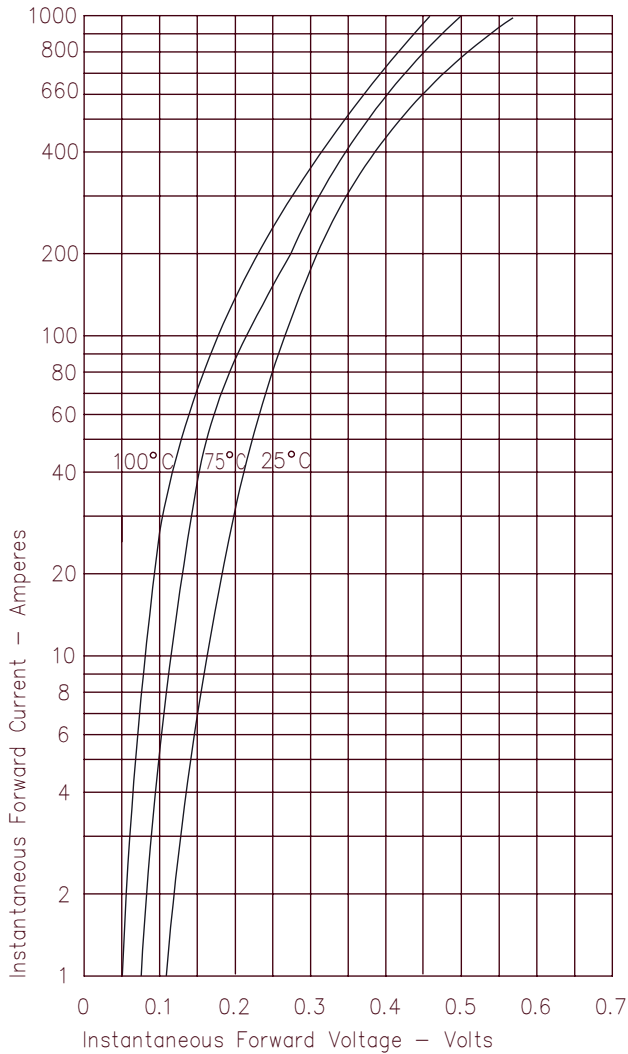


Figure 3
Typical Junction Capacitance

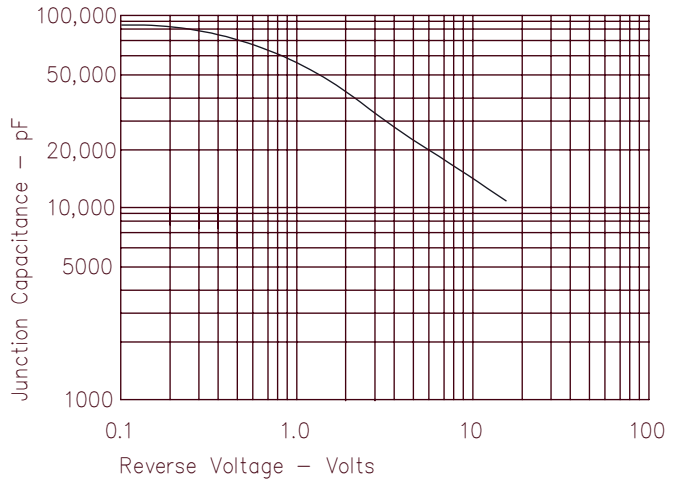


Figure 4
Forward Current Derating

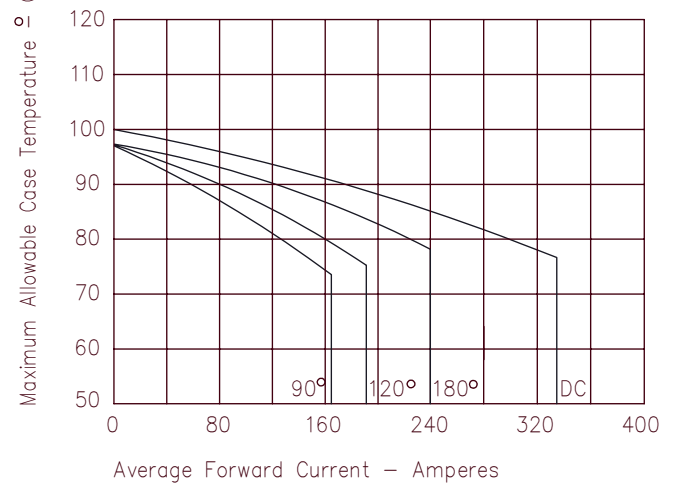


Figure 2
Typical Reverse Characteristics

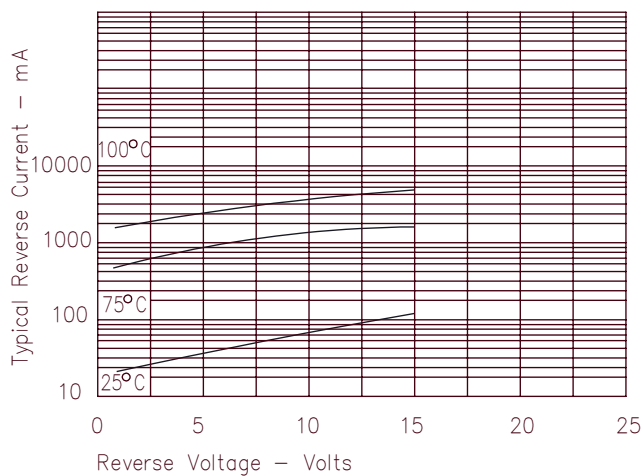


Figure 5
Maximum Forward Power Dissipation

