



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	1 / 35
Document No.		Revision	1.0

Hannstar Product Information

Model : HSD150SXA2
– A00

- Note:
1. Please contact HannStar Display Corp. before designing your product based on this module specification.
 2. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	2 / 35
Document No.		Revision	1.0

Record of Revisions

Rev.	Updated No.	Date	Description of change
1.0	—	—	HSD150SXA2-A product information was first issued.

The information contained in this document is the exclusive property of HannStar Display Corporation. It shall not be disclosed, distributed or reproduced in whole or in part without written permission of HannStar Display Corporation.



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	3 / 35
Document No.		Revision	1.0

Contents

1.0	General descriptions.....	p.4
2.0	Absolute maximum ratings.....	p.5
3.0	Optical characteristics.....	p.7
4.0	Block diagram.....	p.11
5.0	I/O Connection Pin assignment.....	p.14
6.0	Electrical Characteristics.....	p.16
7.0	Suggested Timing.....	p.27
8.0	Outline dimension.....	p.29
9.0	Lot Mark.....	p.31
10.0	Package Specification.....	p.32
11.0	General precaution.....	p.34



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	4 / 35
Document No.		Revision	1.0

1.0 GENERAL DESCRIPTIONS

1.1 Introduction

HannStar Display model **HSD150SXA2-A** is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, the voltage reference, common voltage, DC-DC converter, column, and row driver circuit. This TFT LCD has a 15-inch diagonally measured active display area with XGA resolution (768 vertical by 1024 horizontal pixel array).

1.2 Features

- 15" XGA TFT LCD panel
- 2 CCFLs Backlight system
- Supported XGA (V:768 lines, H:1024 pixels) resolution
- Supported to 75Hz refresh rate
- Compatible with PSWG standard
- Without LCD Timing Controller
- Compatible with RoHS standard

1.3 General information

Item		Specification	Unit
Outline dimension		326.5*253.5*10.6	mm
Display area		304.1(H) x 228.1(V) (15.0" diagonal)	mm
Number of Pixel		1024(H) x 768(V)	Pixels
Pixel pitch		0.297(H) x 0.297(V)	mm
Pixel arrangement		RGB Vertical stripe	
Display color		6-bits driver with RSDS interface	
Display mode		Normally white	
Surface treatment		Antiglare, Hard-Coating (3H)	
Weight		925(typ)	g
Back-light		2-CCFLs, Top & bottom edge side	
Input signal		Source and Gate Driver control signals	
Power consumption	Logic System	1.5(Typ)	W
	B/L System	11.2(Typ)	
Optimum viewing direction		6 o'clock	

1.4 Applications

- Desktop monitors
- Display terminals for AV applications
- Monitors for industrial applications



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	5 / 35
Document No.		Revision	1.0

1.5 Mechanical Information

Item		Min.	Typ.	Max.	Unit
Module Size	Horizontal(H)	326.0	326.5	327.0	mm
	Vertical(V)	253.0	253.5	254.0	mm
	Depth(D)		10.6	10.9	mm
Weight (without inverter)		--	925	975	g
Torque of customer screw hole				3.0	Kgf*Cm


2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Absolute Rating of Environment

Item	Symbol	Min.	Max.	Unit	Note
Storage temperature	T _{STG}	-20	60	°C	
Operating temperature	T _{OPR}	0	50	°C	
Vibration(non-operating)	V _{NOP}	--	1.5	G	(1)
Shock(non-operating)	S _{NOP}	--	70	G	(2)
Storage humidity	H _{STG}	10	90	%RH	(3)
Operating humidity	H _{OP}	10	80	%RH	(3)
Low pressure(operating)	P _{LOP}	697	--	HPa	(4)
Low pressure(non-operating)	P _{LNOP}	116	--	HPa	(5)

- Note
- (1) **5-500-5**Hz sine wave, X,Y,Z each directions, 30 min/cycle.
 - (2) 11ms, ±X, ±Y, ±Z direction, one time each. For this shock test, it is necessary to fill the silicon rubber between the shock jig as buffer.
 - (3) Max wet bulb temp. =39°C
 - (4) **2** hrs. (10000 feet)
 - (5) 24hrs. (50000 feet)

Document Title	HSD150SXA2- A Product Information	Page No.	6 / 35
Document No.		Revision	1.0

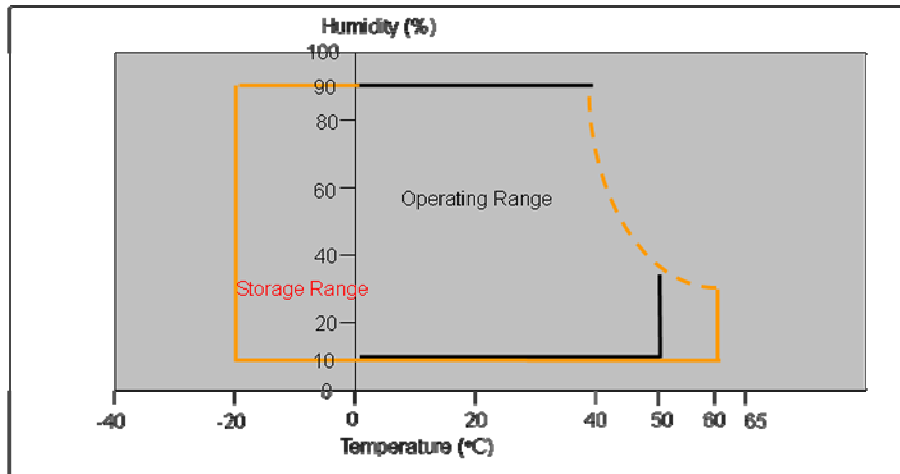

2.2 Electrical Absolute Rating:

2.2.1 TFT LCD Module:

Item	Symbol	Condition	Value		Unit
			min.	max.	
Input Power Voltage	V_{DD}	Normal	-0.3	+4.0	V(DC)
Logic Signal input voltage	V_{SIG}	Normal	-0.3	$V_{DD} + 0.3$	V

2.2.2 Back Light Unit:

Item	Symbol	Min.	Max.	Unit	Note
Lamp voltage	V_L	0	2000	V(rms)	(1)
Lamp current	I_L	—	9.0	mA	(1)
Lamp frequency	f_L	—	80	KHz	(1)

Note: (1) Permanent damage may occur to the LCD module if beyond this specification. Functional operation should be restricted to the conditions described under Normal Operating Conditions.



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	7 / 35
Document No.		Revision	1.0


3.0 OPTICAL CHARACTERISTICS

3.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast		CR	$\Theta = 0^{\circ}$ $\phi = 0^{\circ}$ Normal viewing angle --	400	500	--		(1)(2)
Response time	Rising	TR +TF			16	26	msec	(1)(3)
	Falling							
White luminance (center of screen)		Y_L		200	250		cd/m ²	(1)
Color chromaticity (CIE1931)	Red	R _x		0.604	0.634	0.664		(1)(4)
		R _y		0.309	0.339	0.369		
	Green	G _x		0.255	0.285	0.315		
		G _y		0.557	0.587	0.617		
	Blue	B _x		0.114	0.144	0.174		
		B _y		0.045	0.075	0.105		
	White	W _x	0.280	0.310	0.340			
		W _y	0.300	0.330	0.360			
Viewing angle	Hor.	Θ_L	CR>10	50	60			
		Θ_R		50	60			
	Ver.	Θ_H		35	45			
		Θ_L		45	55			
Brightness uniformity		B _{UNI}	$\Theta = 0^{\circ}$	75			%	(5)
Cross talk		CT(n)	$\phi = 0^{\circ}$			1.3	%	(6)

Document Title	HSD150SXA2- A Product Information	Page No.	8 / 35
Document No.		Revision	1.0


Note (1) Definition of Viewing Angle:

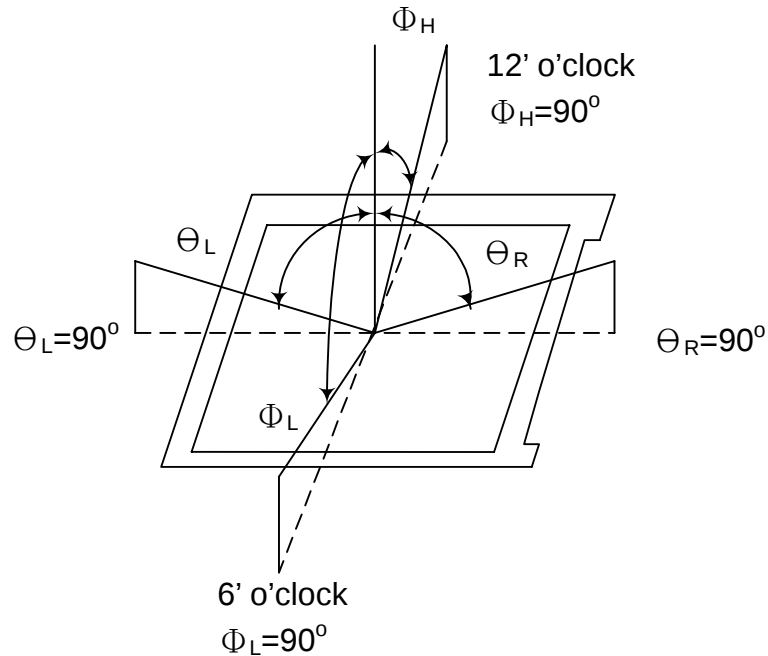


Note (2) Definition of Contrast Ratio(CR) :
measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white (L63)}}{\text{Luminance with all pixels black (L0)}}$$

Note (3) Definition of Response Time: Sum of T_R and T_F

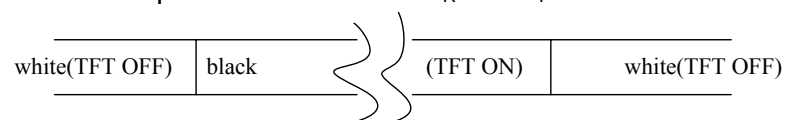


Optical
response

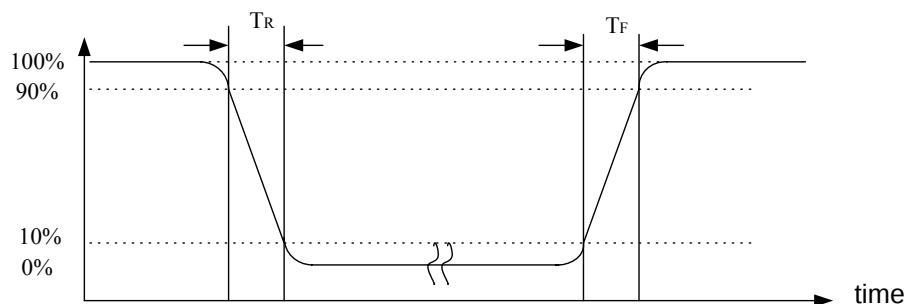


Document Title	HSD150SXA2- A Product Information	Page No.	9 / 35
Document No.		Revision	1.0

Note (4) Optical characteristic measurement setup

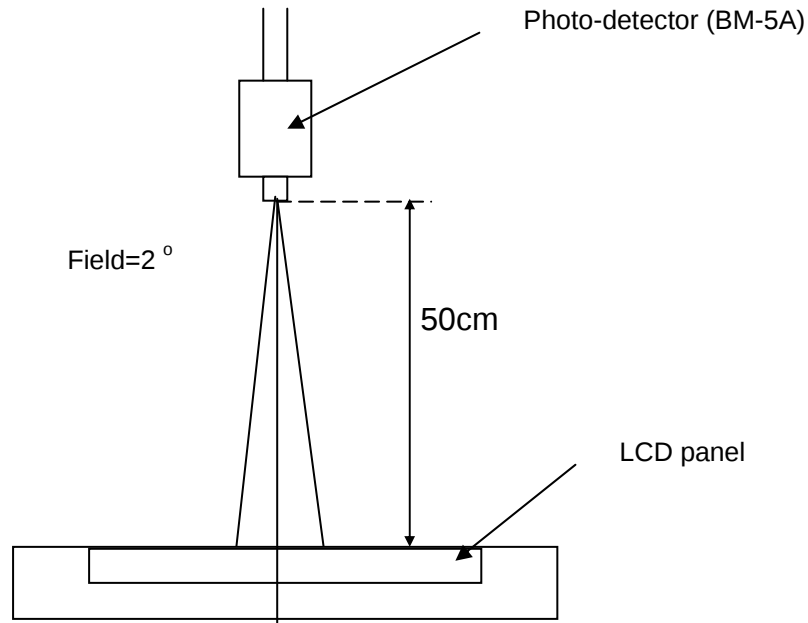

Note (5) Definition of brightness uniformity

$$\text{Luminance uniformity} = \frac{\text{Min Luminance of Y1~Y9}}{\text{Max Luminance of Y1~Y9}}$$

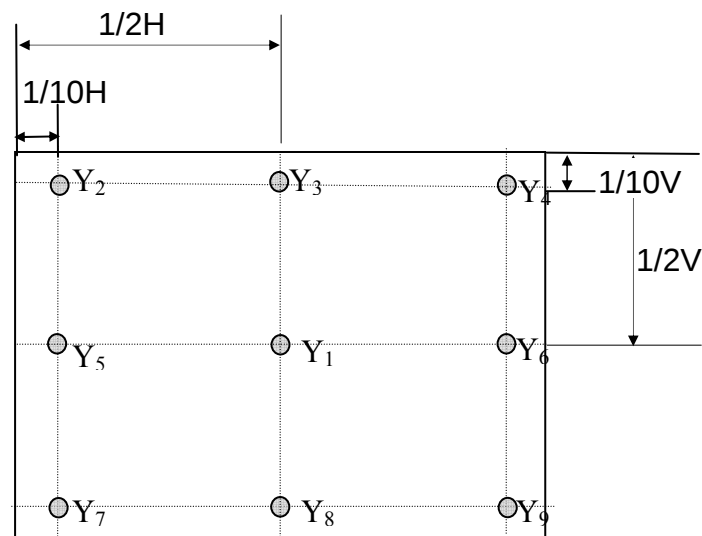

Document Title	HSD150SXA2- A Product Information	Page No.	10 / 35
Document No.		Revision	1.0

Note (6) Definition of crosstalk CT (1) ~ CT (4)

$$CT(n) = \frac{|L(n) - LB(n)|}{L(n)} \times 100\%, n = 1 \sim 4$$


Where $L(n)$ = Luminance of point "n" at pattern A (cd/m^2), $n=1 \sim 4$

$LB(n)$ = Luminance of point "n" at pattern B (cd/m^2), $n=1 \sim 4$

The location measured will be exactly the same in both patterns.

L0: Luminance with all pixels black

L63: Luminance with all pixels white

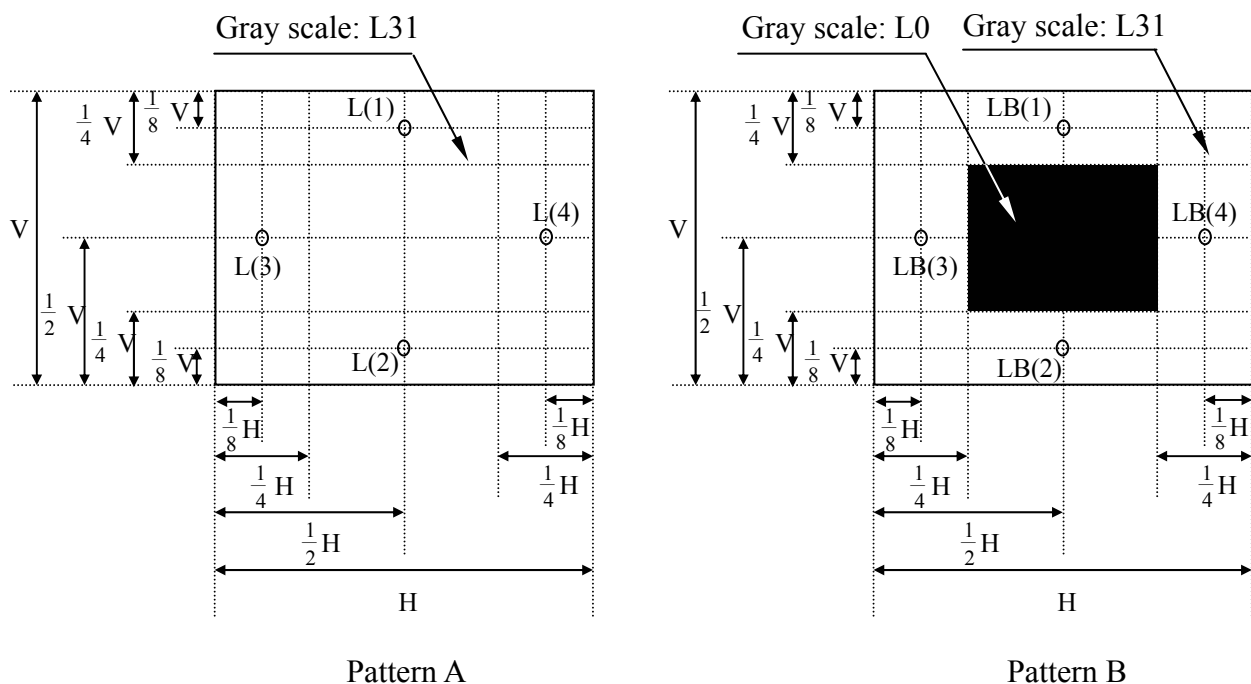

3.2 Measuring Condition

- Measuring surrounding : dark room
- Lamp current I_{BL} : $(8.0) \pm 0.1 \text{mA}$, lamp freq. $F_L = 52 \text{ KHz}$
- $V_{DD1} = 3.3\text{V}$, $f_V = 60\text{Hz}$, $f_{DCLK} = 32.5\text{MHz}$
- Surrounding temperature : $25 \pm 2^\circ\text{C}$
- 30min. Warm-up time.

3.3 Measuring Equipment

- LCD-7000 of Otsuka Electric Corp., which utilized MCPD-7000 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size : 10~12mm




HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	11 / 35
Document No.		Revision	1.0

4.0 BLOCK DIAGRAM

4.1 LCD Module Block Diagram:

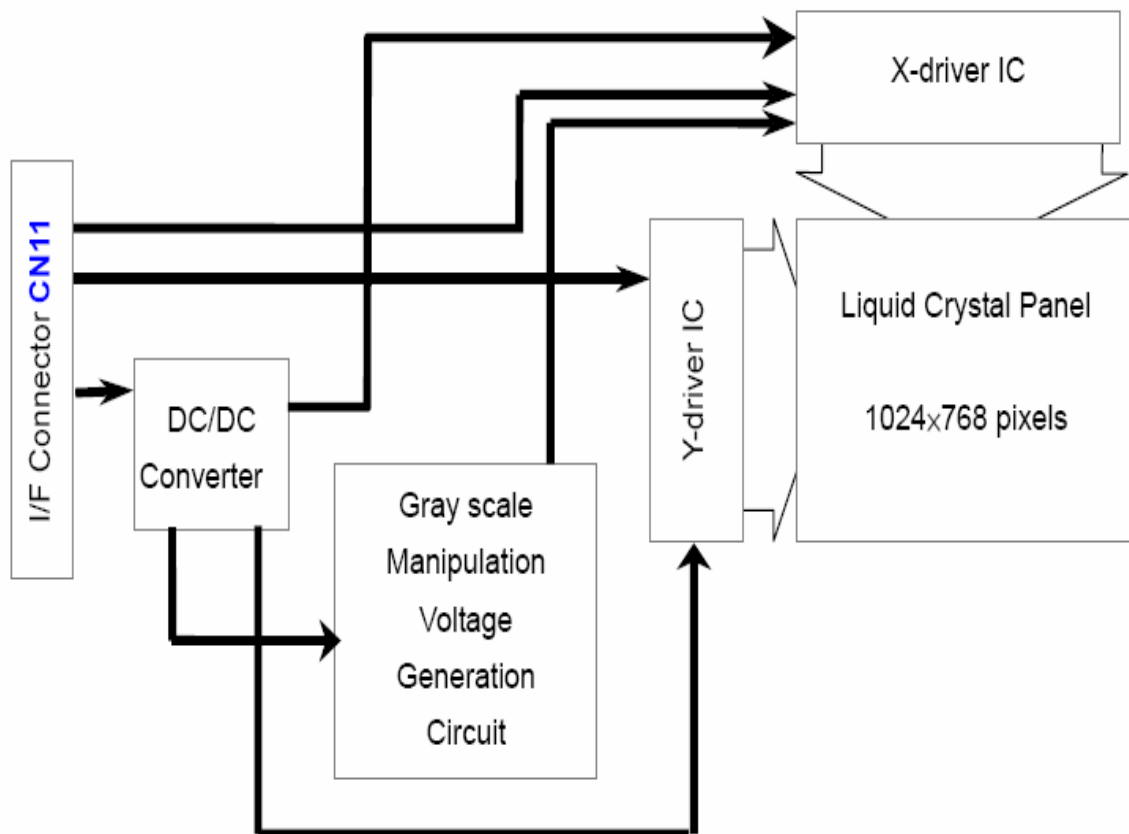




HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	12 / 35
Document No.		Revision	1.0

4.2 Pixel Format

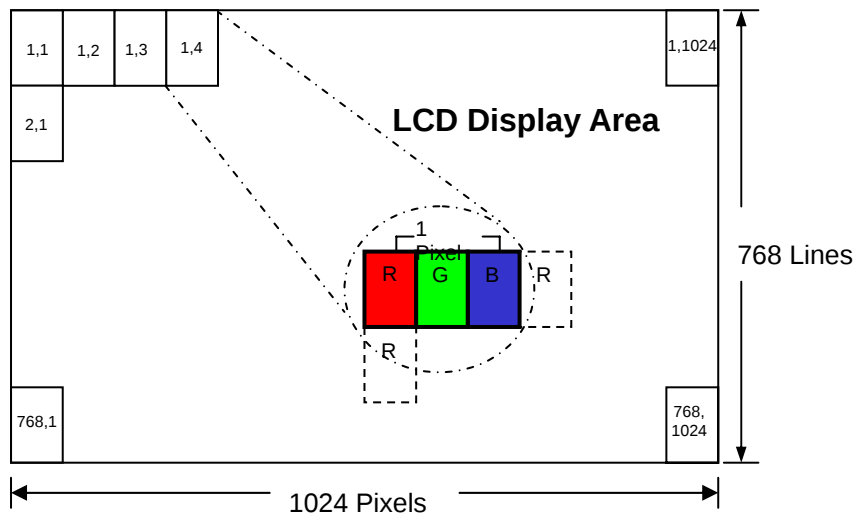



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	13 / 35
Document No.		Revision	1.0

4.3 Relationship between Displayed Color and Input Data

	Display	MSB R5 R4 R3 R2 R1 R0						LSB G5 G4 G3 G2 G1 G0						MSB B5 B4 B3 B2 B1 B0						Gray scale level
Basic color	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	-
	Green	L	L	L	L	L	L	L	H	H	H	H	H	L	L	L	L	L	L	-
	Light Blue	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	-
	Red	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	-
	Purple	H	H	H	H	H	H	L	L	L	L	L	L	H	H	H	H	H	H	-
	Yellow	H	H	H	H	H	H	H	H	H	H	H	H	L	L	L	L	L	L	-
Gray scale of Red	White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-
	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L1
		L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
		:						:						:						L3...L60
		H	H	H	H	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L61
		H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L62
	Red	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	Red L63
Gray scale of Green	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L1
		L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L2
		:						:						:						L3...L60
		L	L	L	L	L	L	H	H	H	H	L	H	L	L	L	L	L	L	L61
		L	L	L	L	L	L	H	H	H	H	H	L	L	L	L	L	L	L	L62
	Green	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	Green L63
Gray scale of Blue	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L1
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L	L2
		:						:						:						L3...L60
		L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	L	H	L	L61
		L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	L	L	L62
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	Blue L63
Gray scale of White and Black	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	H	L	L	L	L	L	H	L	L	L	L	L	H	L1
		L	L	L	L	H	L	L	L	L	L	H	L	L	L	L	L	H	L	L2
		:						:						:						L3...L60
		H	H	H	H	L	H	H	H	H	L	H	H	H	H	H	L	H	L	L61
		H	H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	L	L	L62
	White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	White L63



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	14 / 35
Document No.		Revision	1.0

5.0 I/O CONNECTION PIN ASSIGNMENT

Pin assignment (AF7501-N2G1Z) 定義如下表


Pin No	Symbol	Function	Pin No	Symbol	Function
1	GND	Ground	26	R1P	RSDS Red Data +
2	B2P	RSDS Blue Data + (MSB)	27	R1N	RSDS Red Data -
3	B2N	RSDS Blue Data -	28	GND	Ground
4	GND	Ground	29	R0P	RSDS Red Data +
5	B1P	RSDS Blue Data +	30	R0N	RSDS Red Data -
6	B1N	RSDS Blue Data -	31	GND	Ground
7	GND	Ground	32	STH	Source Driver IC Start Pulse
8	B0P	RSDS Blue Data +	33	LOAD	Source Driver IC Latch Pulse
9	B0N	RSDS Blue Data -	34	POL	Source Driver IC M Signal
10	GND	Ground	35	INVH	Data Polarity Inverting pin
11	G2P	RSDS Green Data + (MSB)	36	GND	Ground
12	G2N	RSDS Green Data -	37	CLKV	
13	GND	Ground	38	STV	Shift Data pin
14	G1P	RSDS Green Data +	39	GOE	
15	G1N	RSDS Green Data -	40	NC	Vcom test pin
16	GND	Ground	41	GND	Ground
17	G0P	RSDS Green Data +	42	VDD	3.3V
18	G0N	RSDS Green Data -	43	VDD	3.3V
19	GND	Ground	44	VDD	3.3V
20	CLKP	Source Driver IC RSDS CLK +	45	GND	Ground
21	CLKN	Source Driver IC RSDS CLK -	46	NC	(Reserved)
22	GND	Ground	47	NC	(Reserved)
23	R2P	RSDS Red Data + (MSB)	48	ID0	Panel ID
24	R2N	RSDS Red Data -	49	ID1	Panel ID
25	GND	Ground	50	ID2	Panel ID

Note: NC pin should be open , Don't connect it to ground nor to other signal input



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	15 / 35
Document No.		Revision	1.0

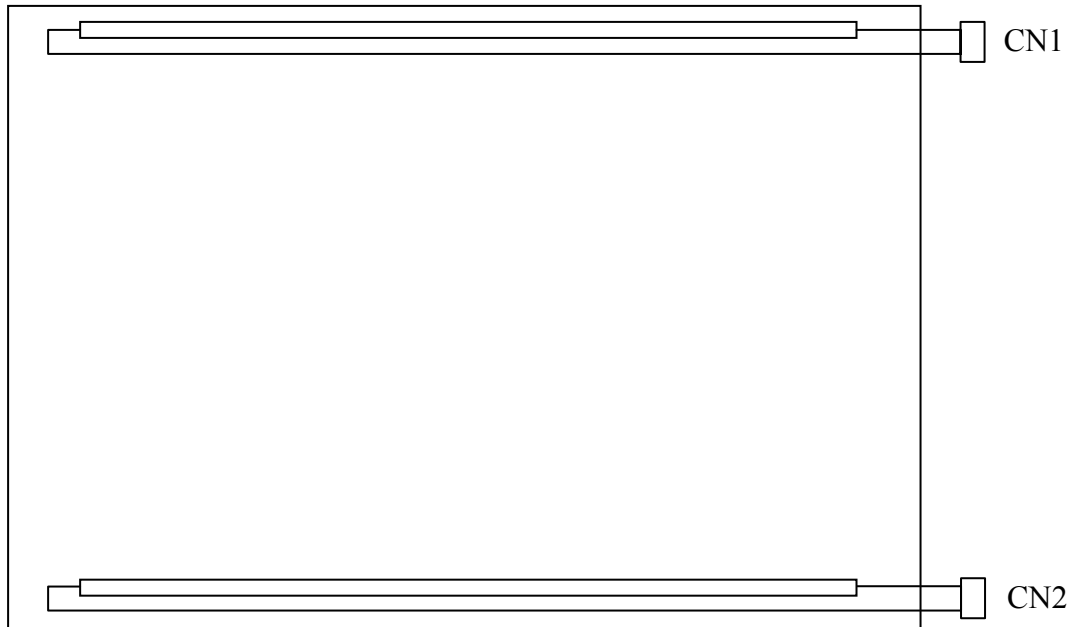5.1 Back Light Unit (CCFL) Connectors:**CN1, 2:** CCFL Power Source (BHR-03VS-1/Japan Solder less Terminal MFG Co., LTD)

Mating connector: SM02 (8.0)B-BHS-1/ Japan Solder less Terminal MFG Co., LTD

Terminal No.	Symbol	Function
1	VL	CCFL power supply (high voltage)Pink
2	NC ¹⁾	No connection
3	GL	CCFL power supply (low voltage)White

Note 1) Please connects NC pin to nothing. Don't connect it to ground nor to other signal Input. (NC pin should be open.)



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	16 / 35
Document No.		Revision	1.0


6.0 ELECTRICAL CHARACTERISTICS

6.1 Electrical System of LCD Module:

Item		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Input Voltage		V _{DD}	+3.0	+3.3	+3.6	V(DC)	
Input Rush Current		Inrush			1.5	A	VDD = +3.3V Each Iout = max.
Input Signal voltage		V _{IH}	3.0	3.3	3.6	V	High Level
		V _{IL}	0	—	0.9	V	Low Level
RSDS high input voltage		V _{IH} _{RSDS}	100	200	—	mV	V _{CM} _{RSDS} = +1.2V
RSDS high input voltage		V _{IL} _{RSDS}	—	-200	-100	mV	V _{CM} _{RSDS} = +1.2V
RSDS common mode input voltage range		V _{CM} _{RSDS}	1.0	—	1.4	V	V _{IH} _{RSDS} =+100mV V _{IL} _{RSDS} = -100mV
Current of power supply	V-Color	I _{DD1}	300	400	500	mA	(1)(3)
	Mosaic	I _{DD2}	325	425	525	mA	(1)(3)
Vsync frequency		f _V	-	60	75	Hz	(2)(3)
Hsync frequency		f _H	-	48.36	75	KHz	
Frequency		f _{DCLK}	-	65.00	80	MHz	


Note (1)

1). V-Color :

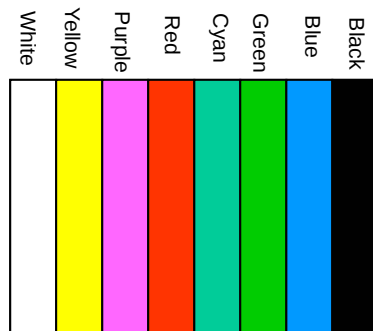


Document Title	HSD150SXA2- A Product Information	Page No.	17 / 35
Document No.		Revision	1.0

2). Mosaic : Dot checker image

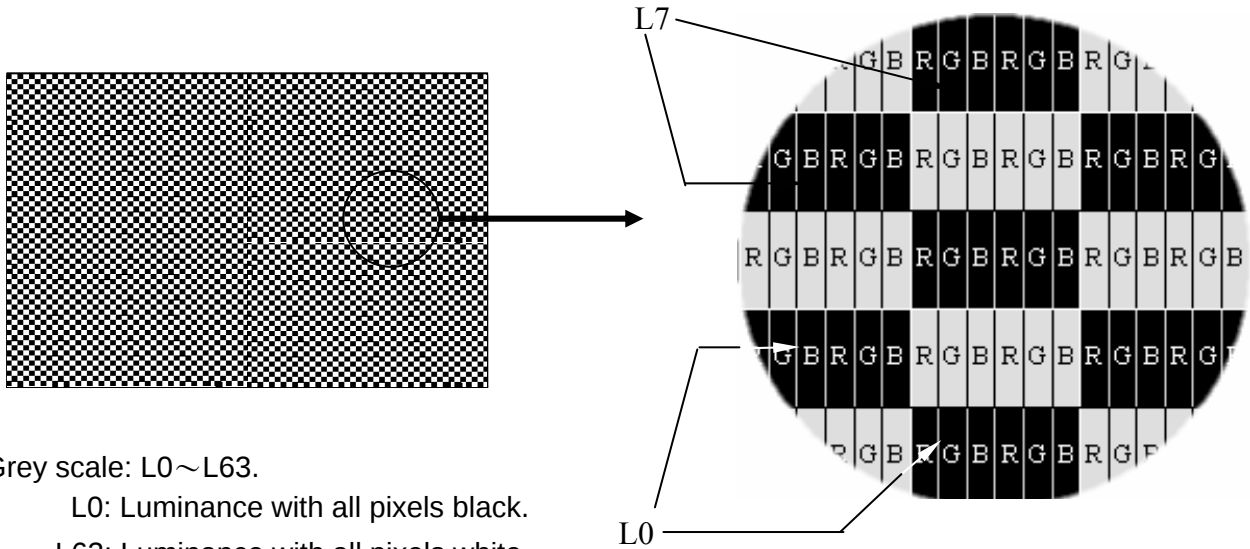Note (2) When f_v is too low, a flicker may be occurred on the display.

Note (3) Input Rush Current condition

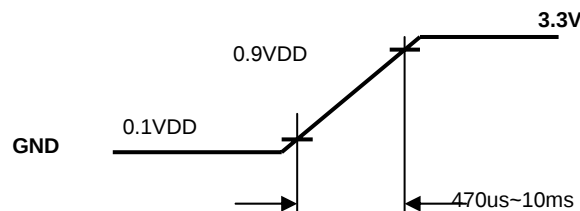**6.2 Back-Light Unit:**

The back-light system is an edge-lighting type with 2 CCFL(Cold Cathode Fluorescent Lamp).

The characteristics of the lamp is shown in the following tables.

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp current	IL	3.0	8.0	9.0	mA(rms)	(1)
Lamp voltage	VL	605	670	735	V(rms)	$I_L=8.0\text{mA}$
Frequency	fL	50	55	80	kHz	(2)
Operating lamp life time	Hr	30,000	--	--	Hour	(3)
Startup voltage	Vs	1140(25°C)	--	--	V(rms)	(4,5,6)
		1480(0°C)				




HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	18 / 35
Document No.		Revision	1.0

Note (1)

Lamp current is measured with current meter for high frequency as shown below. Specified values are for a single lamp.

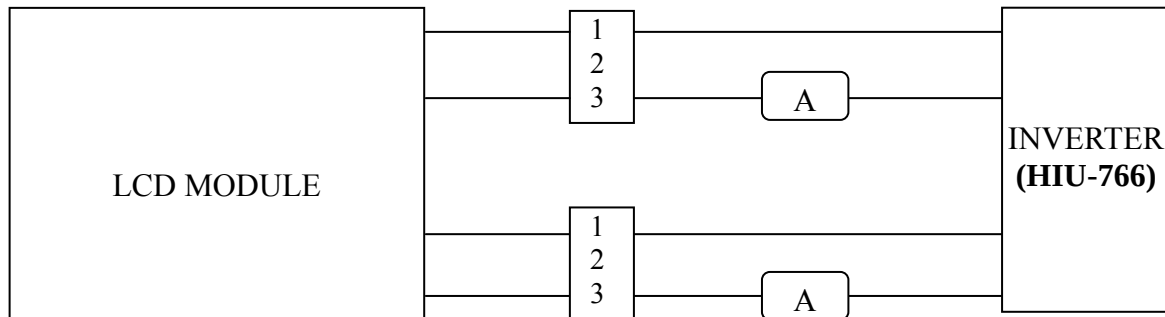**Note (2)**

Lamp frequency may produce interference with horizontal synchronous frequency and this may cause ripple noise on the display. Therefore lamp frequency shall be kept away from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

Note (3)

Lamp life time (Hr) can be defined as the time in which it continues to operate under the condition : $T_a = 25 \pm 3^\circ\text{C}$, Typical IL value indicated in the above table and $f_L = 52\text{kHz}$ until the brightness becomes less than 50%

Note (4)

CCFL inverter should be able to provide a voltage over specified value (V_s) in the above table. Lamp units need at least V_s value shown above to ignition.

Note (5)

The voltage over specified value (V_s) should be applied to the lamp more than 1 second after startup. Otherwise, the lamp may not be turned on. The used lamp current is the lamp typical current.


Note (6)

The output voltage waveform and current waveform of the inverter must be symmetrical (Unsymmetrical ratio is less than 10%). Please do not use the inverter which has unsymmetrical voltage and current waveform, and spike waveform. The inverter design which can provide the best optical performance, power efficiency, and lamp life should under the following conditions.

- The asymmetry rate of the inverter waveform should be less than 10%.
- The distortion rate of the waveform should be within $\sqrt{2} \pm 10\%$.
- The inverter output waveform should be better similar to the ideal sine wave.



Document Title	HSD150SXA2- A Product Information	Page No.	19 / 35
Document No.		Revision	1.0

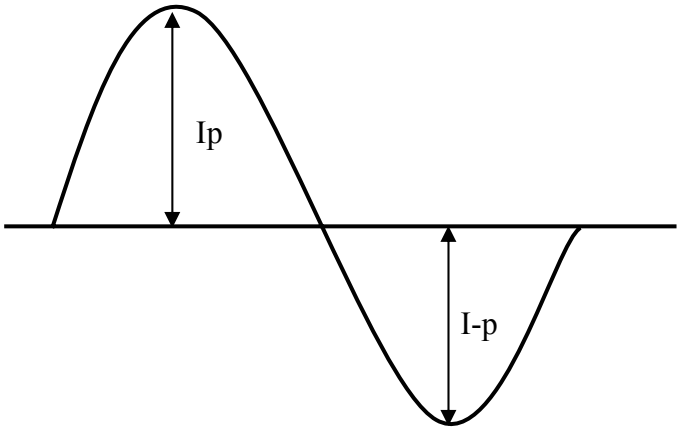

Asymmetry rate = $|I_p - I_{-p}| / I_{rms} \times 100\%$
Distortion rate = $I_p \text{ (or } I_{-p}) / I_{rms}$



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	20 / 35
Document No.		Revision	1.0

6.3 INTERFACE TIMING:

6.3.1 AC Timing: (VDD1=3.0V~3.6V, T_{OPR}=25 °C)⁵⁾

Item	Symbol	Min.	Typ.	Max.	Unit	Signals	Note
Reference Signal (Pixel Clock)	F1 T1=CLK	50 12.5	65 15.384	80 20	MHz n-Sec		
Reference Signal (DENB)	Line Periodic	T3=Line	1052	1344	1800	T1	
	Line Active	T4	1024	1024	1024	T1	
	Line Blank	T5	28	320	776	T1	
	Frame Periodic	T6	773	806	950	Lines	
	Frame Active	T7	768	768	768	Lines	
	Frame Blank	T8	5	---	---	Lines	
Vertical Periodic	Periodic	T6	773	806	950	Lines	
	Pulse Width	T9	1	1	---	Lines	
	Rising Time	T11	---	40	60	n-Sec	
	Falling Time	T12	---	40	60	n-Sec	
	Set-up Time	T13	700	800	---	n-Sec	
	Hold Time	T14	700	800	---	n-Sec	
Horizontal Periodic	Period	T15	---	1	---	Lines	
	Pulse Width	T16A	2.5		5	u-Sec	
		T16B	1			u-Sec	
		T16C	4	128	200	T1	
	Rising Time	T17A		40	60		
		T17B		40	60	n-Sec	
		T17C	2	4			
	Falling Time	T18A		40	60		
		T18B		40	60	n-Sec	
		T18C	2	4			



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	21 / 35
Document No.		Revision	1.0

Item	Symbol	Min.	Typ.	Max.	Unit	Signals	Note
Clock	Pulse width	T19 $V_{CC}=3.3V$	12	---	---	n-Sec	CLKP-CLK N
	Pulse low period	T19A	6	---	---	n-Sec	
	Pulse high period	T19B	6	---	---	n-Sec	
Start pulse	Data setup time	T20	4	---	---	n-Sec	STH
	Data hold time	T21	0	---	---	n-Sec	
	Setup time	T22	2	---	---	n-Sec	
	Hold time	T23	4	---	---	n-Sec	
	Signal pulse width	T24	1CLKP	---	---	n-Sec	
Load	Load high pulse width	T25	5CLKP	---	---	CLKP period	LOAD
	Load to STH setup time	T26	5CLKP	---	---	CLKP period	
	Last data time	T27	1CLKP	---	---	CLKP period	
	Load(rising)~CLKP(falling)	T28	4	---	---	n-Sec	
	POL(rising) or (falling) ~ Load(rising)	T29	14	---	---	n-Sec	
	Load(falling)~POL(rising)or (falling)	T30	10	---	---	n-Sec	

Note 1) Refer to VESA standard.

Note 2) Please adjust LCD operating signal timing and FL driving frequency, to optimize the display quality. There is a possibility that flicker is observed by the interference of LCD operating signal timing and FL driving condition (especially driving frequency).

Note 3) All the timing setting should be confirmed with Hannstar FAE persons.




HannStar Display Corp.


Document Title	HSD150SXA2- A Product Information	Page No.	22 / 35
Document No.		Revision	1.0

6.3.2 AC Timing Charts:

(1). Reference Signal (pixel clock):



(2). Vertical Periodic (STV, OE, CPV):

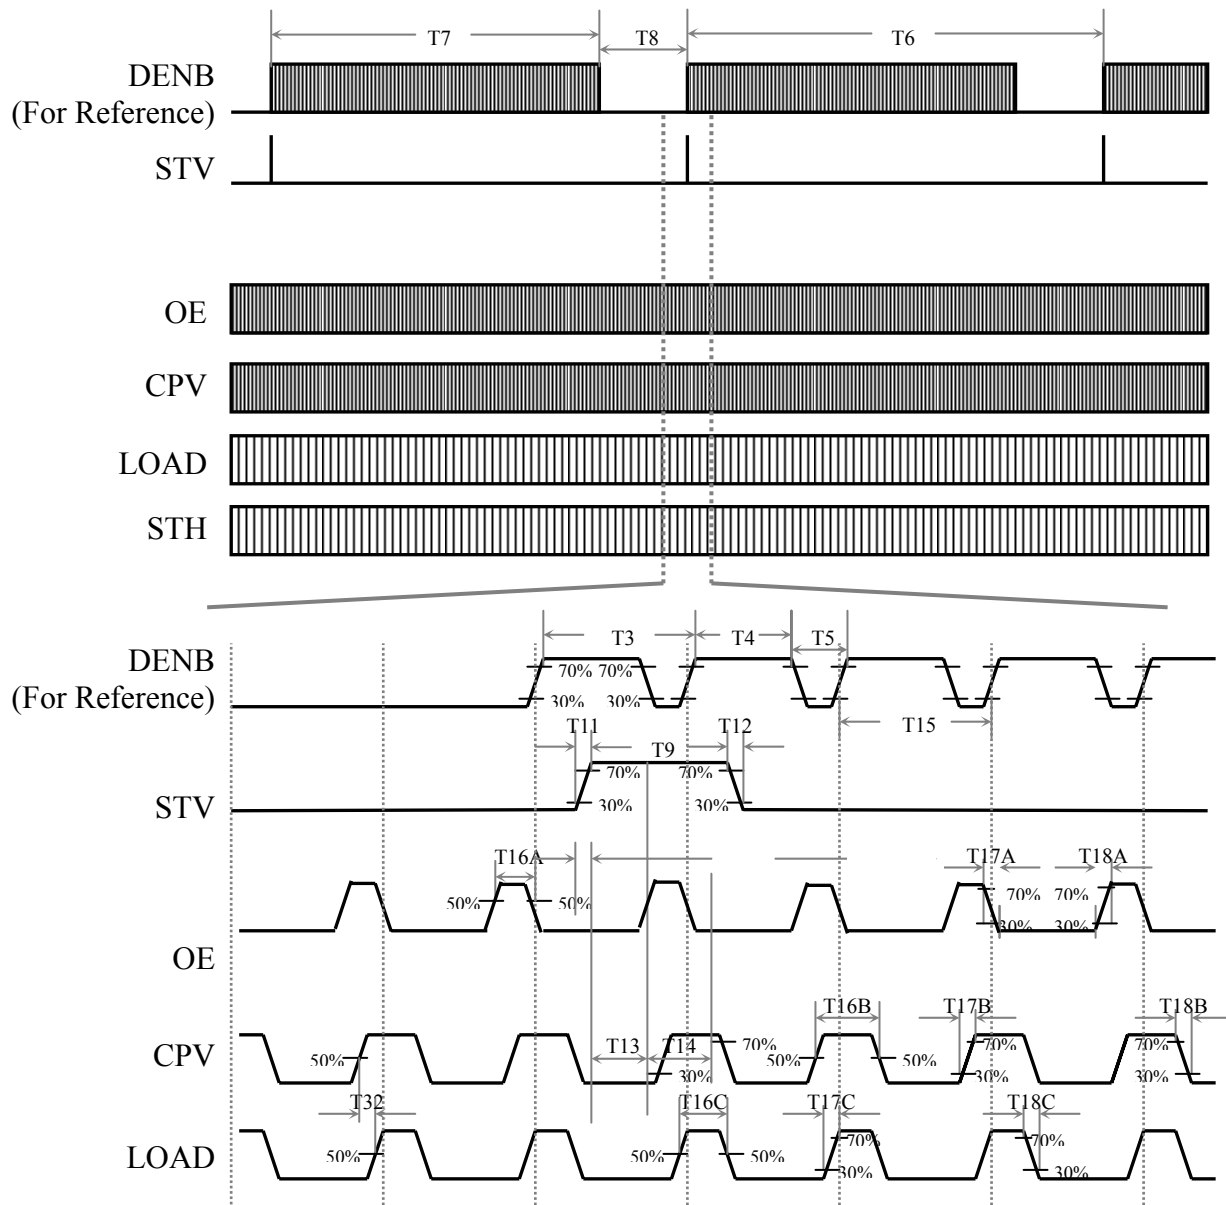




HannStar Display Corp.


Document Title	HSD150SXA2- A Product Information	Page No.	23 / 35
Document No.		Revision	1.0

(3). Horizontal Periodic 1 (STH, CLK, DATA):

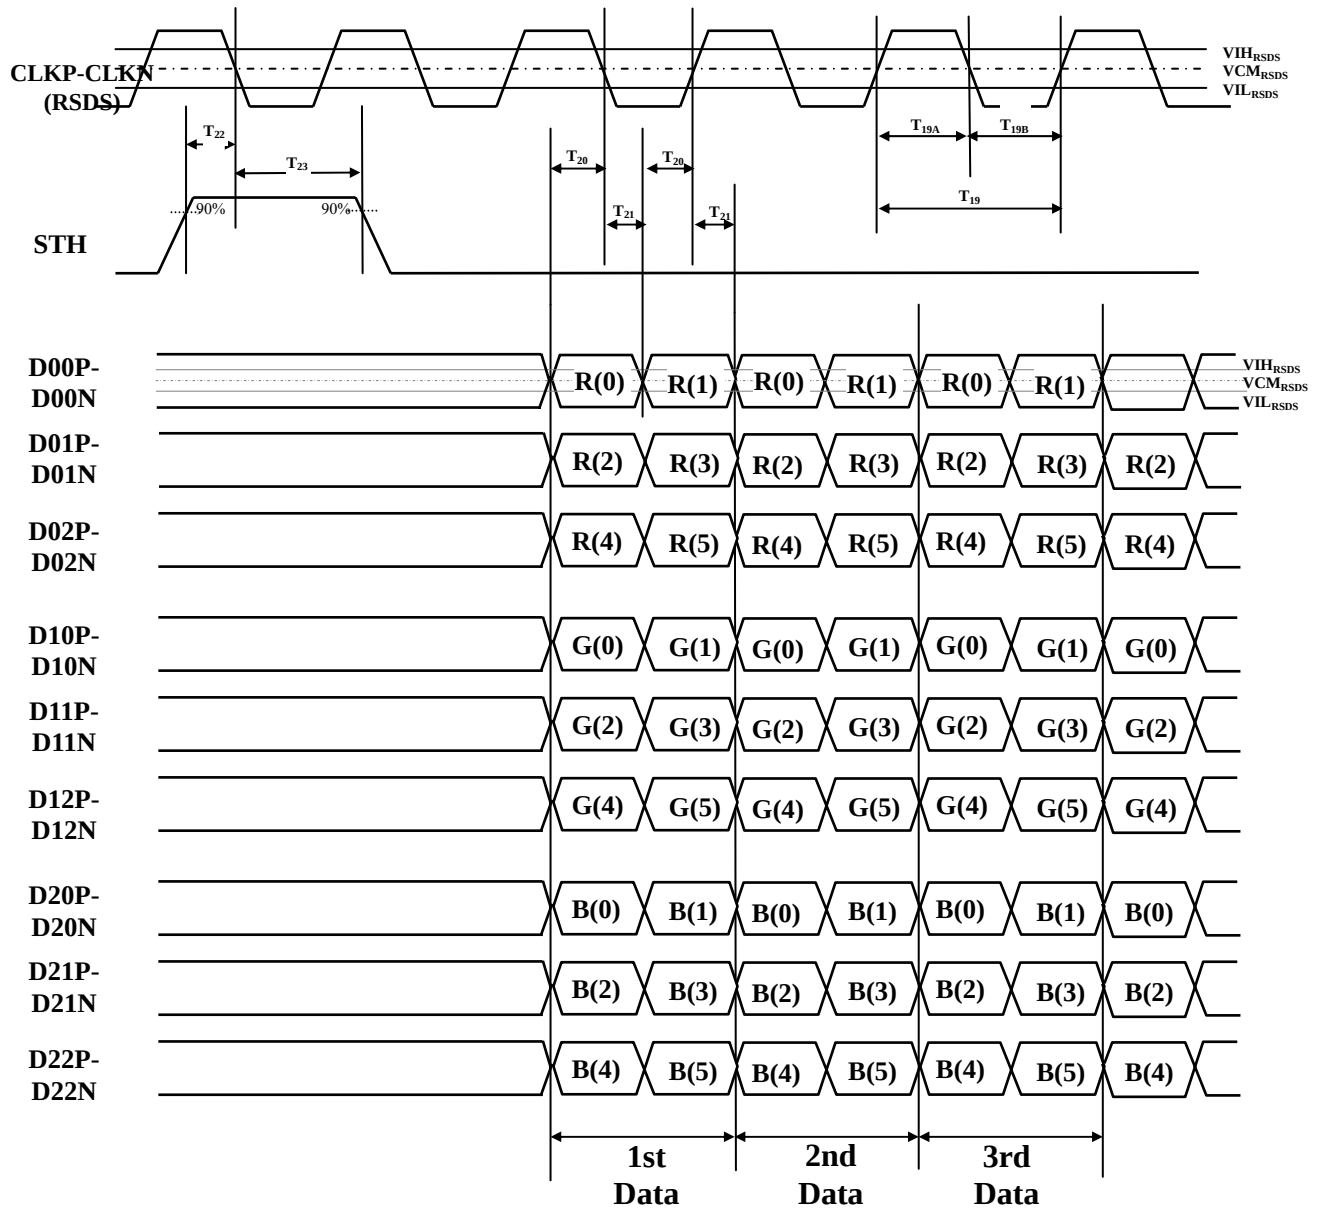


Document Title	HSD150SXA2- A Product Information	Page No.	24 / 35
Document No.		Revision	1.0

(4). Horizontal Periodic 2 (CLK, LOAD, STH, POL):

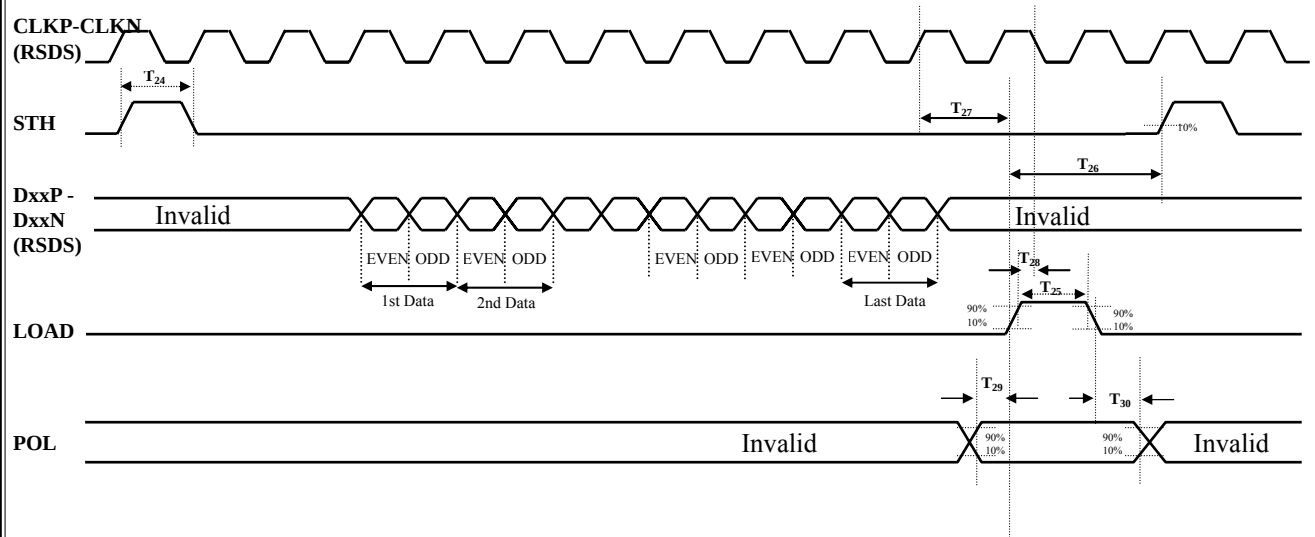


Document Title	HSD150SXA2- A Product Information	Page No.	25 / 35
Document No.		Revision	1.0

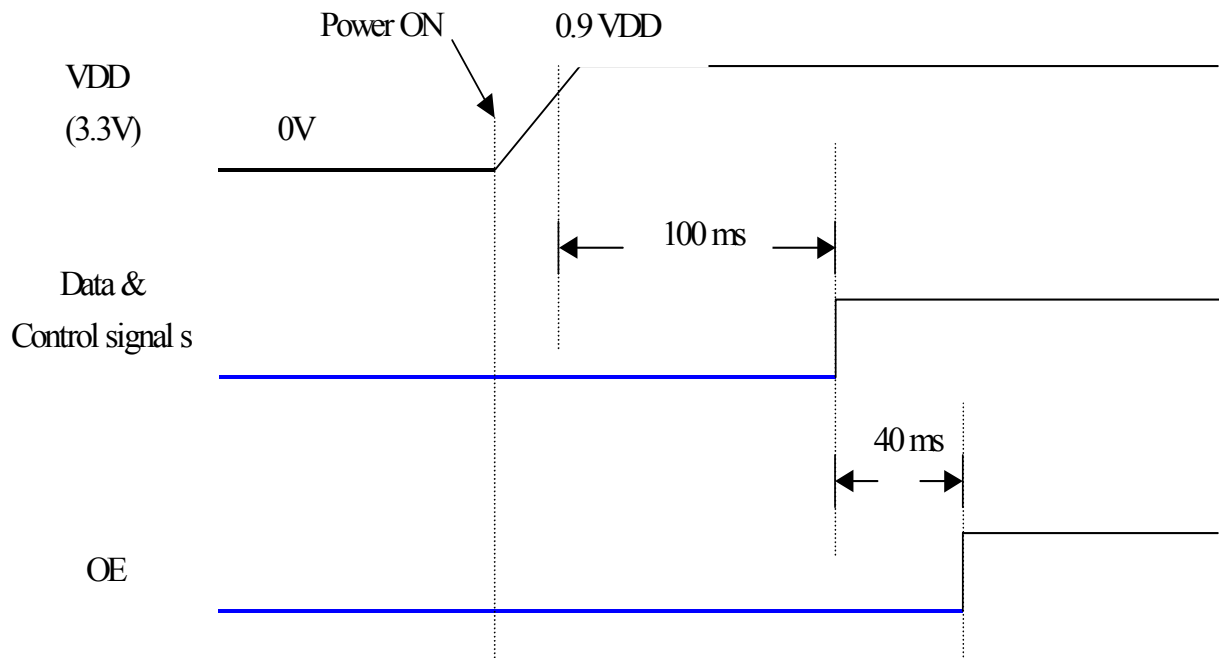

- * Input Power (VDD) should be 0V(GND) before Power-ON.
- * All signals (including control signals and data) should be kept **low** before it is active.

Document Title	HSD150SXA2- A Product Information	Page No.	26 / 35
Document No.		Revision	1.0

6.4 Power On / Off Sequence :

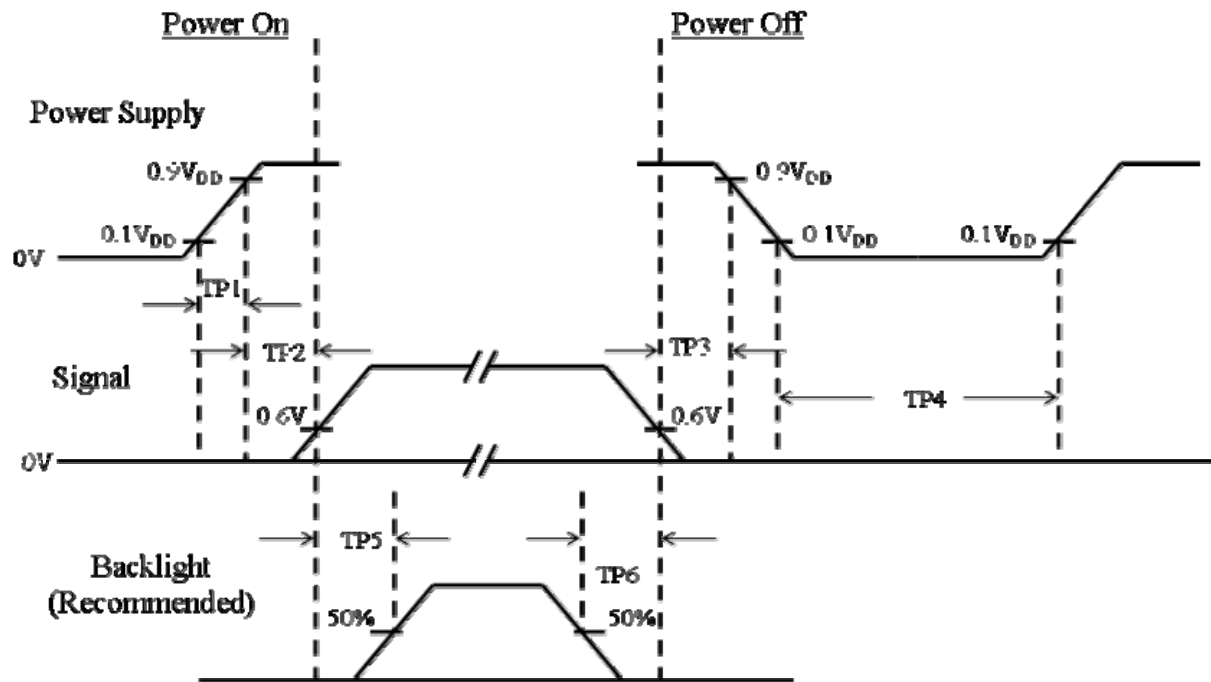


Item	Min.	Typ.	Max.	Unit	Remark
TP1	0.47	—	10	msec	
TP2	0	—	50	msec	
TP3	0	—	50	msec	
TP4	1	—	—	sec	
TP5	200	—	—	msec	
TP6	200	—	—	msec	

- Note : (1) The supply voltage of the external system for the module input should be the same as the definition of V_{DD}.
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of V_{DD} = off level, please keep the level of input signal on the low or keep a high impedance.
- (4) T4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.

Document Title	HSD150SXA2- A Product Information	Page No.	27 / 35
Document No.		Revision	1.0

7.0 Suggested Timing (VESA – 1024x768/60Hz) :

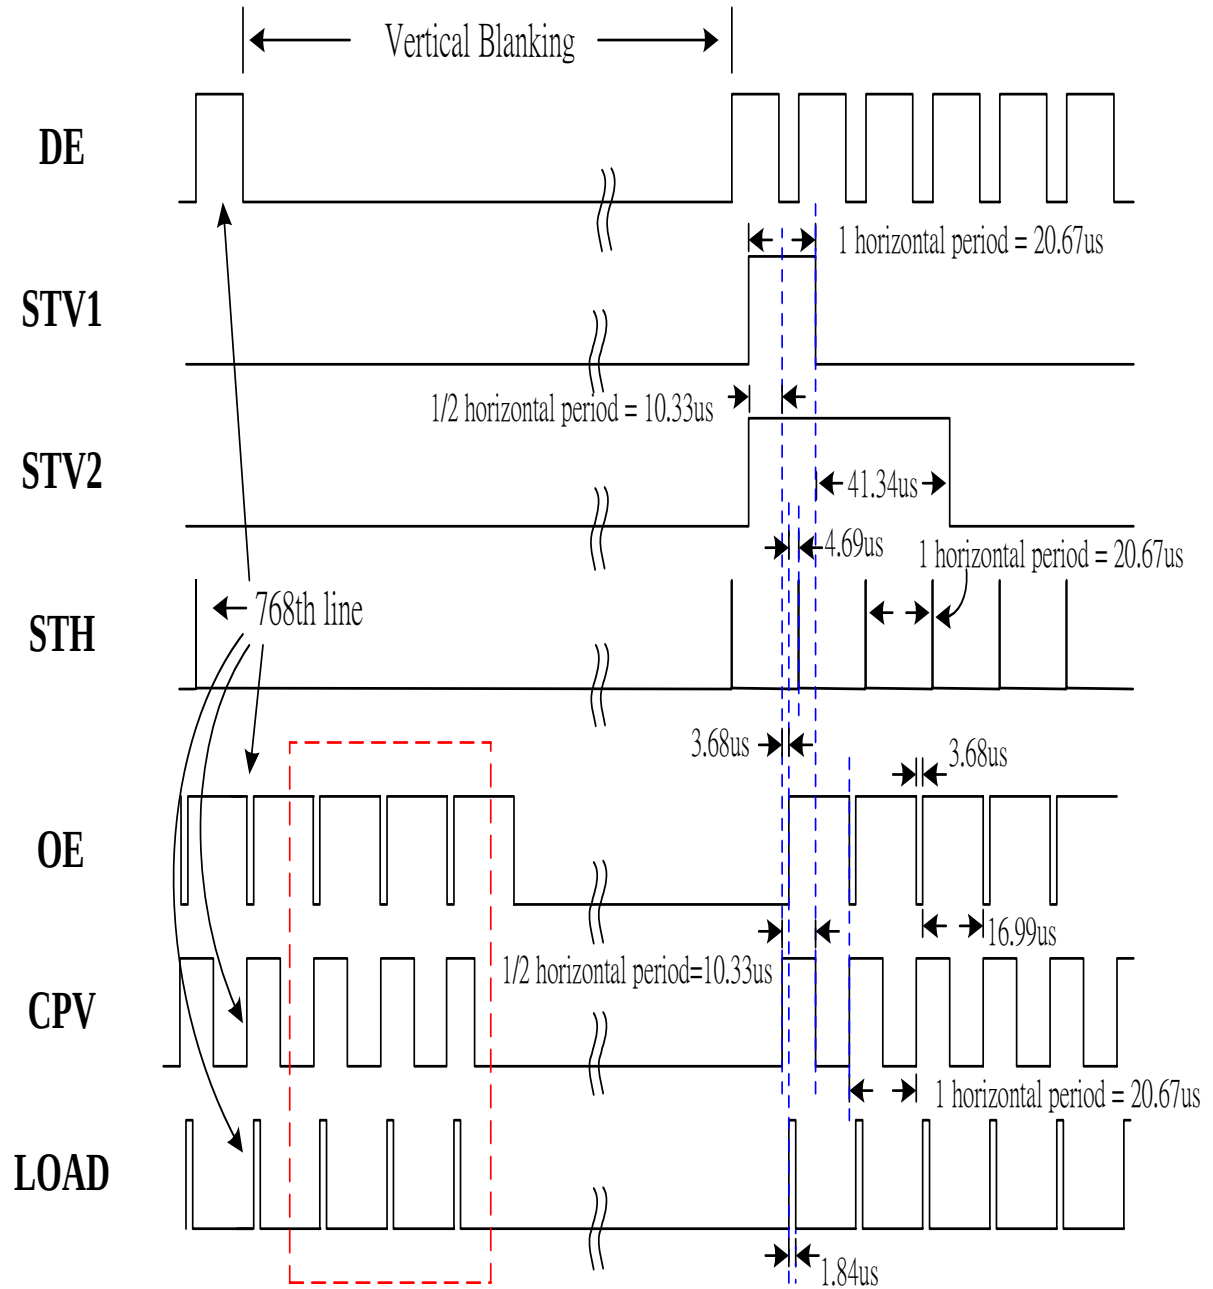


At least 3 pulses after the last line



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	28 / 35
Document No.		Revision	1.0

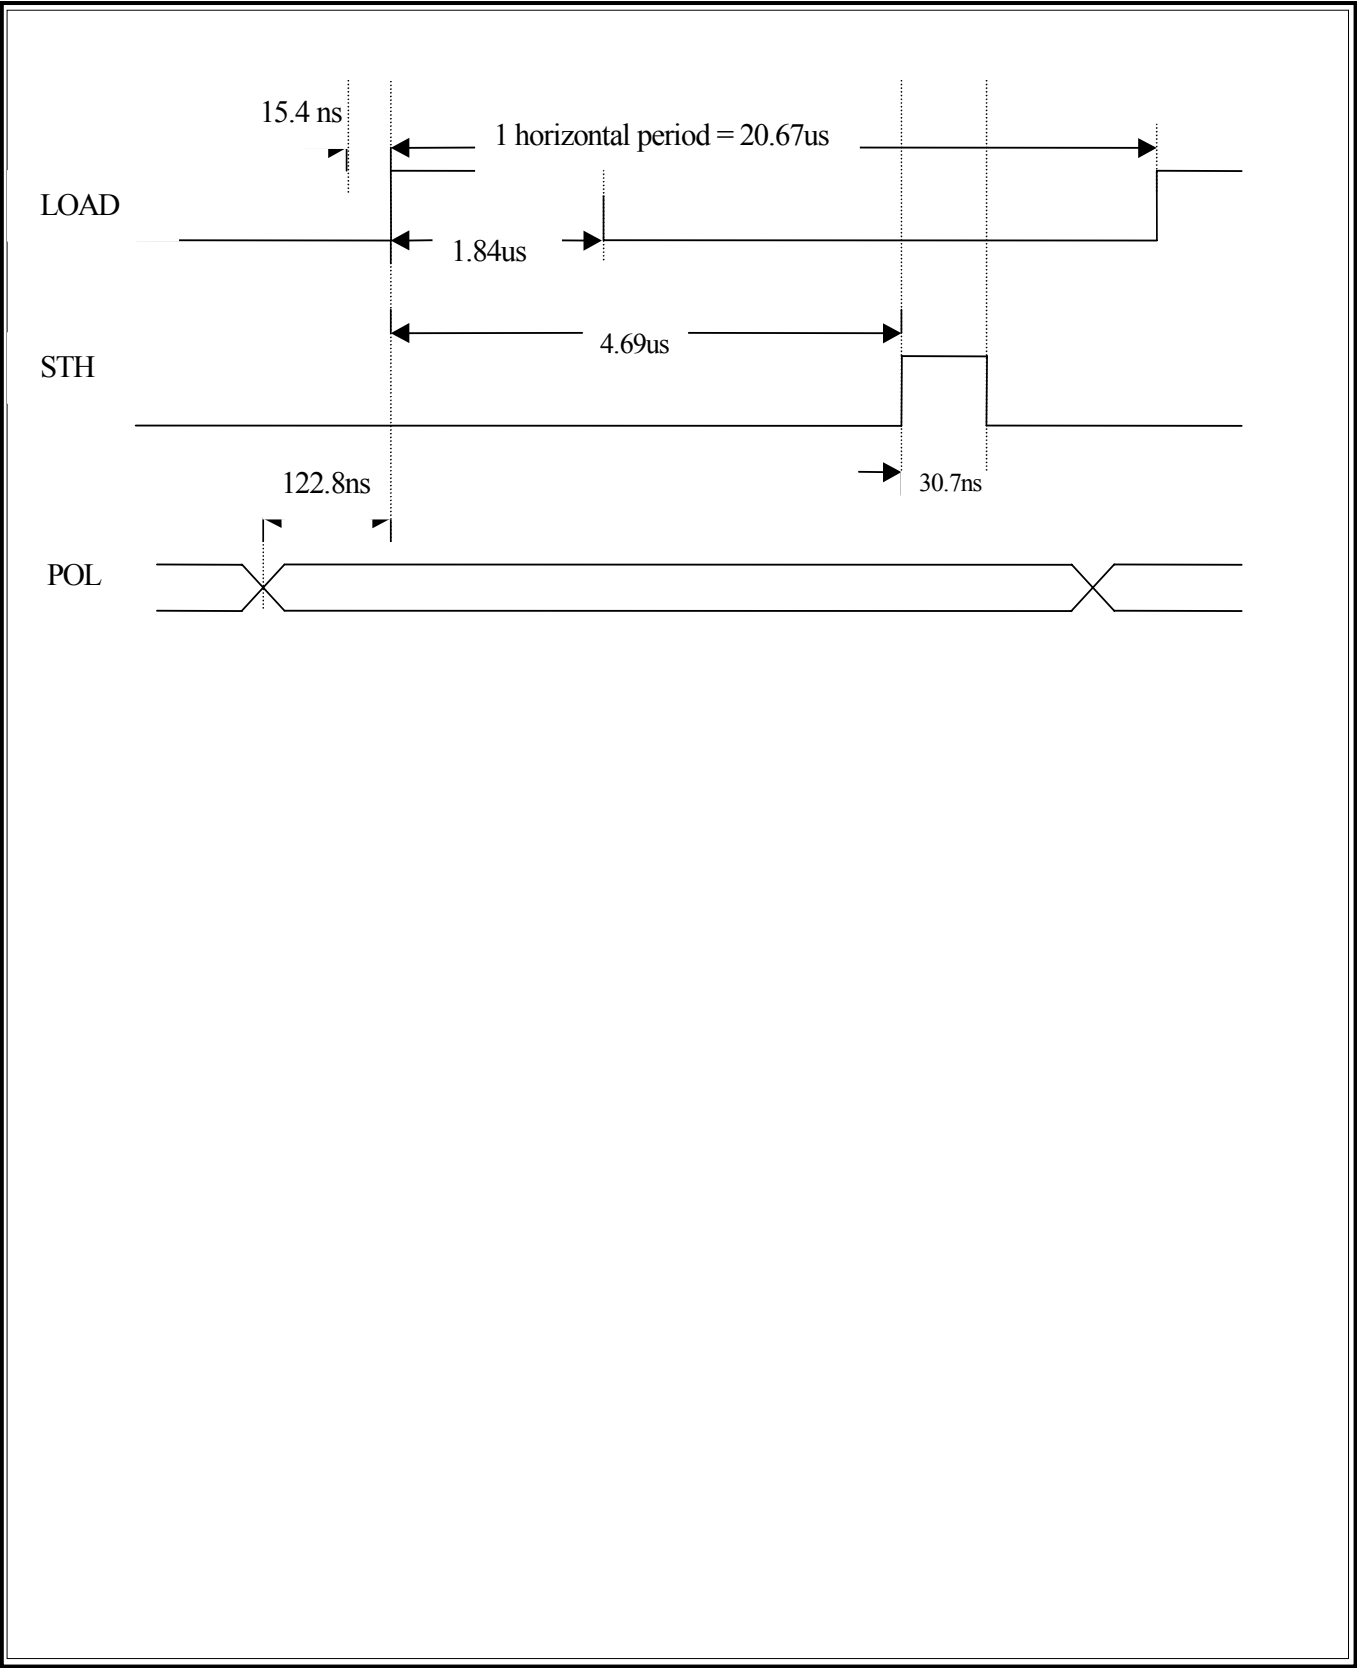


Document Title	HSD150SXA2- A Product Information	Page No.	29 / 35
Document No.		Revision	1.0


8.0 OUTLINE DIMENSION

8.1 Front View:

Date: 2004.02.24

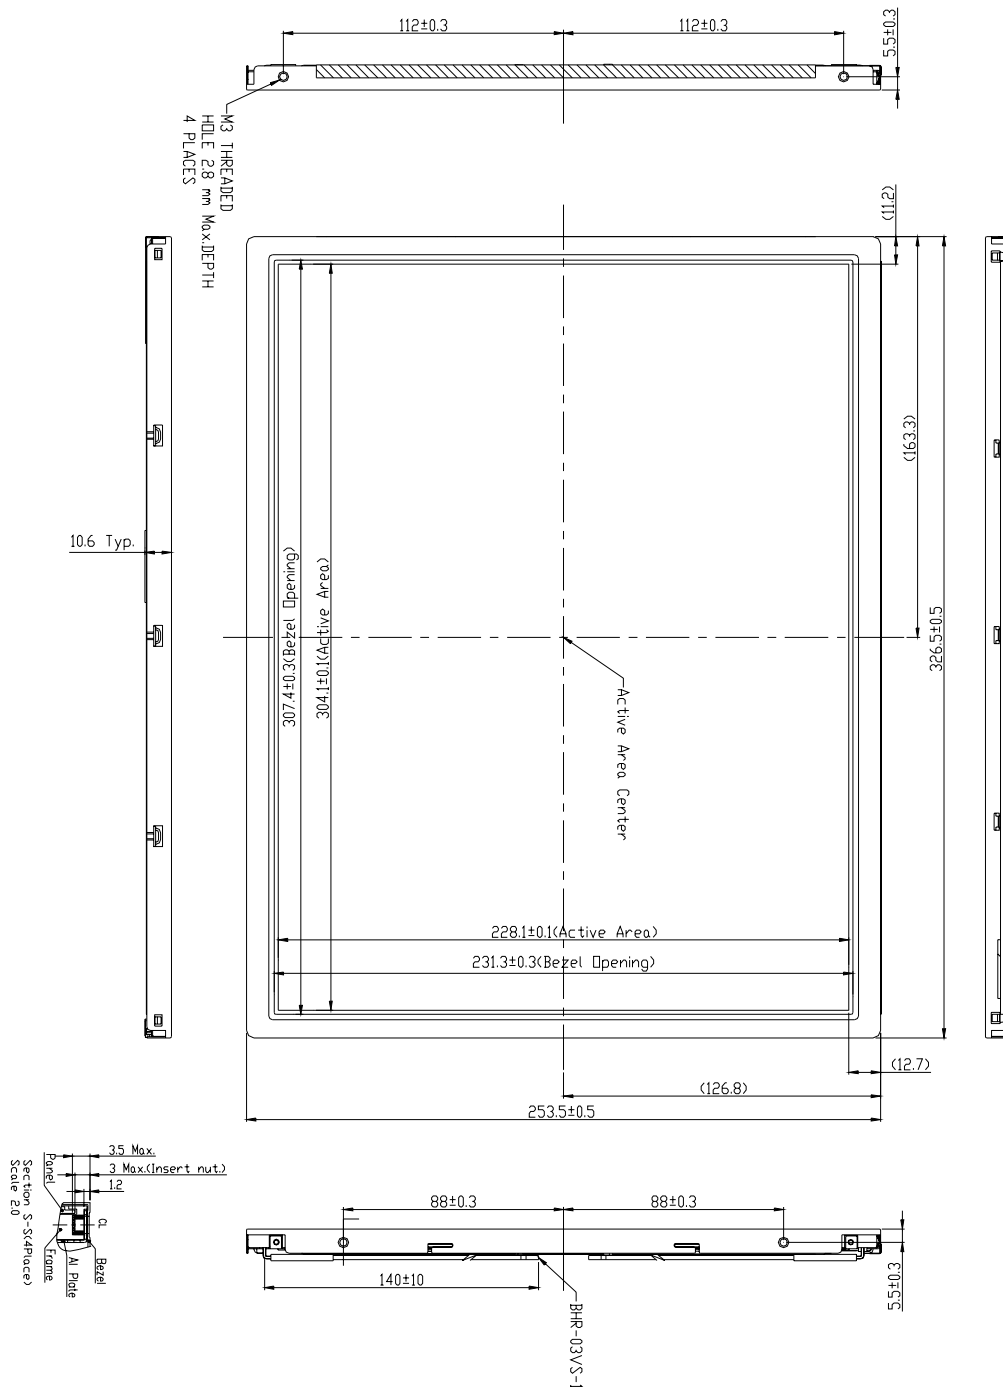

Document Title	HSD150SXA2- A Product Information	Page No.	30 / 35
Document No.		Revision	1.0

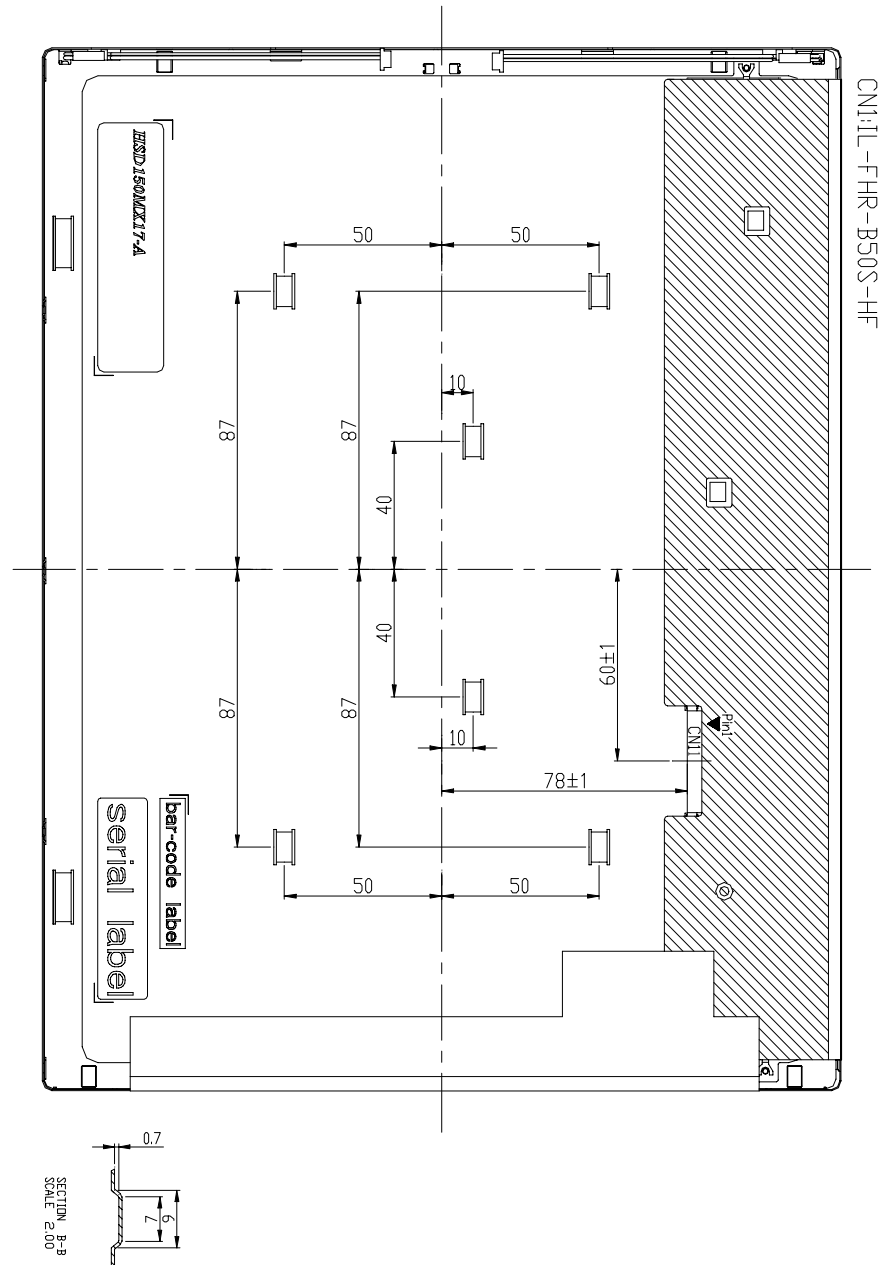8.2 Back View:**Date: 2004.02.24**

1. UNSPECIFIED DIMENSIONAL TOLERANCE ARE ±0.3mm

Document Title	HSD150SXA2- A Product Information	Page No.	31 / 35
Document No.		Revision	1.0

9.0 LOT MARK

9.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

code 1,2,3,4,5,6: HannStar internal flow control code.

code 7: production location.

code 8: production year.

code 9: production month.

code 10,11,12,13,14,15: serial number.

Note (1) Production Year

Year	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008
Mark	9	0	1	2	3	4	5	6	7	8

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C


9.2 Location of Lot Mark

(1) The label is attached to the backside of the LCD module.

(2) This is subject to change without prior notice.



Lot mark

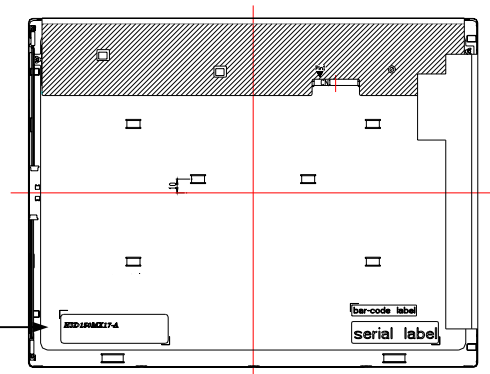


Document Title	HSD150SXA2- A Product Information	Page No.	32 / 35
Document No.		Revision	1.0

10.0 PACKAGE SPECIFICATION

10.1 packing form


- (1) package quantity in one carton: 15 pieces.
- (2) carton size: $464\pm 3\text{ mm}\times 360\pm 3\text{ mm}\times 431^H\pm 3\text{ mm}$.
- (3) for domestic transportation only.

10.2 packing assembly drawings

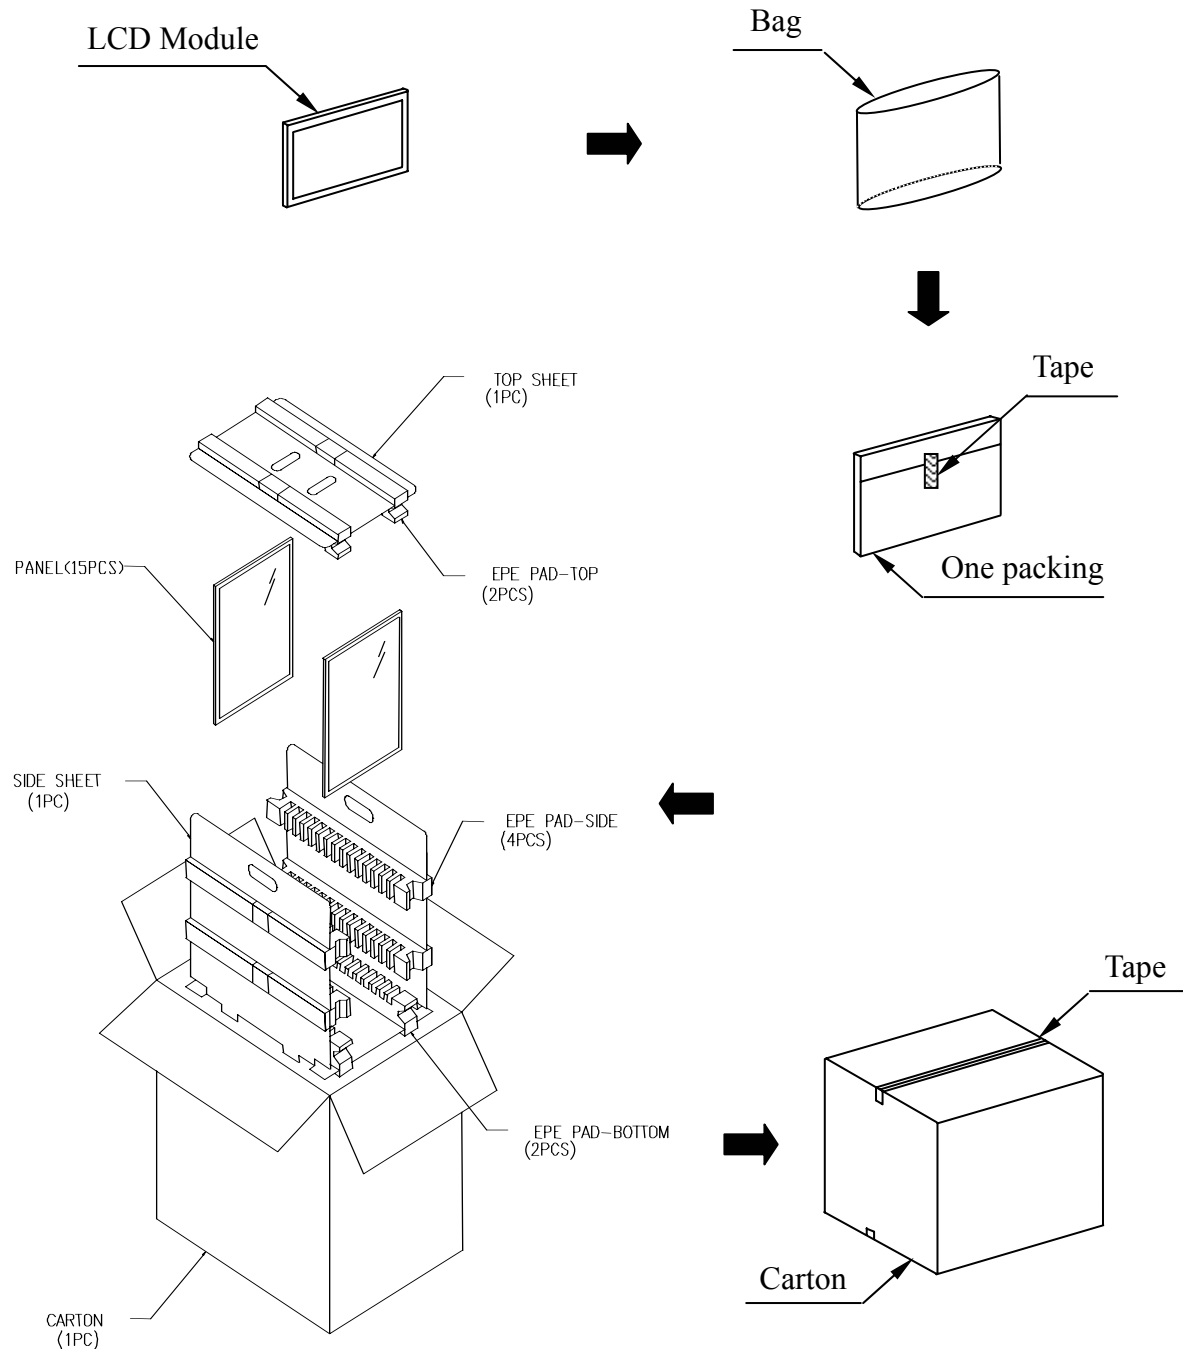

Document Title	HSD150SXA2- A Product Information	Page No.	33 / 35
Document No.		Revision	1.0

10.3 Pallet transportation specification

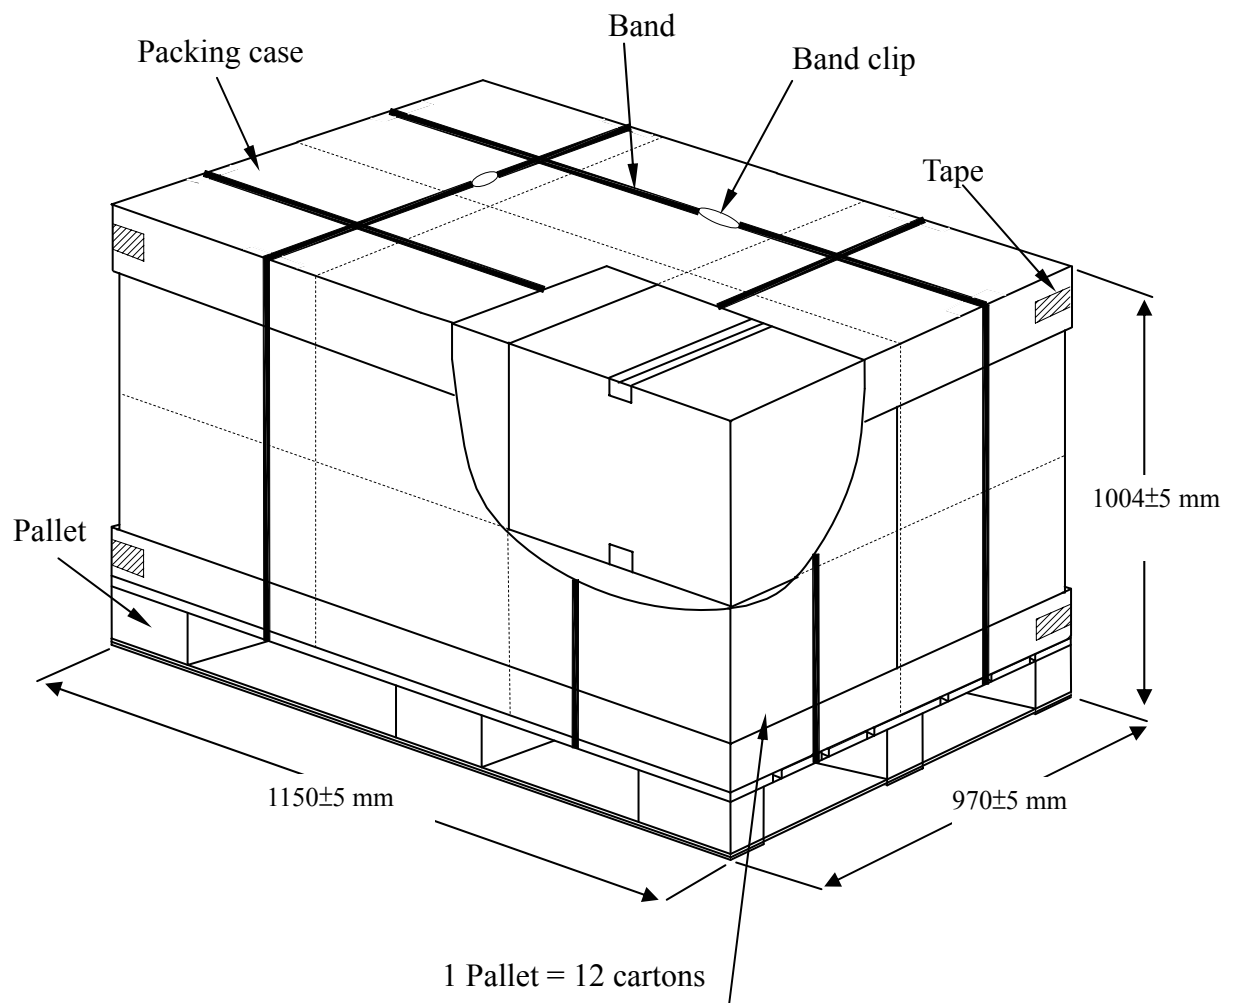



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	34 / 35
Document No.		Revision	1.0

11.0 GENERAL PRECAUTION

11.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life threatening or otherwise catastrophic.

11.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

11.3 Breakage of LCD Panel

- 11.3.1 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.
- 11.3.2 If liquid crystal contacts mouth or eyes, rinse out with water immediately.
- 11.3.3 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.
- 11.3.4 Handle carefully with chips of glass that may cause injury, when the glass is broken.

11.4 Electric Shock

- 11.4.1 Disconnect power supply before handling LCD module.
- 11.4.2 Do not pull or fold the CCFL cable.
- 11.4.3 Do not touch the parts inside LCD modules and the fluorescent lamp's connector or cables in order to prevent electric shock.

11.5 Absolute Maximum Ratings and Power Protection Circuit

- 11.5.1 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.
- 11.5.2 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.
- 11.5.3 It's recommended employing protection circuit for power supply.

11.6 Operation

- 11.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead. Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.
- 11.6.2 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.
- 11.6.3 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.
- 11.6.4 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzene or other adequate solvent.

11.7 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.



HannStar Display Corp.

Document Title	HSD150SXA2- A Product Information	Page No.	35 / 35
Document No.		Revision	1.0

11.8 Static Electricity

11.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.

11.8.2 Because LCD module uses CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge.

11.8.3 Persons who handle the module should be grounded through adequate methods.

11.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

11.10 Disposal

When disposing LCD module, obey the local environmental regulations.