



|                |  |          |        |
|----------------|--|----------|--------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 1 / 33 |
| Document No.   |  | Revision | 1.0    |

# HannStar Product Information

(Tentative)

**Model : HSD170PGW1  
-A00**

- Note:
- 1.The information contained herein is tentative and may be changed without prior notices.
  - 2.Please contact HannStar Display Corp. before designing your product based on this module specification.
  - 3.The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.



|                |  |          |        |
|----------------|--|----------|--------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 2 / 33 |
| Document No.   |  | Revision | 1.0    |

### Record of Revisions

| Rev. | Date         | Description of change  |
|------|--------------|--|
| 1.0  | Feb.16, 2006 | HSD170PGW1-A Tentative Product Information was first issued. |



|                |  |          |        |
|----------------|--|----------|--------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 3 / 33 |
| Document No.   |  | Revision | 1.0    |

## Contents

|      |                                  |      |
|------|----------------------------------|------|
| 1.0  | General description .....        | p.4  |
| 2.0  | Absolute maximum ratings .....   | p.6  |
| 3.0  | Optical characteristics .....    | p.8  |
| 4.0  | Block diagram .....              | p.13 |
| 5.0  | Interface pin connection .....   | p.16 |
| 6.0  | Electrical characteristics ..... | p.17 |
| 7.0  | Outline dimension .....          | p.25 |
| 8.0  | Lot mark .....                   | p.27 |
| 9.0  | Package specification .....      | p.28 |
| 10.0 | General precaution .....         | p.29 |

|                |  |          |        |
|----------------|--|----------|--------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 4 / 33 |
| Document No.   |  | Revision | 1.0    |

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

HannStar Display model HSD170PGW1-A is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 17.0 inch diagonally measured active display area with XGA resolution (900 vertical by 1440 horizontal pixel array) and can display up to 262,144 colors.

### 1.2 Features

- 17.0 WXGA+ for Notebook PC
- 2-ch LVDS interface system
- Compatible with VESA standard
- Input timing: DE mode
- Wide Viewing Angle
- RoHS compliance

### 1.3 Applications

- Notebook PC
- Desktop Monitor
- Display terminals for AV applications
- Display terminals for industrial applications

### 1.4 General information

| Item              | Specification                 | Unit                         |   |
|-------------------|-------------------------------|------------------------------|---|
| Outline Dimension | 382.2 x 244.5 x 6.2 (Typ)     | mm                           |   |
| Display area      | 367.2 (H) x 229.5 (V)         | mm                           |   |
| Number of Pixel   | 1440(H) x 900(V)              | pixels                       |   |
| Pixel pitch       | 0.255(H) x 0.255(V)           | mm                           |   |
| Pixel arrangement | RGB Vertical stripe           |                              |   |
| Display color     | 6 Bits / 262,144              | colors                       |   |
| Display mode      | Normally white                |                              |   |
| Surface treatment | Glare, Hard- Coating (3H)     |                              |   |
| Weight            | 675 (Typ.)                    | g                            |   |
| Back-light        | Single CCFL (Side-Light type) |                              |   |
| Input signal      | 2-ch LVDS                     |                              |   |
| Power Consumption | Logic System                  | 1.45 (typ.) @v-color pattern | W |
|                   | B/L System                    | 4.9 (typ.)                   | W |



|                |  |          |        |
|----------------|--|----------|--------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 5 / 33 |
| Document No.   |  | Revision | 1.0    |

### 1.5 Mechanical Information

|                               | Item          | Min.  | Typ.  | Max.  | Unit   |
|-------------------------------|---------------|-------|-------|-------|--------|
| Module Size                   | Horizontal(H) | 381.7 | 382.2 | 382.7 | mm     |
|                               | Vertical(V)   | 244   | 244.5 | 245   | mm     |
|                               | Depth(D)      | —     | 6.2   | 6.5   | mm     |
| Weight (Without inverter)     |               | —     | 675   | 690   | g      |
| Torque of customer screw hole |               | —     | -     | 2.5   | Kgf•Cm |


|                |  |          |        |
|----------------|--|----------|--------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 6 / 33 |
| Document No.   |  | Revision | 1.0    |

## 2.0 ABSOLUTE MAXIMUM RATINGS

### 2.1 Absolute Rating of Environment

| Item                        | Symbol            | Min. | Max. | Unit | Note |
|-----------------------------|-------------------|------|------|------|------|
| Storage temperature         | T <sub>STG</sub>  | -20  | 60   | °C   |      |
| Operating temperature       | T <sub>OPR</sub>  | 0    | 50   | °C   | (1)  |
| Vibration(non-operating)    | V <sub>NOP</sub>  | —    | 1.5  | G    | (2)  |
| Shock(non-operating)        | S <sub>NOP</sub>  | —    | 220  | G    | (3)  |
| Storage humidity            | H <sub>STG</sub>  | 10   | 90   | %RH  | (3)  |
| Operating humidity          | H <sub>OP</sub>   | 10   | 80   | %RH  | (4)  |
| Low pressure(operating)     | P <sub>LOP</sub>  | 697  | —    | hPa  | (5)  |
| Low pressure(non-operating) | P <sub>LNOP</sub> | 116  | —    | hPa  | (6)  |

Note (1) Storage / Operating temperature

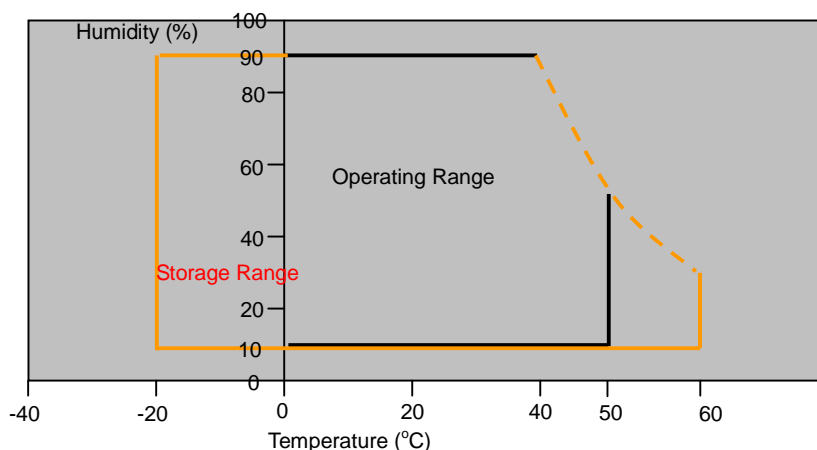

- (2) 5-500-5Hz sine wave, X,Y,Z each directions, 30min/cycle.
- (3) 2ms, ±X, ±Y, ±Z direction, one time each. For this shock test, it is necessary to fill the silicon rubber between the shock jig as buffer.
- (4) Max wet bulb temp.=39°C
- (5) 2hrs. (10000 feet)
- (6) 24hrs. (50000 feet)

|                |  |          |        |
|----------------|--|----------|--------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 7 / 33 |
| Document No.   |  | Revision | 1.0    |

## 2.2 Electrical Absolute Rating

### 2.2.1 TFT LCD Module

| Item                 | Symbol   | Min. | Max.    | Unit | Note    |
|----------------------|----------|------|---------|------|---------|
| Power supply voltage | $V_{DD}$ | -0.3 | 4.0     | V    | (1) (2) |
| Logic input voltage  | $V_{IN}$ | -0.3 | VDD+0.3 | V    | (1) (2) |

### 2.2.2 Back-Light Unit

| Item           | Symbol | Min. | Max. | Unit | Note    |
|----------------|--------|------|------|------|---------|
| Lamp current   | $I_L$  | 3    | 7.5  | mA   | (1) (2) |
| Lamp frequency | $f_L$  | 30   | 80   | KHz  | (1) (2) |

Note (1) Permanent damage may occur to the LCD module if beyond this specification.  
Functional operation should be restricted to the conditions described under normal operating conditions.

(2)  $T_a = 25 \pm 2^\circ\text{C}$

|                |  |          |        |
|----------------|--|----------|--------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 8 / 33 |
| Document No.   |  | Revision | 1.0    |

### 3.0 OPTICAL CHARACTERISTICS

#### 3.1 Optical specification

| Item                                     |         | Symbol     | Condition                   | Min.  | Typ.  | Max.  | Unit | Note              |
|--|---------|------------|-----------------------------|-------|-------|-------|------|-------------------|
| Contrast                                 |         | CR         | $\Theta=0$<br>viewing angle | 600   | 800   | -     |      | (1)(2)            |
| Response time                            | Rising  | $T_R$      |                             | -     | 6     | 13    | msec | (1)(3)            |
|  | Falling | $T_F$      |                             | -     | 10    | 17    |      |                   |
| White luminance<br>(Average of 5 points) |         | $Y_L$      |                             |       | 170   | 200   | -    | cd/m <sup>2</sup> |
| Color chromaticity<br>(CIE1931)          | Red     | $R_x$      | $\Theta=0$<br>viewing angle | 0.591 | 0.621 | 0.651 |      | (1)(4)            |
|  |         | $R_y$      |                             | 0.319 | 0.349 | 0.379 |      |                   |
|  | Green   | $G_x$      |                             | 0.290 | 0.320 | 0.350 |      |                   |
|  |         | $G_y$      |                             | 0.528 | 0.558 | 0.588 |      |                   |
|  | Blue    | $B_x$      |                             | 0.126 | 0.156 | 0.186 |      |                   |
|  |         | $B_y$      |                             | 0.119 | 0.149 | 0.179 |      |                   |
|  | White   | $W_x$      |                             | 0.283 | 0.313 | 0.343 |      |                   |
|  |         | $W_y$      |                             | 0.299 | 0.329 | 0.359 |      |                   |
| Viewing angle                            | Hor.    | $\Theta_L$ | CR>10                       | 65    | 70    | -     |      |                   |
|  |         | $\Theta_R$ |                             | 65    | 70    | -     |      |                   |
|  | Ver.    | $\Theta_U$ |                             | 60    | 65    | -     |      |                   |
|  |         | $\Theta_D$ |                             | 60    | 65    | -     |      |                   |
| Brightness uniformity                    |         | $B_{UNI}$  | $\Theta=0$                  | 50    | -     | -     | %    | (6)               |

#### 3.2 Measuring Condition

- Measuring surrounding: dark room
- Lamp current  $I_{BL}$ : (6.5)±0.1mA
- $V_{DD}=3.3V\pm0.05V$
- Ambient temperature : 25±2°C
- 30min. Warm-up time.




|                |  |          |        |
|----------------|--|----------|--------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 9 / 33 |
| Document No.   |  | Revision | 1.0    |

### 3.3 Measuring Equipment

- FPM520 of Westar Electric Corp., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size : 20~21mm

Note (1) Definition of Viewing Angle :

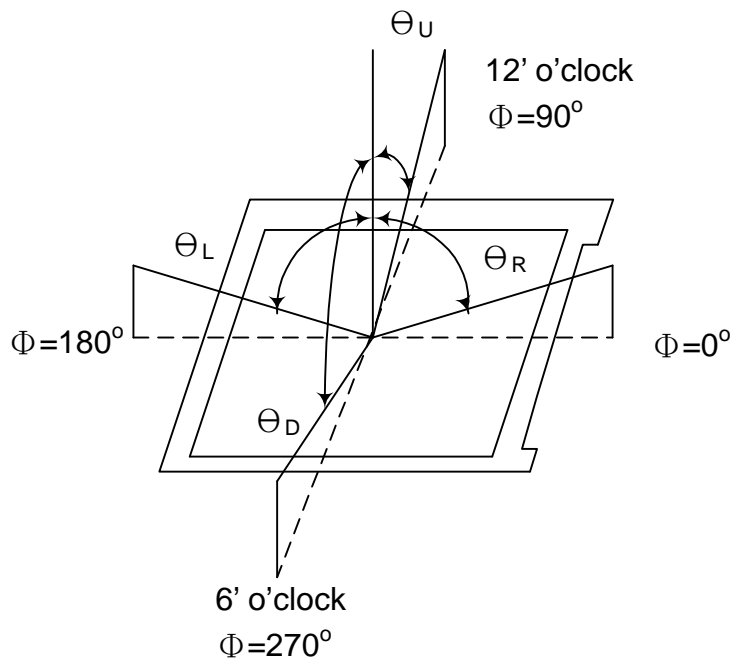


Note (2) Definition of Contrast Ratio(CR) : measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white (L63)}}{\text{Luminance with all pixels black (L0)}}$$

Note (3) Definition of Response Time : Sum of  $T_R$  and  $T_F$

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 10 / 33 |
| Document No.   |  | Revision | 1.0     |

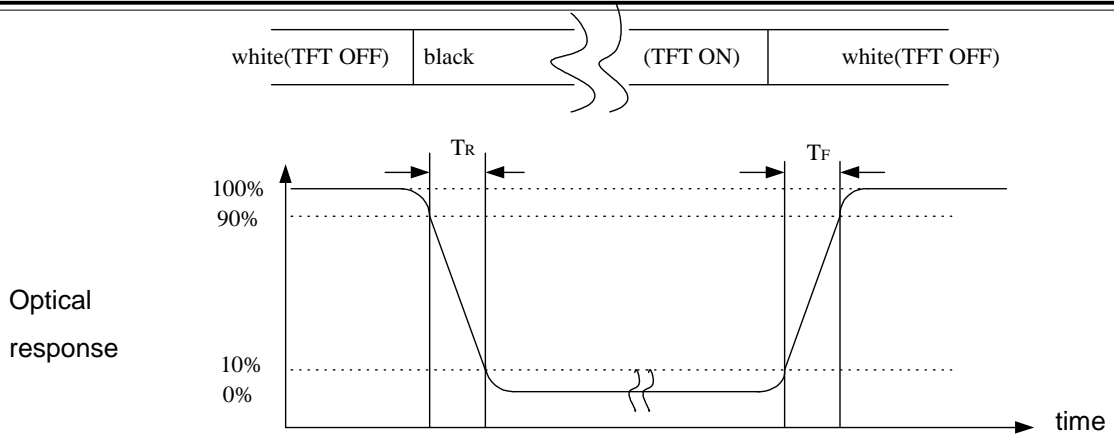


Note (4) Optical characteristic measurement setup

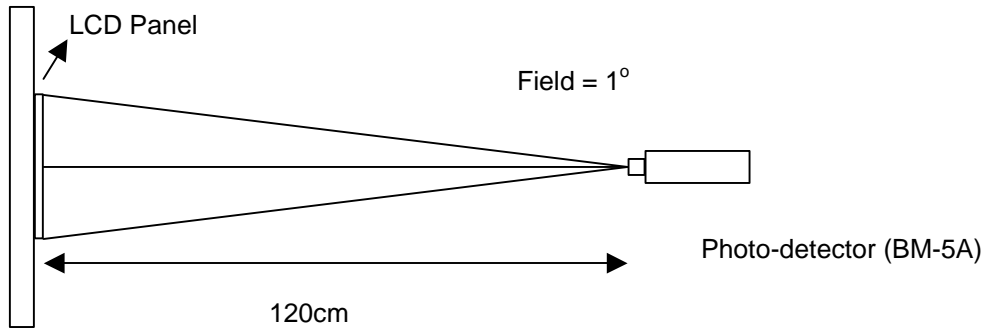

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 11 / 33 |
| Document No.   |  | Revision | 1.0     |

Note (5) Definition of Average Luminance of White (5 Point )

$$\text{Average Luminance} = \frac{Y_1+Y_2+Y_3+Y_4+Y_5}{5}$$

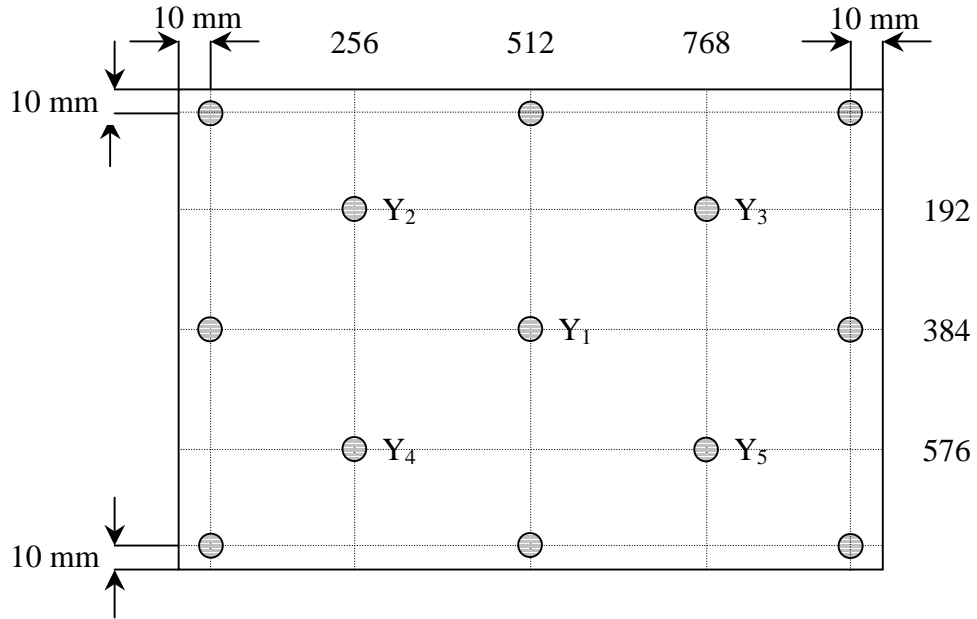


Note (6) Definition of brightness uniformity

$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 13 points})}{(\text{Max Luminance of 13 points})} \times 100\%$$


|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 12 / 33 |
| Document No.   |  | Revision | 1.0     |

## 4.0 BLOCK DIAGRAM

### 4.1 TFT LCD Module

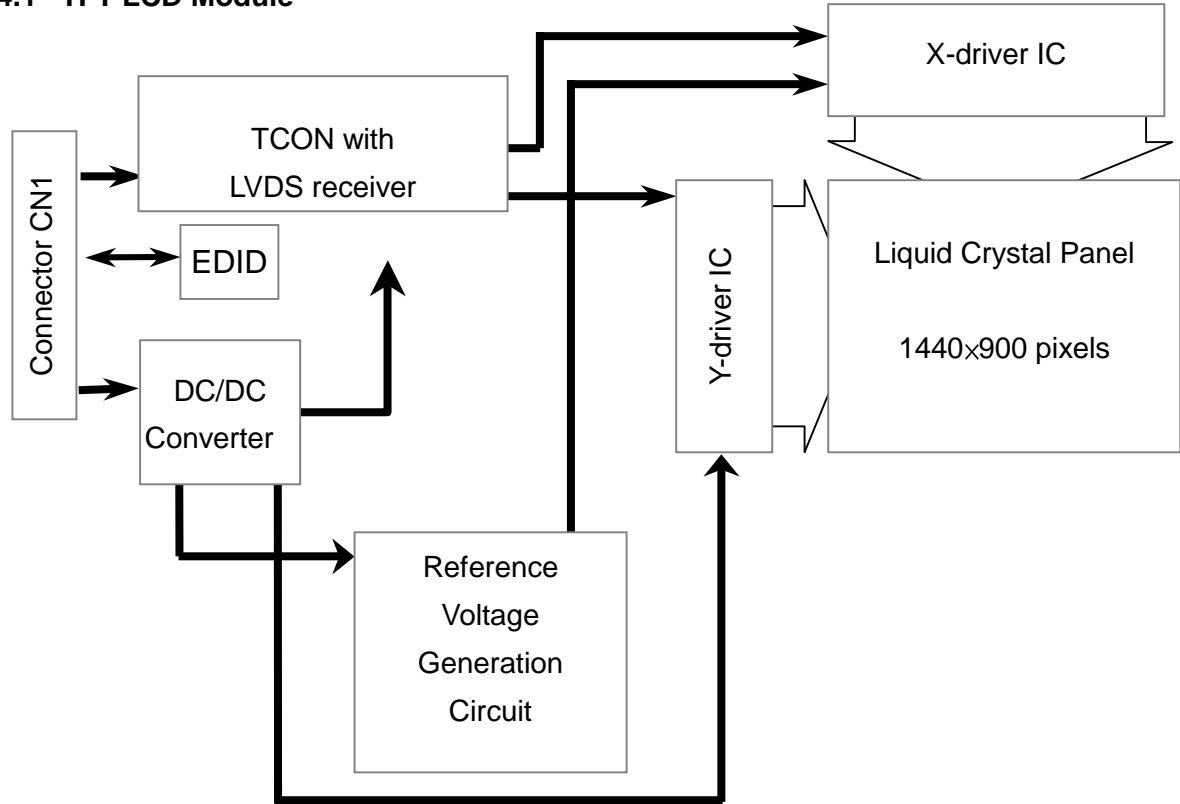


### 4.2 Back Light Unit

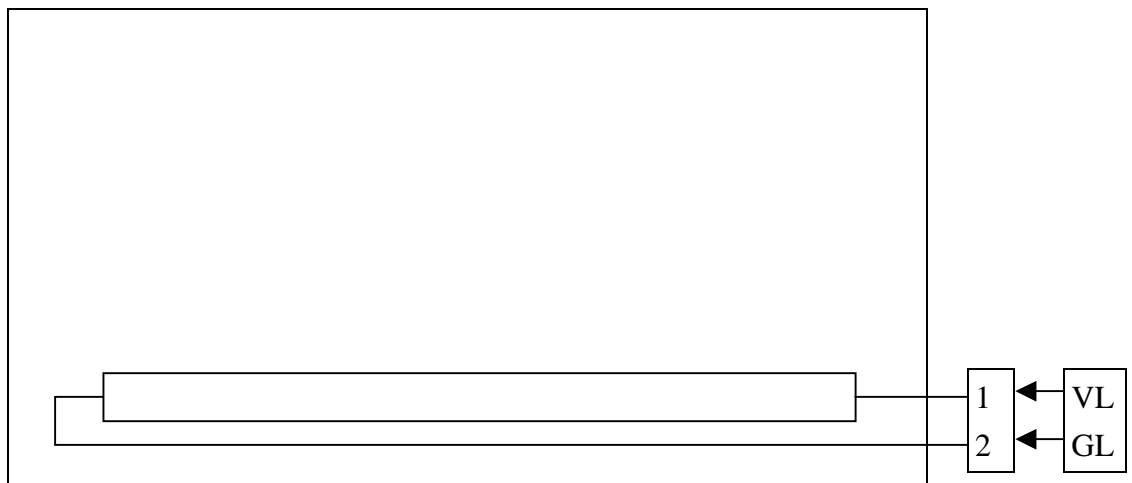

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 13 / 33 |
| Document No.   |  | Revision | 1.0     |

### 4.3 Pixel Format

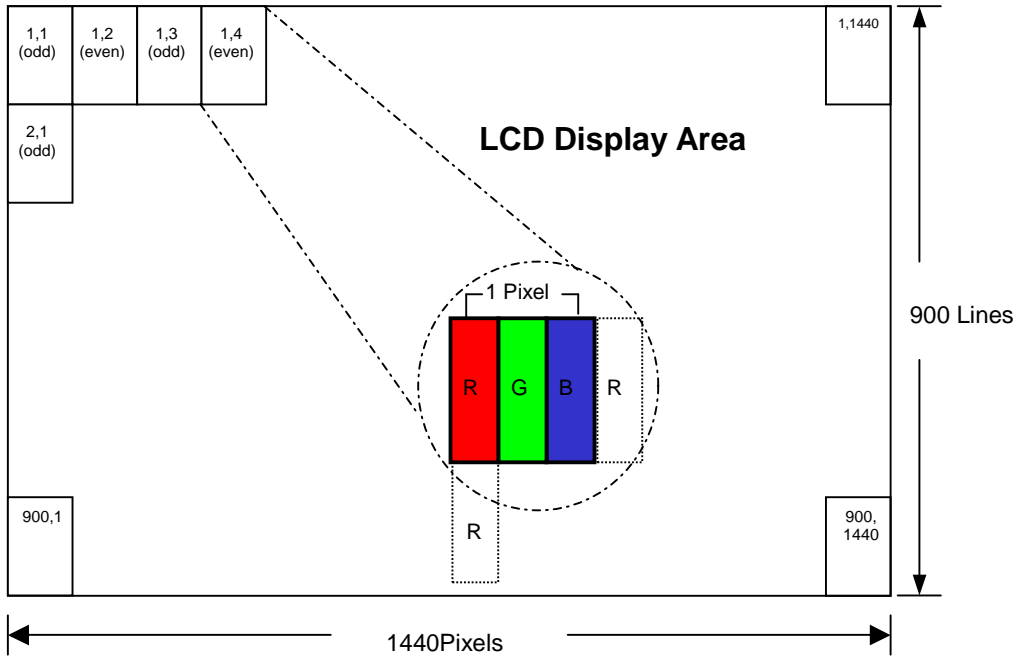

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 14 / 33 |
| Document No.   |  | Revision | 1.0     |

#### 4.4 Relationship Between Displayed Color and Input

|                         | Display                     | MSB   |    |    |    |    | LSB |    |    |    |    | MSB |    |    |    |          | LSB |    |    |           |     | Gray scale level |
|-------------------------|-----------------------------|-------|----|----|----|----|-----|----|----|----|----|-----|----|----|----|----------|-----|----|----|-----------|-----|------------------|
|                         |                             | R5    | R4 | R3 | R2 | R1 | R0  | G5 | G4 | G3 | G2 | G1  | G0 | B5 | B4 | B3       | B2  | B1 | B0 |           |     |                  |
| Basic color             | Black                       | L     | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | -         |     |                  |
|                         | Blue                        | L     | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | H  | H  | H        | H   | H  | H  | -         |     |                  |
|                         | Green                       | L     | L  | L  | L  | L  | L   | H  | H  | H  | H  | H   | H  | L  | L  | L        | L   | L  | L  | -         |     |                  |
|                         | Light Blue                  | L     | L  | L  | L  | L  | L   | H  | H  | H  | H  | H   | H  | H  | H  | H        | H   | H  | H  | -         |     |                  |
|                         | Red                         | H     | H  | H  | H  | H  | H   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | -         |     |                  |
|                         | Purple                      | H     | H  | H  | H  | H  | H   | L  | L  | L  | L  | L   | L  | H  | H  | H        | H   | H  | H  | -         |     |                  |
|                         | Yellow                      | H     | H  | H  | H  | H  | H   | H  | H  | H  | H  | H   | H  | L  | L  | L        | L   | L  | L  | -         |     |                  |
|                         | White                       | H     | H  | H  | H  | H  | H   | H  | H  | H  | H  | H   | H  | H  | H  | H        | H   | H  | H  | -         |     |                  |
| Gray scale of Red       | Black                       | L     | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | L0        |     |                  |
|                         | Dark<br>↑<br>↓<br>Light     | L     | L  | L  | L  | L  | H   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | L1        |     |                  |
|                         |                             | L     | L  | L  | L  | H  | L   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | L2        |     |                  |
|                         |                             |       |    | :  | :  | :  | :   |    |    |    |    |     | :  | :  | :  | L3...L60 |     |    |    |           |     |                  |
|                         |                             |       | H  | H  | H  | H  | L   | H  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | L         | L61 |                  |
|                         |                             |       | H  | H  | H  | H  | H   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | L         | L62 |                  |
|                         | Red                         | H     | H  | H  | H  | H  | H   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | Red L63   |     |                  |
|                         | Gray scale of Green         | Black | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | L         | L0  |                  |
| Dark<br>↑<br>↓<br>Light |                             | L     | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | H  | L  | L  | L        | L   | L  | L  | L1        |     |                  |
|                         |                             | L     | L  | L  | L  | L  | L   | L  | L  | L  | L  | H   | L  | L  | L  | L        | L   | L  | L  | L2        |     |                  |
|                         |                             |       |    | :  | :  | :  | :   |    |    |    |    |     | :  | :  | :  | L3...L60 |     |    |    |           |     |                  |
|                         |                             | L     | L  | L  | L  | L  | L   | H  | H  | H  | H  | L   | H  | L  | L  | L        | L   | L  | L  | L61       |     |                  |
|                         |                             | L     | L  | L  | L  | L  | L   | H  | H  | H  | H  | H   | L  | L  | L  | L        | L   | L  | L  | L62       |     |                  |
| Green                   |                             | L     | L  | L  | L  | L  | L   | H  | H  | H  | H  | H   | H  | L  | L  | L        | L   | L  | L  | Green L63 |     |                  |
| Gray scale of Blue      |                             | Black | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | L         | L0  |                  |
|                         | Dark<br>↑<br>↓<br>Light     | L     | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | H  | L  | L1        |     |                  |
|                         |                             | L     | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | H  | L  | L2        |     |                  |
|                         |                             |       |    | :  | :  | :  | :   |    |    |    |    |     | :  | :  | :  | L3...L60 |     |    |    |           |     |                  |
|                         |                             |       | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | H  | H  | H        | H   | L  | H  | L61       |     |                  |
|                         |                             |       | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | H  | H  | H        | H   | H  | L  | L62       |     |                  |
|                         | Blue                        | L     | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | H  | H  | H        | H   | H  | H  | Blue L63  |     |                  |
|                         | Gray scale of White & Black | Black | L  | L  | L  | L  | L   | L  | L  | L  | L  | L   | L  | L  | L  | L        | L   | L  | L  | L         | L0  |                  |
| Dark<br>↑<br>↓<br>Light |                             | L     | L  | L  | L  | L  | H   | L  | L  | L  | L  | L   | H  | L  | L  | L        | L   | L  | H  | L1        |     |                  |
|                         |                             | L     | L  | L  | L  | H  | L   | L  | L  | L  | L  | H   | L  | L  | L  | L        | L   | H  | L  | L2        |     |                  |
|                         |                             |       |    | :  | :  | :  | :   |    |    |    |    |     | :  | :  | :  | L3...L60 |     |    |    |           |     |                  |
|                         |                             | H     | H  | H  | H  | L  | H   | H  | H  | H  | H  | L   | H  | H  | H  | H        | H   | L  | H  | L61       |     |                  |
|                         |                             | H     | H  | H  | H  | H  | L   | H  | H  | H  | H  | H   | L  | H  | H  | H        | H   | H  | L  | L62       |     |                  |
| White                   |                             | H     | H  | H  | H  | H  | H   | H  | H  | H  | H  | H   | H  | H  | H  | H        | H   | H  | H  | White L63 |     |                  |

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 15 / 33 |
| Document No.   |  | Revision | 1.0     |

## 5.0 INTERFACE PIN CONNECTION

### 5.1 TFT LCD Module

CN1 (INPUT SIGNAL): 093F30-B0B01A (STARCONN or equivalent)

MATING CONNECTOR: FI-X30M or compatible

| Terminal no. | Symbol      | Function   | Note |
|--------------|-------------|--|------|
| 1            | GND         | Ground   |      |
| 2            | VDD         | Power Supply : +3.3V                               |      |
| 3            | VDD         | Power Supply : +3.3V                               |      |
| 4            | VEDID       | DDC 3.3V power                                     |      |
| 5            | NC          | Reserved for supplier test point                   |      |
| 6            | ClkEDID     | DDC clock  |      |
| 7            | DataEDID    | DDC data   |      |
| 8            | Odd_Rin0-   | - LVDS differential data input (R0-R5, G0)         | (2)  |
| 9            | Odd_Rin0+   | + LVDS differential data input (R0-R5, G0)         | (2)  |
| 10           | GND         | Ground   |      |
| 11           | Odd_Rin1-   | - LVDS differential data input (G1-G5, B0-B1)      | (2)  |
| 12           | Odd_Rin1+   | + LVDS differential data input (G1-G5, B0-B1)      | (2)  |
| 13           | GND         | Ground   |      |
| 14           | Odd_Rin2-   | - LVDS differential data input (B2-B5,NC,NC,DE)    | (2)  |
| 15           | Odd_Rin2+   | + LVDS differential data input (B2-B5,NC,NC,DE)    | (2)  |
| 16           | GND         | Ground   |      |
| 17           | Odd_ClkIN-  | - LVDS differential clock input                    | (2)  |
| 18           | Odd_ClkIN+  | + LVDS differential clock input                    | (2)  |
| 19           | GND         | Ground   |      |
| 20           | Even_Rin0-  | - LVDS differential data input (R0-R5, G0)         |      |
| 21           | Even_Rin0+  | + LVDS differential data input (R0-R5, G0)         |      |
| 22           | GND         | Ground   |      |
| 23           | Even_Rin1-  | - LVDS differential data input (G1-G5, B0-B1)      |      |
| 24           | Even_Rin1+  | + LVDS differential data input (G1-G5, B0-B1)      |      |
| 25           | GND         | Ground   |      |
| 26           | Even_Rin2-  | - LVDS differential data input (B2-B5,NC,NC,DE)    |      |
| 27           | Even_Rin2+  | + LVDS differential data input (B2-B5, NC, NC, DE) |      |
| 28           | GND         | Ground   |      |
| 29           | Even_ClkIN- | - LVDS differential clock input                    |      |
| 30           | Even_ClkIN+ | + LVDS differential clock input                    |      |

Note (1) Please connects NC pin to nothing. Don't connect it to ground nor to other signal input.  
(NC pin should be open.)

Note (2)The module used a 100ohm resistor between positive and negative data lines of each receiver input.

### 5.2 Back-Light Unit

CN2 CCFL Power Source (BHSR-02VS-1 or equivalent) / JAPAN SOLDERLESS TERMINAL MFG CO., LTD.

Mating Connector: (SBHT-002T-P0.5) / JAPAN SOLDERLESS TERMINAL MFG CO., LTD.

| Terminal no. | Symbol | Function                         |
|--------------|--------|----------------------------------|
| 1            | VL     | CCFL power supply (high voltage) |
| 2            | GL     | CCFL power supply (low voltage)  |

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 16 / 33 |
| Document No.   |  | Revision | 1.0     |


## 6.0 ELECTRICAL CHARACTERISTICS

### 6.1 TFT LCD Module


| Item                    | Symbol     | Min.      | Typ.   | Max.   | Unit | Note       |     |
|-------------------------|------------|-----------|--------|--------|------|------------|-----|
| Voltage of power supply | $V_{DD}$   | 3.0       | 3.3    | 3.6    | V    |            |     |
| Current of power supply | White      | $I_{DD0}$ | -      | 330    | -    | mA         | (1) |
|                         | V-Color    | $I_{DD1}$ | -      | 440    | -    | mA         | (1) |
|                         | Mosaic     | $I_{DD2}$ | -      | 560    | -    | mA         | (1) |
| Vsync frequency         | $f_V$      | -         | 60     | -      | Hz   | ref 6.5 t1 |     |
| Hsync frequency         | $f_H$      | -         | 55.469 | 55.935 | KHz  | ref 6.5 t4 |     |
| Frequency               | $f_{DCLK}$ | -         | 88.75  | 106.5  | MHz  | ref 6.5 t7 |     |
| Input rush current      | $I_{Rush}$ | -         | -      | 1.5    | A    | (2)        |     |

Note (1)

1). White & V-Color :

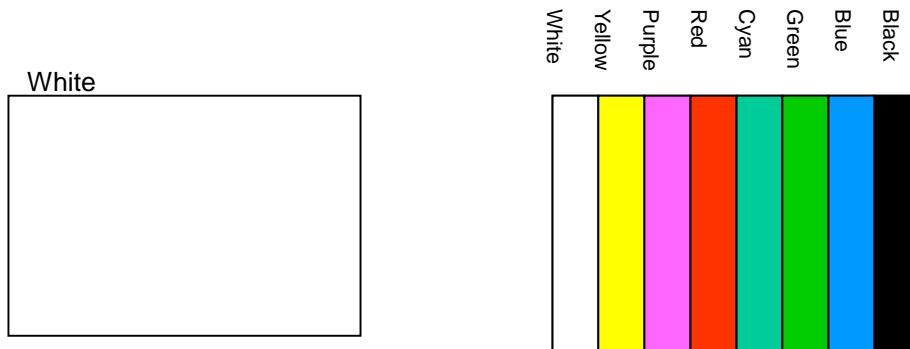

2). Mosaic : Dot checker image


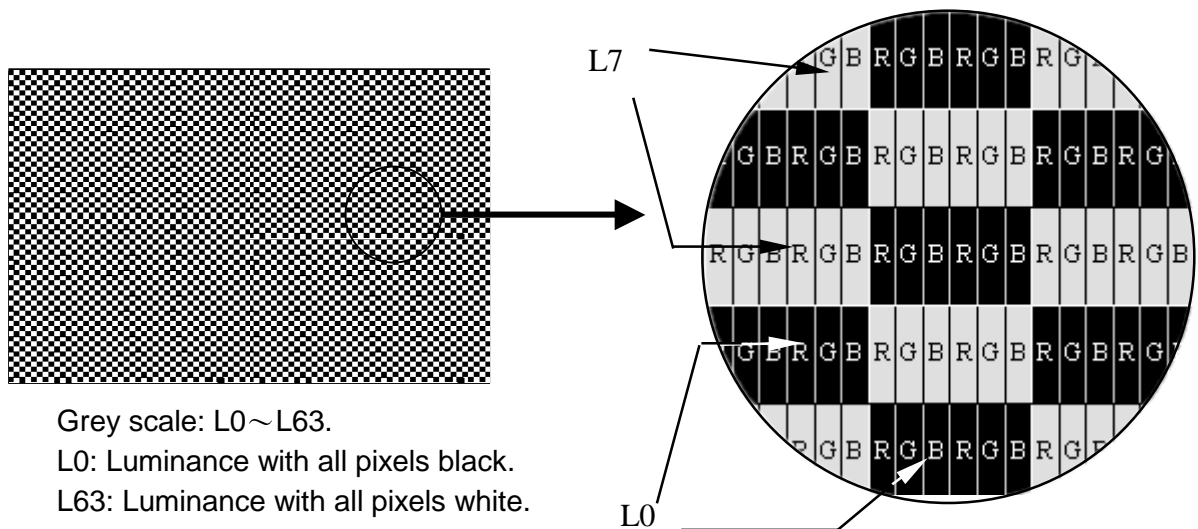


Grey scale: L0~L63.  
 L0: Luminance with all pixels black.  
 L63: Luminance with all pixels white.



|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 17 / 33 |
| Document No.   |  | Revision | 1.0     |

**Note (2) Input Rush Current measurement condition**

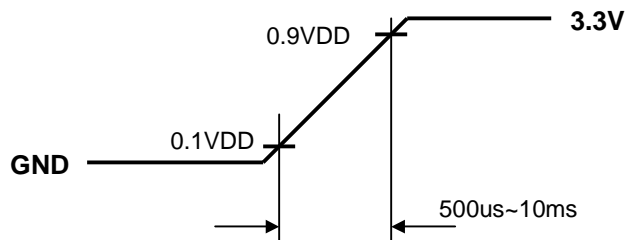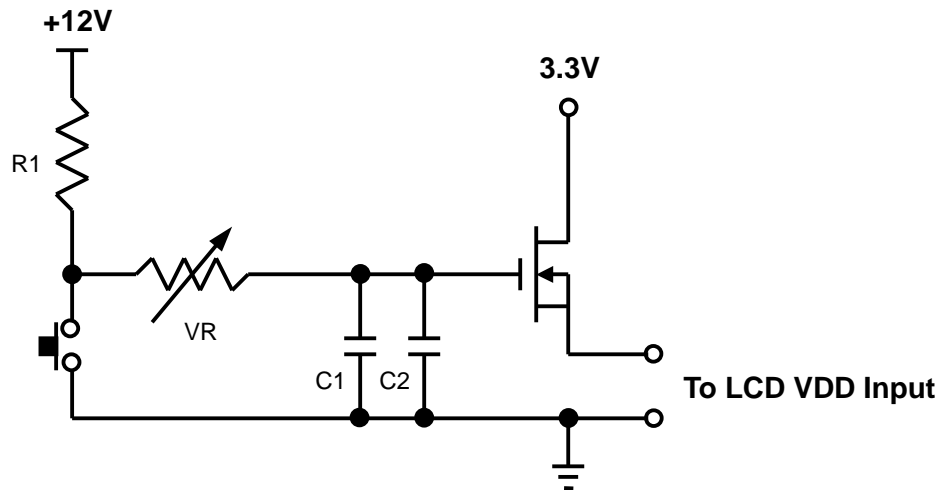


|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 18 / 33 |
| Document No.   |  | Revision | 1.0     |

## 6.2 Back-Light Unit

The back-light system is an edge-lighting type with 1 CCFL(Cold Cathode Fluorescent Lamp). The characteristics of the lamp is shown in the following tables.

| Item                     | Symbol | Min.   | Typ. | Max. | Unit    | Note            |
|--------------------------|--------|--------|------|------|---------|-----------------|
| Lamp current             | IL     | 3.0    | 6.5  | 7.5  | mA(rms) | (1)(6)          |
| Lamp voltage             | VL     | -      | 750  | -    | V(rms)  | (6) $I_L=6.5mA$ |
| Frequency                | fL     | 30     | -    | 80   | KHz     | (2)             |
| Operating lamp life time | Hr     | 15,000 | —    | —    | Hour    | (3)             |
| Startup voltage          | Vs     | TBD    | —    | —    | V(rms)  | (4)(5)at 25°C   |
|                          |        | TBD    |      |      |         | (4)(5)at 0°C    |

Note (1) Lamp current is measured with current meter for high frequency as shown below. Specified valued are for single lamp.

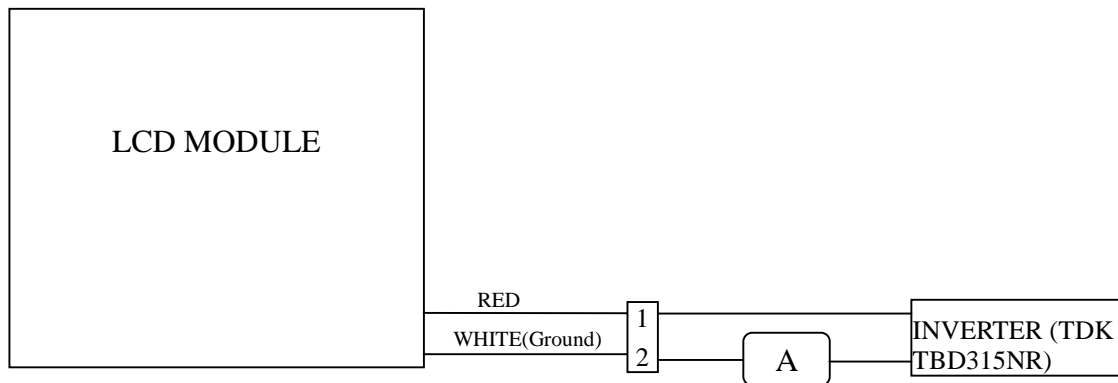

Note (2) Lamp frequency may produce interference with horizontal synchronous frequency and this may cause ripple noise on the display. Therefore lamp frequency shall be kept away from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

\*Suggest the inverter frequency avoid  $f_L=51\sim 59KHz$

Note (3) Lamp life time (Hr) can be defined as the time in which it continues to operate under the condition :  $T_a=25\pm 3^\circ C$ , typical IL value indicated in the above table and  $f_L=52kHz$  until the brightness becomes less than 50%.


Note (4) CCFL inverter should be able to provide a voltage over specified value (Vs) in the above table. Lamp units need at least Vs value shown above to ignition.

Note (5) The voltage over specified value (Vs) should be applied to the lamp more than 1 second after startup. Otherwise, the lamp may not be turned on. The used lamp current is the lamp typical current.

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 19 / 33 |
| Document No.   |  | Revision | 1.0     |

Note (6) The output voltage waveform and current waveform of the inverter must be symmetrical (Unsymmetrical ratio is less than 10%). Please do not use the inverter which has unsymmetrical voltage and current waveform, and spike waveform. The inverter design which can provide the best optical performance, power efficiency, and lamp life should under the following conditions.

- The asymmetry rate of the inverter waveform should be less than 10%.
- The distortion rate of the waveform should be within  $\sqrt{2} \pm 10\%$ .
- The inverter output waveform should be better similar to the ideal sine wave.

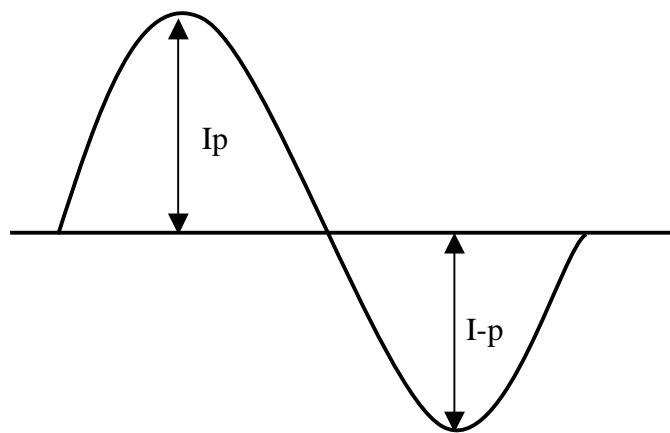


$$\text{Asymmetry rate} = \frac{|I_p - I-p|}{I_{rms}} \times 100\%$$

$$\text{Distortion rate} = \frac{I_p \text{ (or } I-p)}{I_{rms}}$$

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 20 / 33 |
| Document No.   |  | Revision | 1.0     |

### 6.3 Switching Characteristics for LVDS Receiver


| Item                              | Symbol     | Min.               | Typ.  | Max.                 | Unit    | Conditions                  |
|-----------------------------------|------------|--------------------|-------|----------------------|---------|-----------------------------|
| Differential Input High Threshold | $V_{th}$   | —                  | —     | 100                  | mV      | $V_{CM}=1.2V$               |
| Differential Input Low Threshold  | $V_{tl}$   | -100               | —     | —                    | mV      |                             |
| Input Current                     | $I_{IN}$   | —                  | —     | $\pm 10$             | $\mu A$ | $V_{IN}=1.75V, V_{DD}=3.6V$ |
|                                   |            | —                  | —     | $\pm 10$             | $\mu A$ | $V_{IN}=0.8V, V_{DD}=3.6V$  |
| Input Voltage Range(Signal ended) | $V_{IN}$   | $1.1-( V_{ID} )/2$ | —     | $1.375+( V_{ID} )/2$ | V       |                             |
| Differential input Voltage        | $ V_{ID} $ | 250                | —     | 450                  | mV      |                             |
| Common Mode Voltage Offset        | $V_{CM}$   | 1.1                | —     | 1.375                | V       |                             |
| Clock Frequency                   | $f_c$      | —                  | 88.75 | 106.5                | MHz     |                             |
| LVDS Skew Margin                  | $t_{RSKM}$ | —                  | —     | 400                  | pS      | At $f_c=88.75MHz$           |
| LVDS Input Clock Jitter Tolerance | —          | —                  | —     | $\pm 2.5$            | %       | center spread               |

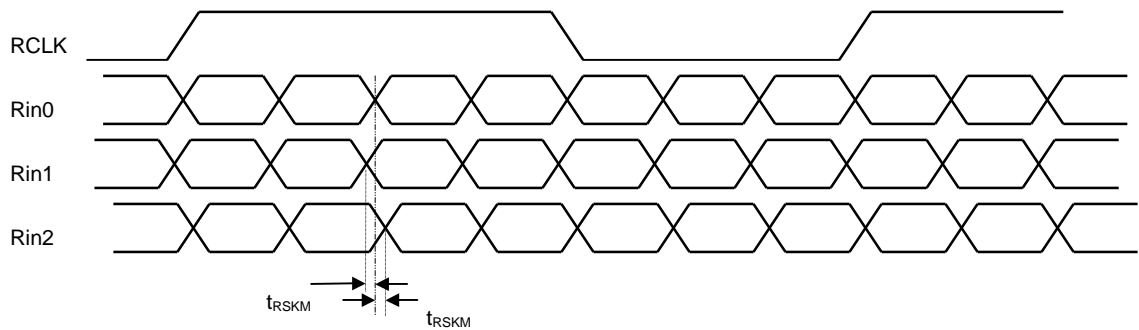

LVDS Receiver skew margin

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 21 / 33 |
| Document No.   |  | Revision | 1.0     |

### 6.4 Bit Mapping & Interface Definition

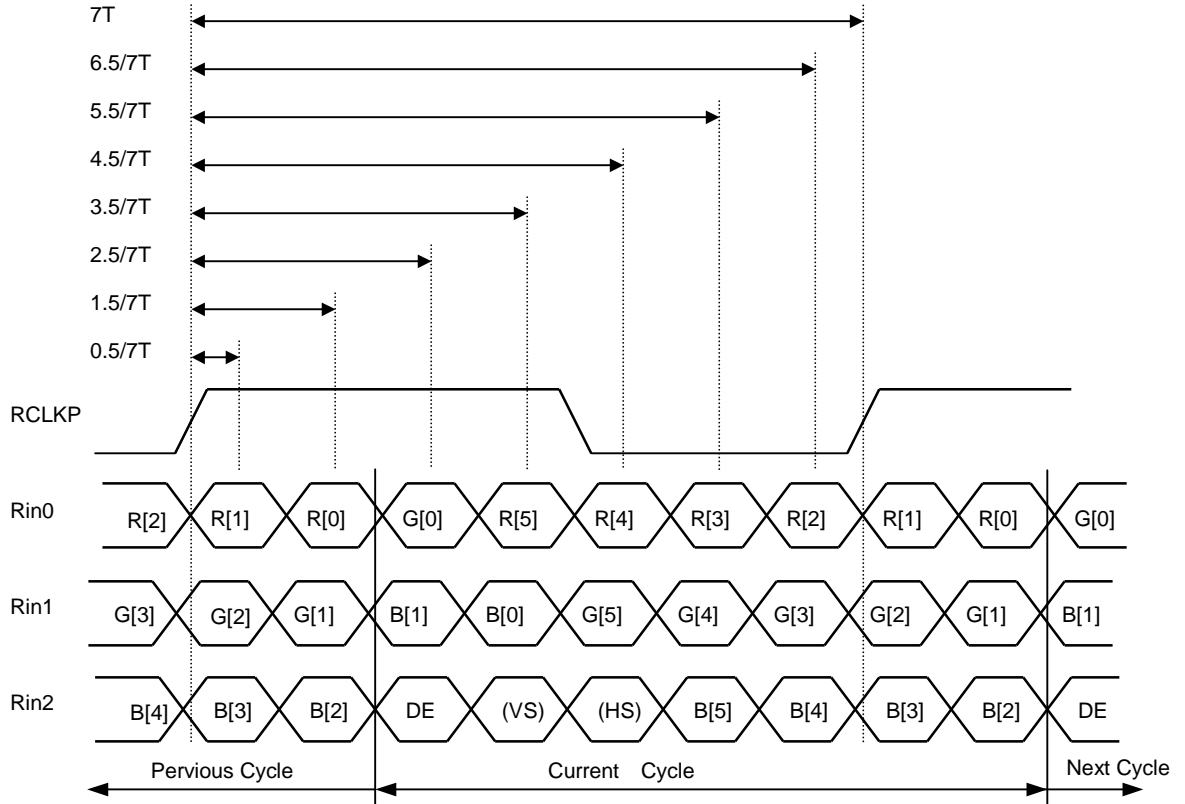

**Bit Mapping & Timing Definition**

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 22 / 33 |
| Document No.   |  | Revision | 1.0     |


### 6.5 Interface Timing ( DE mode) <sup>1)2)3)4)5)6)</sup>

| Item                     | Symbol  | Min. | Typ.  | Max.  | Unit |
|--------------------------|---------|------|-------|-------|------|
| V-Total Time             | t1      | -    | 926   | 934   | line |
| Vertical Display Time    | t2      | -    | 900   | -     | line |
| Vertical Blanking Time   | t3      | -    | 26    | 34    | line |
| H-Total Time             | t4      | -    | 1600  | 1904  | CLK  |
| Horizontal Display Time  | t5      | -    | 1440  | -     | CLK  |
| Horizontal Blanking Time | t6      | -    | 160   | 464   | CLK  |
| Clock Frequency          | t7(CLK) | -    | 88.75 | 106.5 | MHz  |


(frame rate=60Hz)

#### Timing Diagram of Interface Signal (DE mode)

(1)Vertical

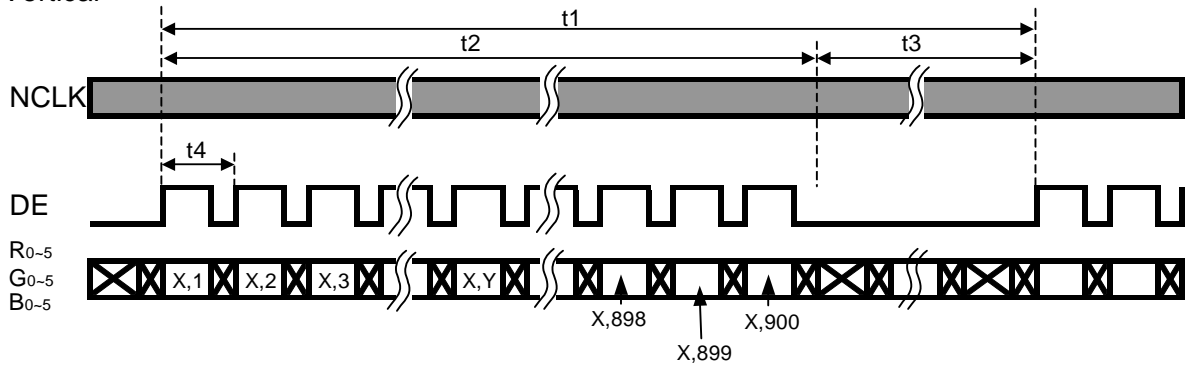


(2)Horizontal

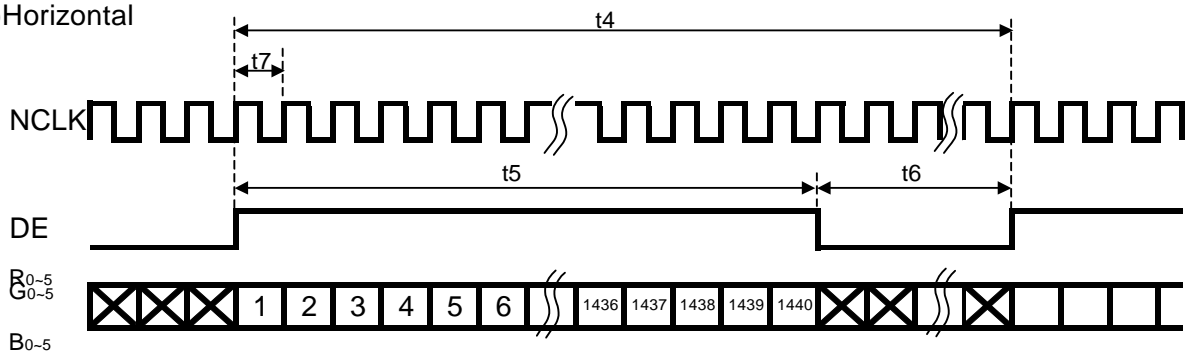

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 23 / 33 |
| Document No.   |  | Revision | 1.0     |

### 6.6 Power ON/OFF Sequence

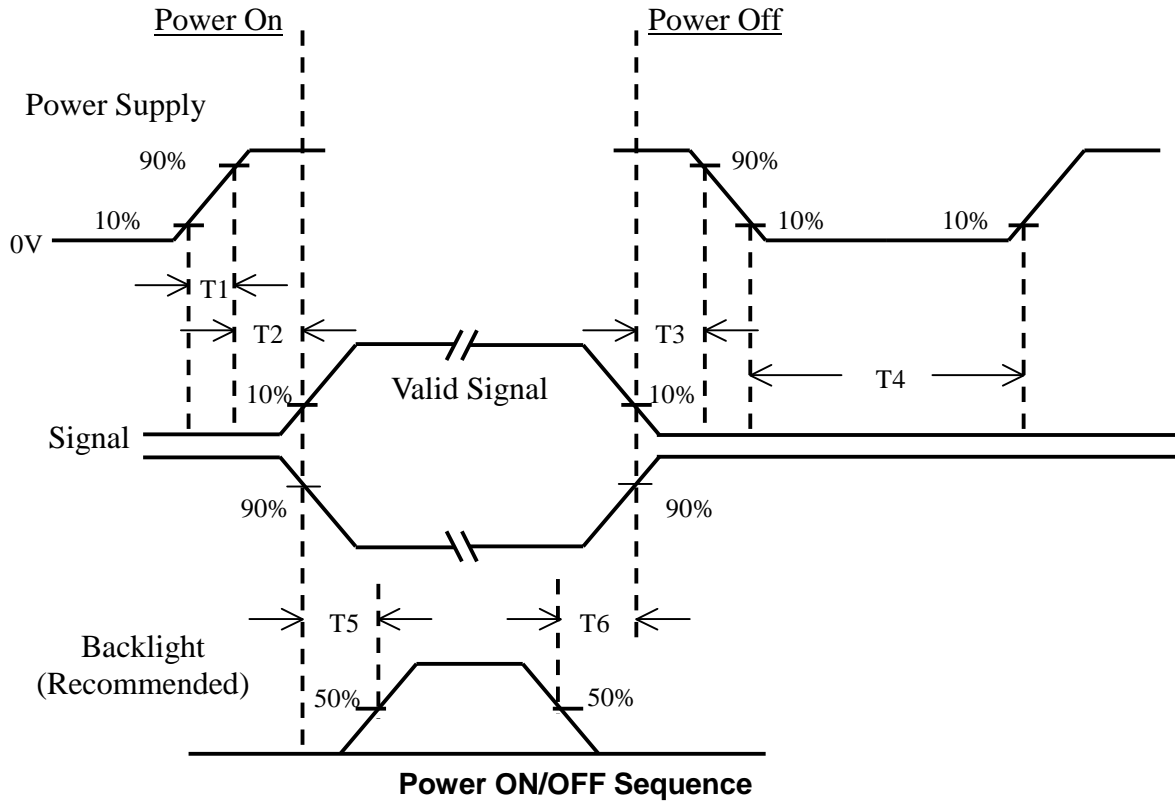

$$500 \text{ usec} < T1 \leq 10 \text{ msec}$$

$$0 < T2 \leq 50 \text{ msec}$$

$$0 < T3 \leq 50 \text{ msec}$$

$$200 \text{ ms} \leq T4$$

Back-light:

$$200 \text{ ms} \leq T5$$

$$200 \text{ msec} < T6$$

Note (1) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.


(2) In case of  $V_{DD} = \text{off level}$ , please keep the level of input signal on 0 voltage.

(3) T4 should be measured after the module has been fully discharged between power off and on period.

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 24 / 33 |
| Document No.   |  | Revision | 1.0     |

### 7.0 OUTLINE DIMENSION

Unit : mm

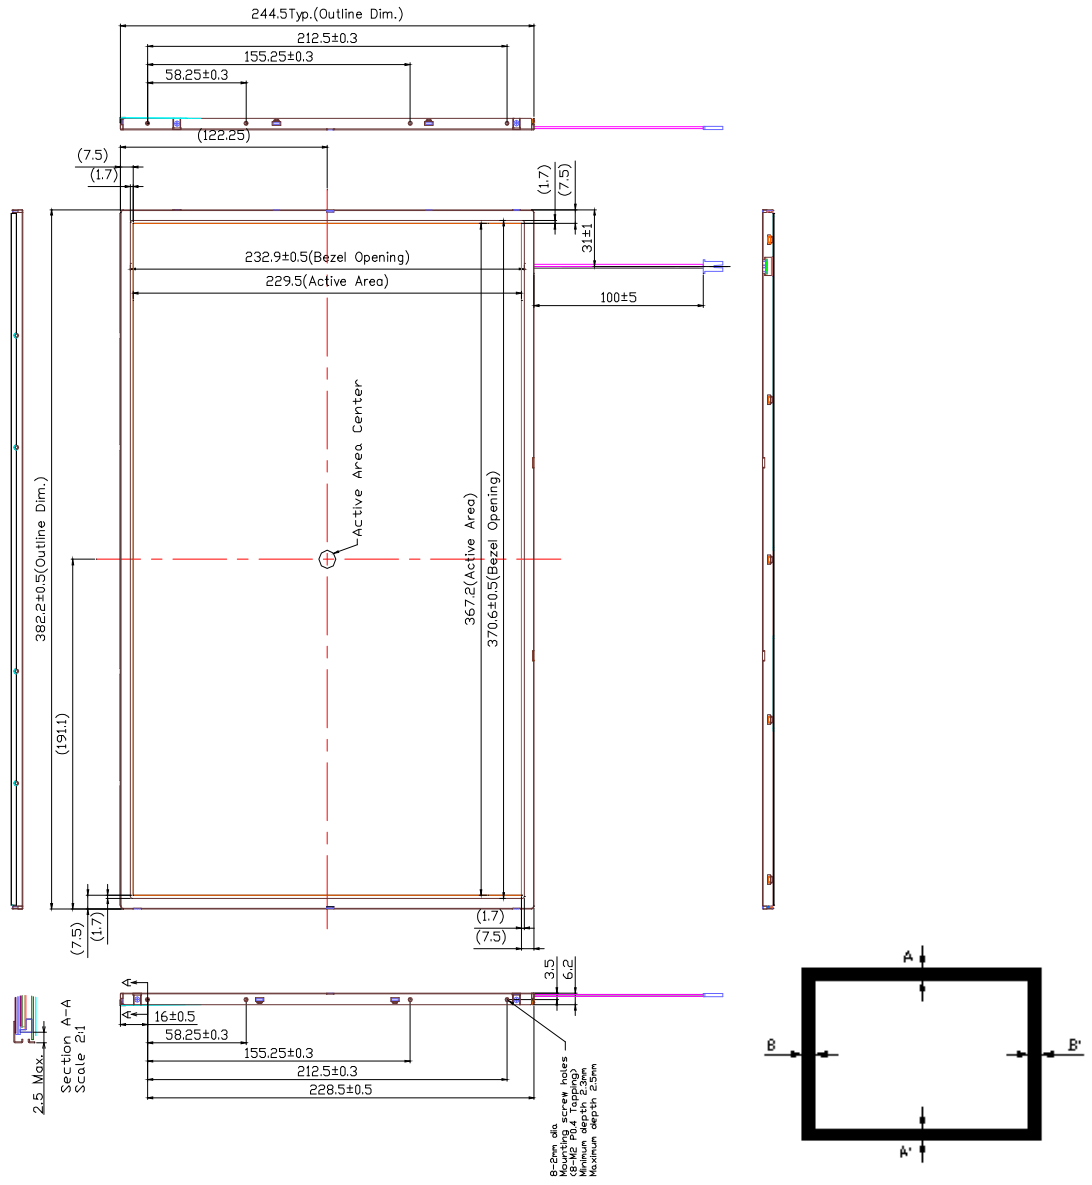

BM Assembly Tolerance


$$|A-A'| \leq 1.0 \text{ (mm)}$$

$$|B-B'| \leq 1.0 \text{ (mm)}$$



|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 25 / 33 |
| Document No.   |  | Revision | 1.0     |


### 7.2 Back View Outline Dimension

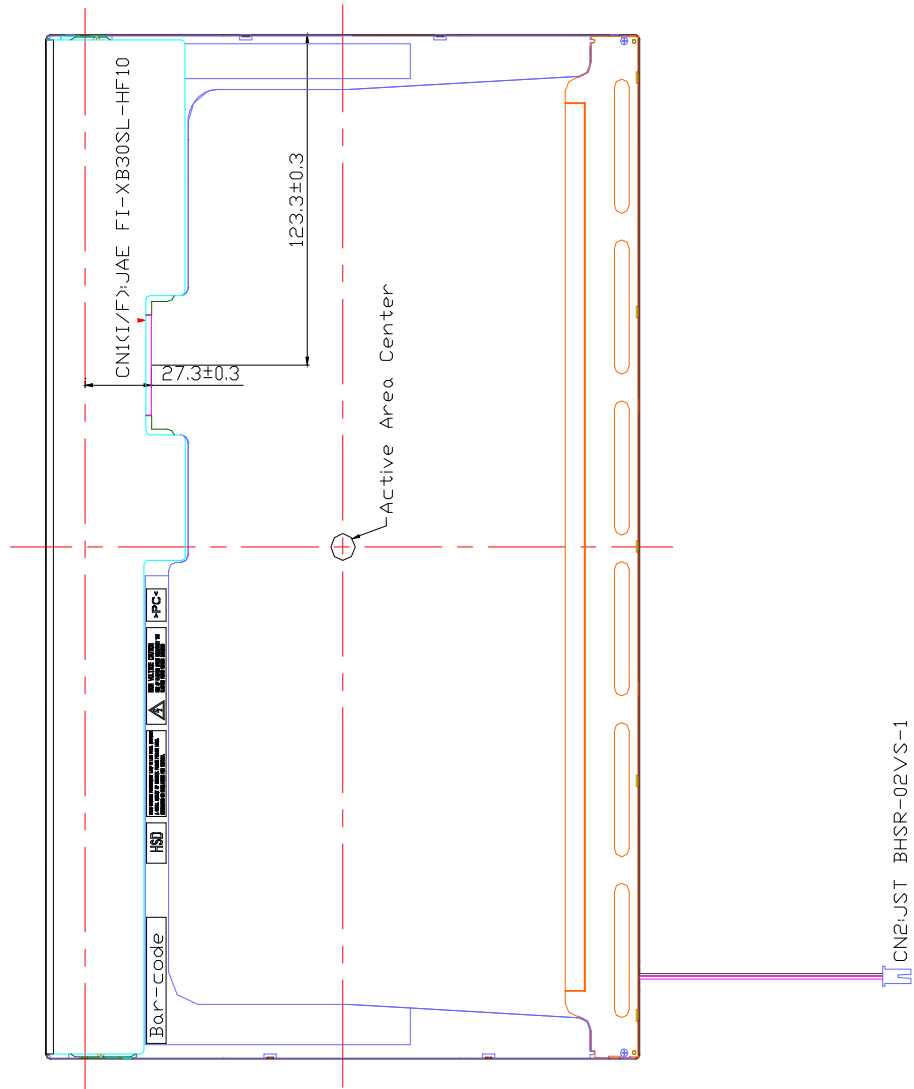

|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 26 / 33 |
| Document No.   |  | Revision | 1.0     |

## 8.0 LOT MARK

### 8.1 Lot Mark



code 1,2,3,4,5,6: HannStar internal flow control code.

code 7: production location.

code 8: production year.

code 9: production month.

code 10,11,12,13,14,15: serial number.

#### Note (1) Production Year

|      |      |      |      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|------|------|------|
| Year | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 |
| Mark | 9    | 0    | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    |

#### Note (2) Production Month


|       |      |      |      |      |      |      |      |      |      |      |      |      |
|-------|------|------|------|------|------|------|------|------|------|------|------|------|
| Month | Jan. | Feb. | Mar. | Apr. | May. | Jun. | Jul. | Aug. | Sep. | Oct. | Nov. | Dec. |
| Mark  | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | A    | B    | C    |

### 8.2 Location of Lot Mark

(1) The label is attached to the backside of the LCD module.

(2) This is subject to change without prior notice.

(3) "EDID.XX" ;The EDID Version tend to change if EDID content is modified.

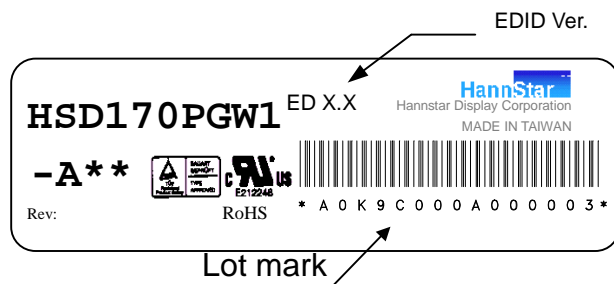



|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 27 / 33 |
| Document No.   |  | Revision | 1.0     |

**9.0 PACKAGE SPECIFICATION**

**9.1 packing form**

- (1) package quantity in one carton: 20 pieces.
- (2) carton size: TBD

**9.2 packing assembly drawings**



|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 28 / 33 |
| Document No.   |  | Revision | 1.0     |

**10.0 GENERAL PRECAUTION**

**10.1 Use Restriction**

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

**10.2 Disassembling or Modification**

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

**10.3 Breakage of LCD Panel**

- 10.3.1 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.
- 10.3.2 If liquid crystal contacts mouth or eyes, rinse out with water immediately.
- 10.3.3 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.
- 10.3.4 Handle carefully with chips of glass that may cause injury, when the glass is broken.

**10.4 Electric Shock**

- 10.4.1 Disconnect power supply before handling LCD module.
- 10.4.2 Do not pull or fold the CCFL cable.
- 10.4.3 Do not touch the parts inside LCD modules and the fluorescent lamp's connector or cables in order to prevent electric shock.

**10.5 Absolute Maximum Ratings and Power Protection Circuit**

- 10.5.1 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.
- 10.5.2 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.
- 10.5.3 It's recommended to employ protection circuit for power supply.

**10.6 Operation**

- 10.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.
- 10.6.2 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.
- 10.6.3 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.



|                |  |          |         |
|----------------|--|----------|---------|
| Document Title | HSD170PGW1-A Tentative Product Information | Page No. | 29 / 33 |
| Document No.   |  | Revision | 1.0     |

10.6.4 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.

10.6.5 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

**10.7 Mechanism**

Please mount LCD module by using mouting holes arranged in four corners tightly.

**10.8 Static Electricity**

10.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.

10.8.2 Because LCD module use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge.

Persons who handle the module should be grounded through adequate methods.

**10.9 Strong Light Exposure**

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

**10.10 Disposal**

When disposing LCD module, obey the local environmental regulations.