



Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	1 / 25
Document No.		Revision	2.0

To : Solomon

Date : Dec., 19, 2012

Formal Specification

Model : HSD190MEN6 - A**

- Note: 1. The information contained herein is preliminary and may be changed without prior noticed.
2. Please contact HannStar Display Corp. before designing your product based on this module specification.
3. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.



Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	2 / 25
Document No.		Revision	2.0

Record of Revisions

Rev.	Date	Sub-Model	Description of change
1.0	Jun. 26,2012	A**	HSD 190MEN6-A** formal specification was 1 st issued
1.1	Aug 17, 2012	A**	P29 Add supplier code for HP.
1.2	Sept 6, 2012	A**	P15 Update current of power supply. P20 Update outline drawing. P30 Add glass surface temperature information (for Dell only). P31 Update interface timing (for Dell only).
1.3	Sept18, 2012	A**	P12 Update 4.2 LED light bar connector description. P15 Update 6.1 min. value of frequency.
2.0	Nov 8, 2012	A**	P6 Add note information.



Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	3 / 25
Document No.		Revision	2.0

Contents

1.0	General Descriptions	p.4
2.0	Absolute Maximum Ratings	p.5
3.0	Optical Characteristics	p.7
4.0	Block Diagram	p.11
5.0	I/O Connection Pin Assignment	p.14
6.0	Electrical Characteristics	p.15
7.0	Outline Dimension	p.21
8.0	Lot Mark	p.25
9.0	Package Specification	p.26
10.0	General Precaution	p.27

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	4 / 25
Document No.		Revision	2.0

1.0 GENERAL DESCRIPTIONS

1.1 Introduction

HannStar Display model **HSD190MEN6-A*** is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, the voltage reference, common voltage, DC-DC converter, column, and row driver circuit. This TFT LCD has a 19-inch diagonally measured active display area with SXGA resolution (1024 vertical by 1280 horizontal pixel array) .

1.2 Features

- 19" SXGA TFT LCD Panel
- LED Backlight System
- Supported SXGA (V:1024 lines, H:1280 pixels) Resolution
- Supported to 75Hz Refresh Rate
- LCD Timing Controller
- RoHS Compliance
- VESA Compatible
- Halogen Free

1.3 Applications

- Desktop Monitors
- Display terminals for AV applications
- Monitors for industrial applications

1.4 General information

Item	Specification		Unit
Outline dimension	396 * 324 * 9.9(Typ)		mm
Display area	376.32 (H) x 301.056 (V) (19.0" diagonal)		mm
Number of Pixel	1280(H) x 1024(V)		Pixels
Pixel pitch	0.294(H) x 0.294(V)		mm
Pixel arrangement	RGB Vertical Stripe		
Display color	16.7M (6-bits+Hi FRC)		
Color temperature	6500K		
Display mode	Normally white		
Surface treatment	Antiglare, Hard-Coating (3H)		
Weight	1600		g
Back-light	White LED		
Input signal	2-ch LVDS		
Power consumption	System	3.6(Typ.), 4.2(Max.) L0 pattern	W
	B/L	11.83 (Max.)	

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	5 / 25
Document No.		Revision	2.0

Remark(1): There are two functions, brightness and contrast tuning, to let luminance to 125cd/m2 in OSD. OSD shouldn't restrict the panel's G-T curve for brightness to be 125cd/m2. The higher contrast, the higher angular uniformity. That is to say, if OSD want to tune the panel's luminance to 125 cd/m2, the suitable way is to only tune the brightness function. And if tuning the brightness function to 125 cd/m2, it would be better only to tuning the inverter, not the gray level.

1.5 Mechanical Information


Item		Min.	Typ.	Max.	Unit
Module Size	Horizontal(H)	395.5	396.0	396.5	mm
	Vertical(V)	323.5	324.0	324.5	mm
	Depth(D)		9.9		mm
Weight (without inverter)		1400	1600	1800	g
Torque of customer screw hole		--	--	3.0	Kgf*Cm

2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Absolute Rating of Environment

Item	Symbol	Min.	Max.	Unit	Note
Storage temperature	T _{STG}	-20	60	°C	
Operating temperature	T _{OPR}	0	50	°C	(1)
Vibration (non-operating)	V _{NOP}	--	1.5	G	(2)
Shock (non-operating)	S _{NOP}	--	70	G	(3)
Storage humidity	H _{STG}	10	90	%RH	(3)
Operating humidity	H _{OP}	10	90	%RH	(4)
Low pressure (operating)	P _{LOP}	697	--	HPa	(5)
Low pressure (non-operating)	P _{LNOP}	116	--	HPa	(6)

Note 1 (1)Storage /Operating temperature

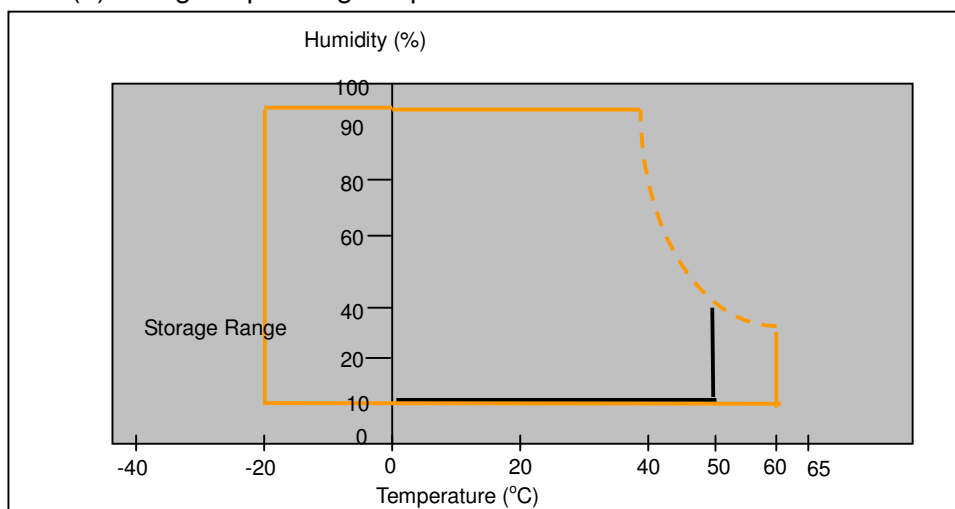

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	6 / 25
Document No.		Revision	2.0

(2) 5-500-5Hz sine wave, X, Y, Z each directions, 30 min/cycle.

(3) 11ms, $\pm X$, $\pm Y$, $\pm Z$ direction, one time each. For this shock test,

It is necessary to fill the silicon rubber between the shock jig as buffer.

(4) Max wet bulb temp. $\approx 39^{\circ}\text{C}$

(5) 2 hrs. (10000 feet)

(6) 24hrs. (50000 feet)

Note 2: There is no display function NG issue occurred, all the cosmetic specification is judged before the reliability stress.

2.2 Electrical Absolute Rating:

2.2.1 TFT LCD Module:

Item	Symbol	Min.	Max.	Unit.	Note
Power supply Voltage	VDD	-0.3	5.5	V(DC)	(1)(2)

2.2.2 Back Light Unit:

Item	Symbol	Typ.	Max.	Unit	Note
LED current	I_F	60	65	mA	(1)(2)(3)
LED Voltage	V_F	3.4	3.6	Volt	(1)(2)(3)

Note: (1) Permanent damage may occur to the LCD module if beyond this specification.

Functional operation should be restricted to the conditions described under Normal Operating Conditions.

(2) To exceed 65mA, life time accelerate drop down.

(3) Within $T_a = 25 \pm 2^{\circ}\text{C}$

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	7 / 25
Document No.		Revision	2.0

3.0 OPTICAL CHARACTERISTICS

3.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast		CR	$\Theta = 0^\circ$ $\phi = 0^\circ$ Normal viewing angle	700	1000	--		(1)(2)
Response time	Rising	TR +TF		--	5	10	msec	(1)(3)
	Falling							
White luminance (center of screen)		Y_L		200	250	--	cd/m ²	(1)(4)
Color chromaticity (CIE1931)	Red	R _x		-0.03	0.643	+0.03		(1)(4)
		R _y			0.337			
	Green	G _x			0.322			
		G _y			0.637			
	Blue	B _x			0.152			
		B _y			0.049			
	White	W _x	0.313					
		W _y	0.329					
Viewing angle	Hor.	Θ_L	CR>10	75	85	--		
		Θ_R		75	85	--		
	Ver.	Θ_H		70	80	--		
		Θ_L		70	80	--		
Viewing angle	Hor.	Θ_L	CR>5	75	85	--		
		Θ_R		75	85	--		
	Ver.	Θ_H		75	85	--		
		Θ_L		75	85	--		
Brightness uniformity		B _{UNI}	$\Theta = 0^\circ$ $\phi = 0^\circ$	75	--	--	%	(6)

3.2 Measuring Condition


- Measuring surrounding: dark room
- Each LED current is 60 mA
- V_{DD1}=5.0V, f_V=60Hz, f_{DCLK}=54MHz
- Surrounding temperature: 25±2°C
- 20min. Warm-up time.

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	8 / 25
Document No.		Revision	2.0

3.3 Measuring Equipment

- FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size: 20~21mm

Note (1) Definition of Viewing Angle:

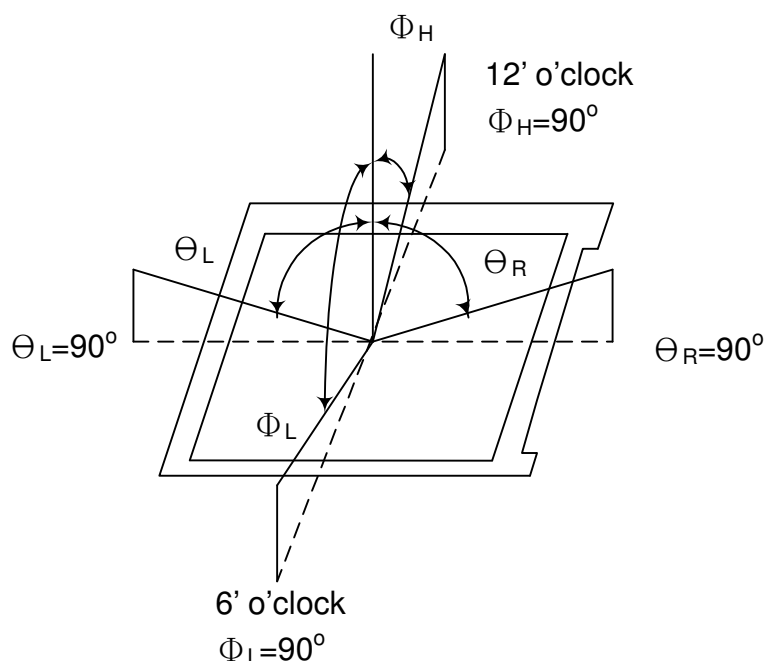


Note (2) Definition of Contrast Ratio(CR) :
measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white (L255)}}{\text{Luminance with all pixels black (L0)}}$$

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	9 / 25
Document No.		Revision	2.0

Note (3) Definition of Response Time: Sum of T_R and T_F

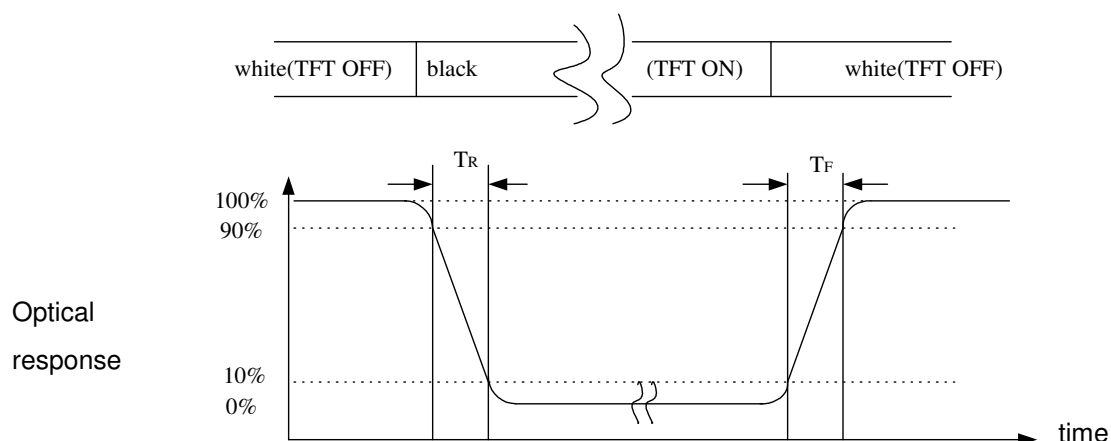


Note (4) Optical characteristic measurement setup

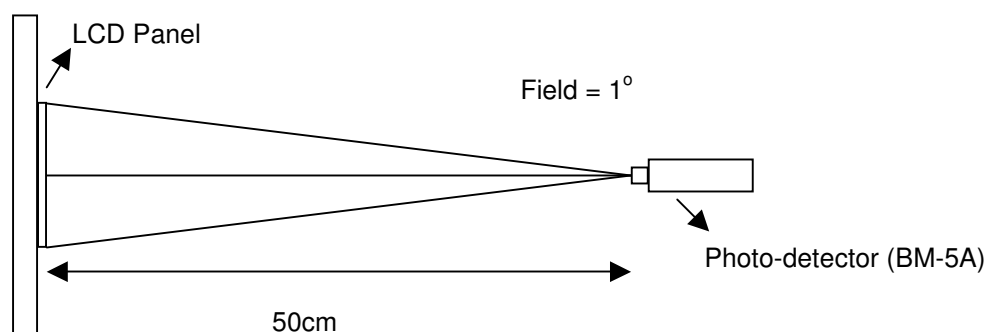

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	10 / 25
Document No.		Revision	2.0

Note (5) Definition of Center Luminance of White (center)

Center Luminance= Y1

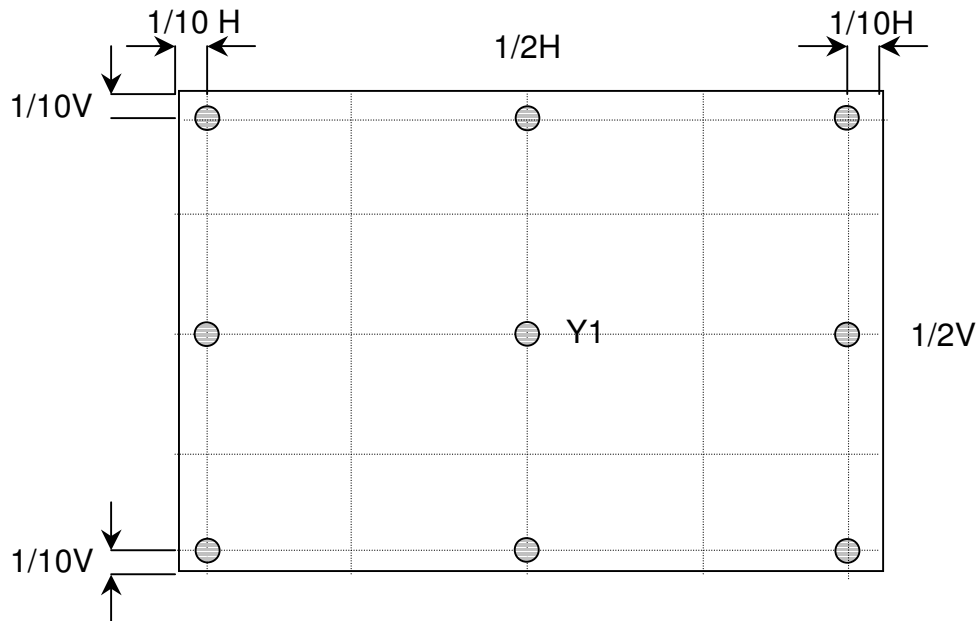


Note (6) Definition of brightness uniformity

$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 9 points})}{(\text{Max Luminance of 9 points})} \times 100\%$$

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	11 / 25
Document No.		Revision	2.0


4.0 BLOCK DIAGRAM

4.1 LCD Module Block Diagram:

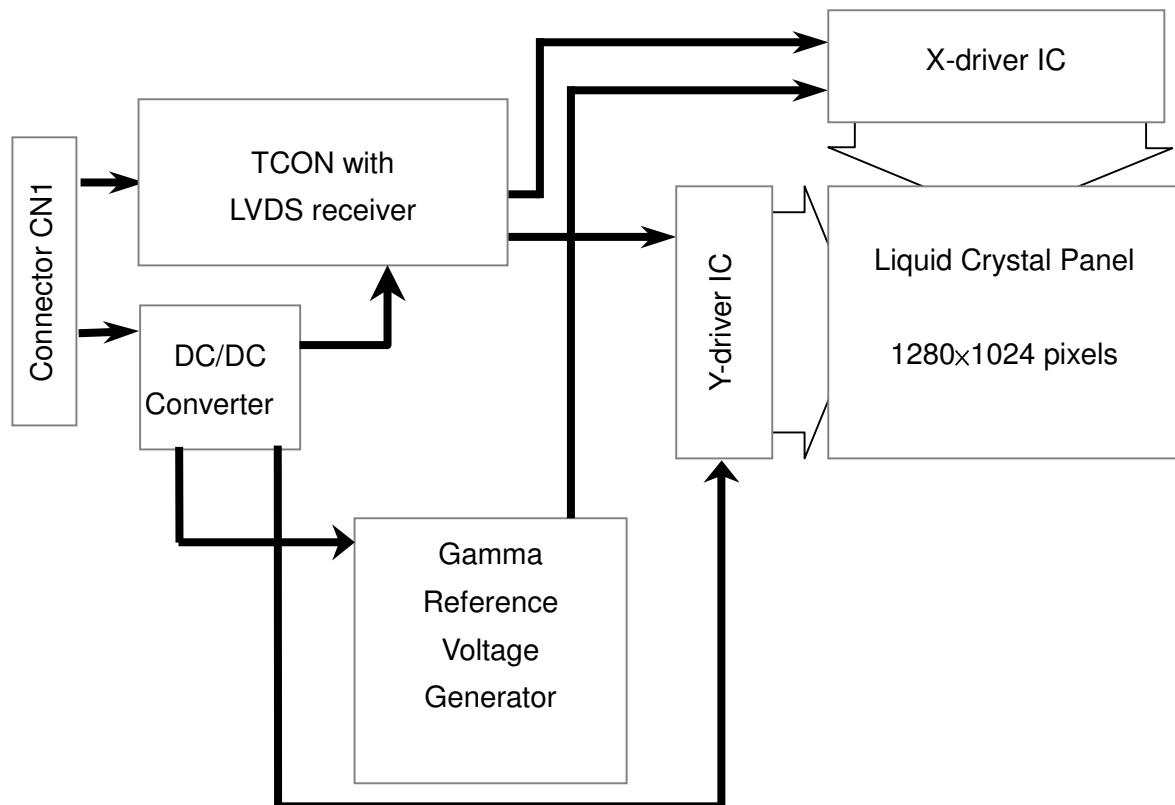


Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	12 / 25
Document No.		Revision	2.0

4.2 Back Light Unit

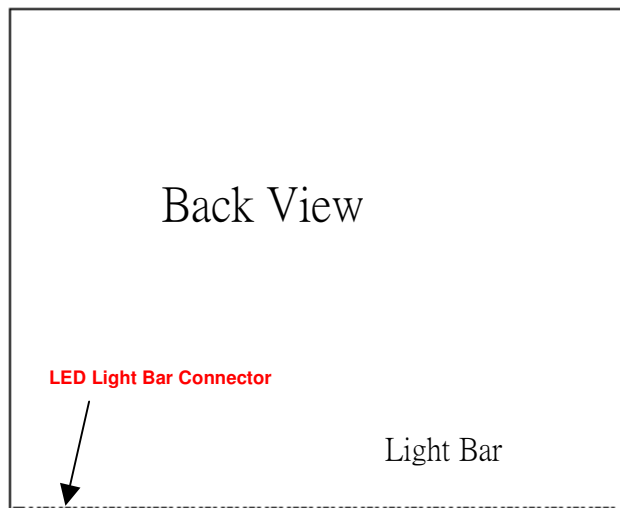

4.3 Pixel Format

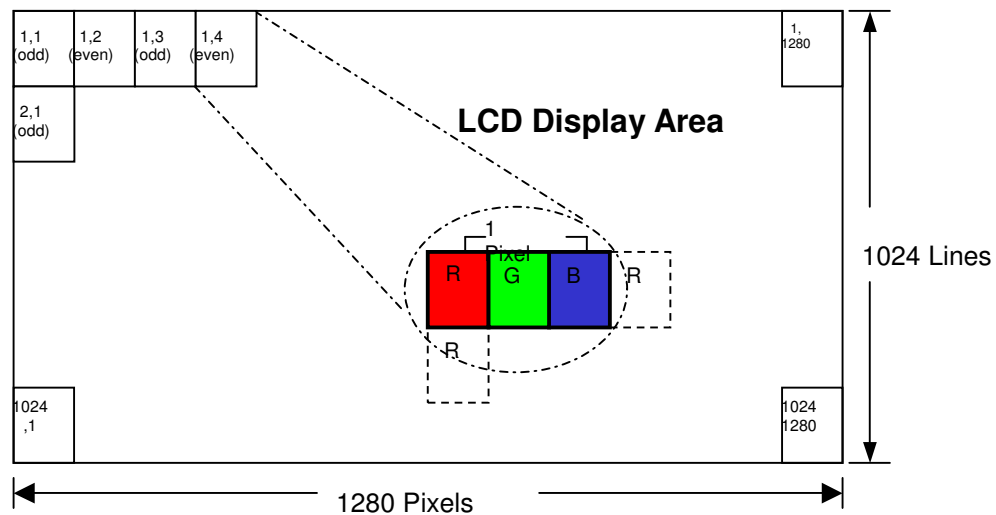

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	13 / 25
Document No.		Revision	2.0

4.4 Relationship Between Displayed Color and Input

	Display	MSB								LSB								MSB								LSB								Gray scale Level
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0									
Basic color	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-			
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	-				
	Green	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	L	L	L	L	-				
	Light Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	-				
	Red	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-				
	Purple	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	-				
	Yellow	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-				
	White	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	-				
Gray scale of Red	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0				
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1				
		L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2				
		:								:								:								L3...L251								
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L252				
		L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L253				
		L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L254				
	Red	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	Red L255				
Gray scale of Green	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0				
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L1				
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L2				
		:								:								:								L3...L251								
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L252				
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L253				
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L254				
	Green	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	L	L	L	L	L	L	Green L255				
Gray scale of Blue	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0				
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1				
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2				
		:								:								:								L3...L251								
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L252				
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	H	L	L	L	L	L253				
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	H	L	L	L	L	L254				
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	Blue L255					
Gray scale of White & Black	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0				
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L1				
		L	L	L	L	L	L	H	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L2				
		:								:								:								L3...L251								
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L252				
		L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L253				
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L254				
	White	H	H	H	H	H	H	H	H	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H							

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	14 / 25
Document No.		Revision	2.0

5.0 I/O CONNECTION PIN ASSIGNMENT

5.1 Interface Connector (30-pins, P-TWO 187098-30091, JAE FI-XB30SSRL-HF16 or equivalent)

Pin No.	Signal	Description
1	RxOIN0-	Negative LVDS differential data input (Odd data)
2	RxOIN0+	Positive LVDS differential data input (Odd data)
3	RxOIN1-	Negative LVDS differential data input (Odd data)
4	RxOIN1+	Positive LVDS differential data input (Odd data)
5	RxOIN2-	Negative LVDS differential data input (Odd data)
6	RxOIN2+	Positive LVDS differential data input (Odd data)
7	GND	Power ground
8	RxOCLKIN-	Negative LVDS differential clock input (Odd clock)
9	RxOCLKIN +	Positive LVDS differential clock input (Odd clock)
10	RxOIN 3-	Negative LVDS differential data input (Odd data)
11	RxOIN 3+	Positive LVDS differential data input (Odd data)
12	RxEIN0-	Negative LVDS differential data input (Even data)
13	RxEIN0+	Positive LVDS differential data input (Even data)
14	GND	Power ground
15	RxEIN1-	Positive LVDS differential data input (Even data)
16	RxEIN1+	Negative LVDS differential data input (Even data)
17	GND	Power ground
18	RxEIN2-	Negative LVDS differential data input (Even data)
19	RxEIN2+	Positive LVDS differential data input (Even data)
20	RxECLKIN-	Negative LVDS differential clock input (Even clock)
21	RxECLKIN +	Positive LVDS differential clock input (Even clock)
22	RxEIN3-	Negative LVDS differential data input (Even data)
23	RxEIN3+	Positive LVDS differential data input (Even data)
24	GND	Power ground
25	GND	Power ground
26	NC	No connection
27	NC	No connection
28	Power	Power +5V
29	Power	Power +5V
30	Power	Power +5V

5.2 LED Board Pin Assignment:

CN102: LED Power Source Connector (Entery Industrial Co., Ltd 3707K-Q06N-01R or equivalent)

Pin No	Symbol	Description
1	IRLED	Current out
2	IRLED	Current out
3	VLED	Voltage in
4	VLED	Voltage in
5	IRLED3	Current out
6	IRLED4	Current out


Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	15 / 25
Document No.		Revision	2.0

6.0 ELECTRICAL CHARACTERISTICS

6.1 TFT LCD Module:


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of power supply	V_{DD}	4.5	5.0	5.5	V	
Current of power supply	I_{DD0}	--	720	840	mA	(1)
Vsync frequency	f_V	50	60	76	Hz	(2)
Hsync frequency	f_H	53.3	64	80	KHz	
Frequency	f_{DCLK}	50	54	67.5	MHz	
Input rush current	I_{RUSH}	--	--	3.0	A	(3)

Note (1) $V_{DD} = 5.0V$, Black pattern (L0), Frame Rate 60Hz



Note (2) When f_V is too low, a flicker may be occurred on the display.

Note (3) Input Rush Current condition

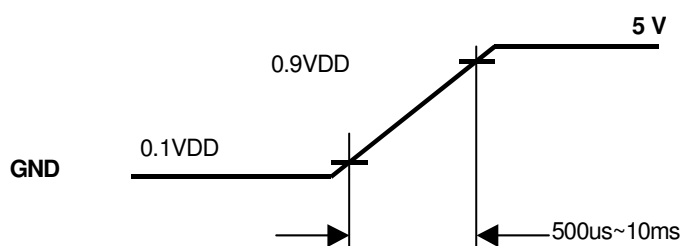

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	16 / 25
Document No.		Revision	2.0

6.2 Back-Light Unit

Parameter	Symbol	Min	Typ	Max	Units	Condition
LED Operation Current	I_F	---	60	65	mA	Ta=25°C
Light Bar Input Voltage	V_F	37.7	44.2	45.5	Volt	Ta=25°C
LED Power consumption	P_{LED}	---	10.608	11.83	Watt	Ta=25°C Note (1)
LED Life-Time	N/A	--	30,000	--	Hour	Ta=25°C $I_F=60mA$ Note (2)

Notes (1) The specified values are for a single LED lightbar.

Notes (2) The specified current is input LED chip 100% duty current.

Notes (3) Calculator value for reference $P=I_F \times V_F \times N$ (LED Parallel Qty')

Notes (4) The LED lifetime defines as the estimated time to 50% degradation of original luminance


Notes (5) For better LED light bar driving quality, it is recommended to utilize the adaptive boost converter with current balancing function to drive LED light-bar.

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	17 / 25
Document No.		Revision	2.0

6.3 Switching Characteristics for LVDS Receiver

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	V_{th}	—	—	+100	mV	$V_{CMLVDS}=1.25V$
Differential Input Low Threshold	V_{tl}	-100	—	—	mV	
Input Current	I_{IN}	-10	—	+10	μA	$V_{IN}=2.4V/0V$, $V_{DD}=3.6V$
Differential input Voltage	$ V_{ID} $	0.1	—	0.6	V	
Common Mode Voltage Offset	V_{CM}	1.15	—	1.35	V	
Clock Frequency	f_c	50	54	67.5	MHz	

Differential Signal Diagram

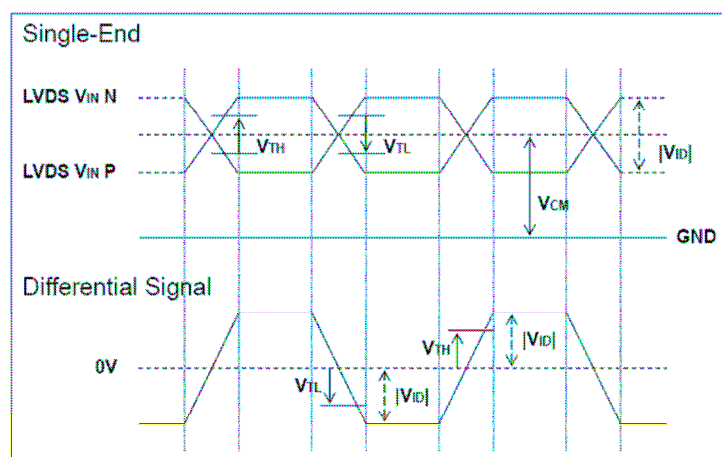


6.4 Interface Timing (DE mode)

Item	Symbol	Min.	Typ.	Max.	Unit
Frame Rate	--	50	60	76	Hz
Frame Period	t_1	1029	1066	1150	line
Vertical Display Time	t_2	1024	1024	1024	line
Vertical Blanking Time	t_3	5	42	126	line
1 Line Scanning Time	t_4	720	844	875	clock
Horizontal Display Time	t_5	640	640	640	clock
Horizontal Blanking Time	t_6	80	204	235	clock
Clock Rate	t_7	50	54	67.5	MHz


Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	18 / 25
Document No.		Revision	2.0

Timing Diagram of Interface Signal (DE mode)

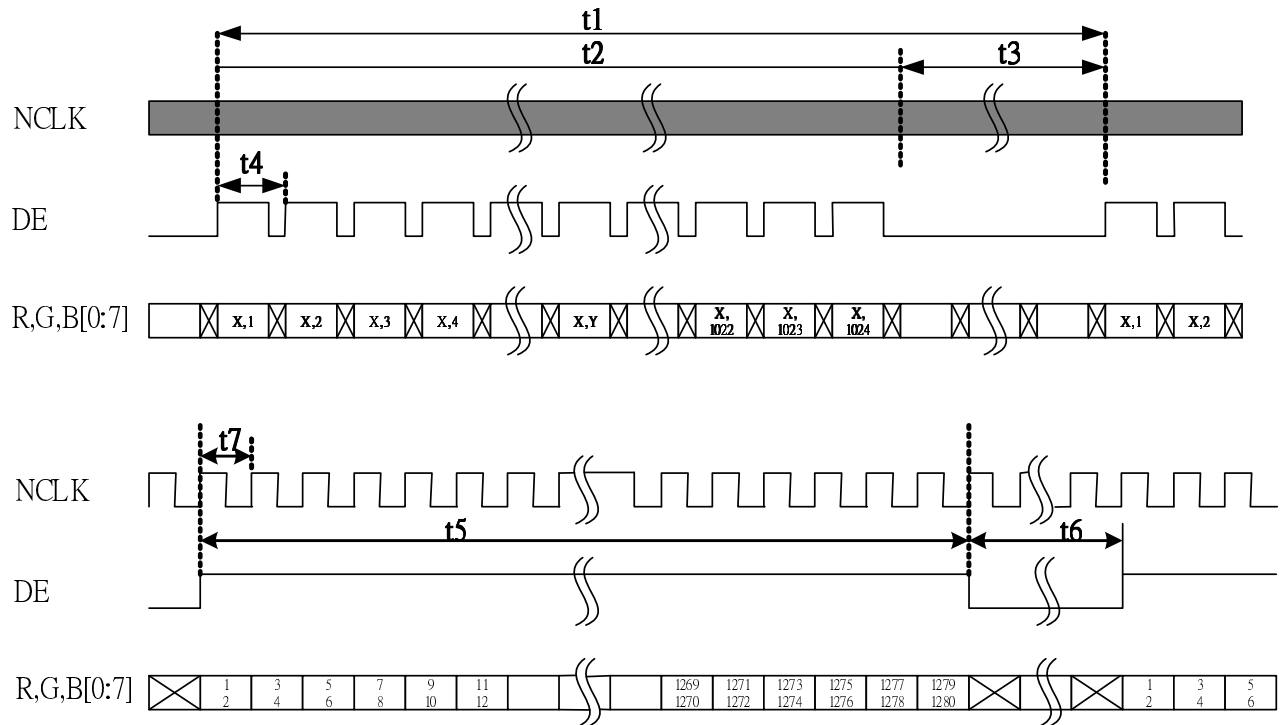

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	19 / 25
Document No.		Revision	2.0

6.5 Power On / Off Sequence :

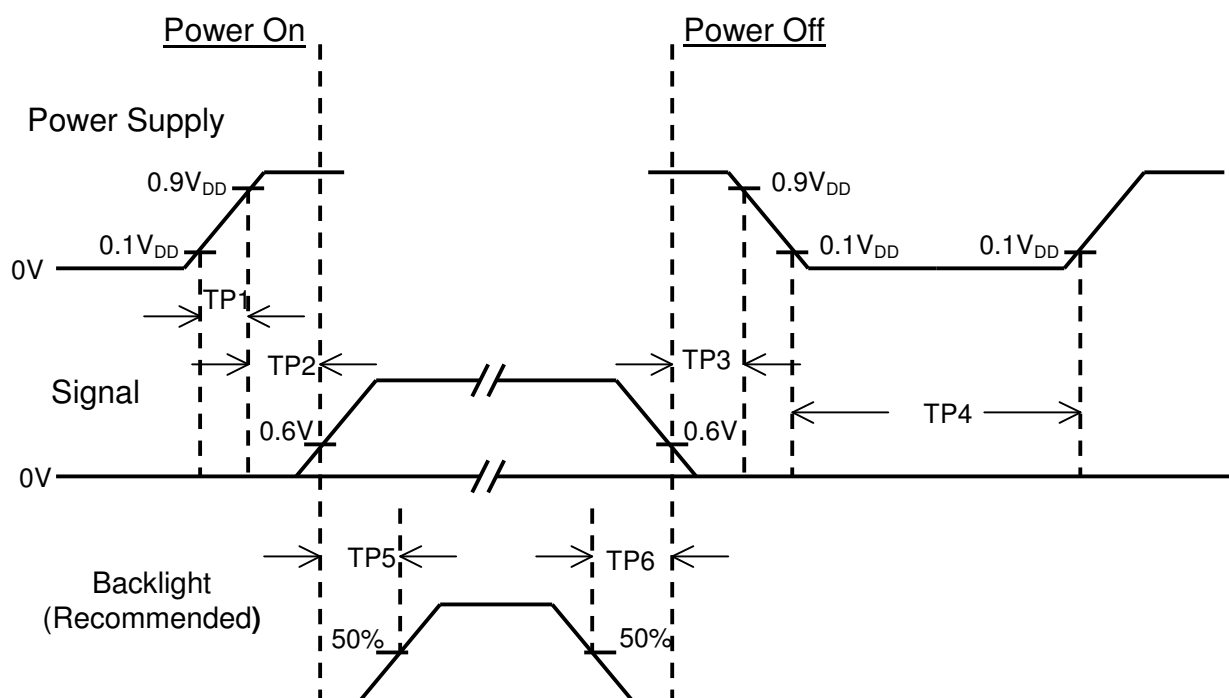

Item	Min.	Typ.	Max.	Unit	Remark
TP1	0.5	--	10	msec	
TP2	0	--	50	msec	
TP3	0	--	50	msec	
TP4	500	--	--	msec	
TP5	200	--	--	msec	
TP6	200	--	--	msec	

Note : (1) The supply voltage of the external system for the module input should be the same as the definition of V_{DD}.

(2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.

(3) In case of V_{DD} = off level, please keep the level of input signal on the low or keep a high impedance.


(4) TP4 should be measured after the module has been fully discharged between power off and on period.

(5) Interface signal shall not be kept at high impedance when the power is on.

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	20 / 25
Document No.		Revision	2.0


7.0 OUTLINE DIMENSION

7.1 190MEN6-A Front View:

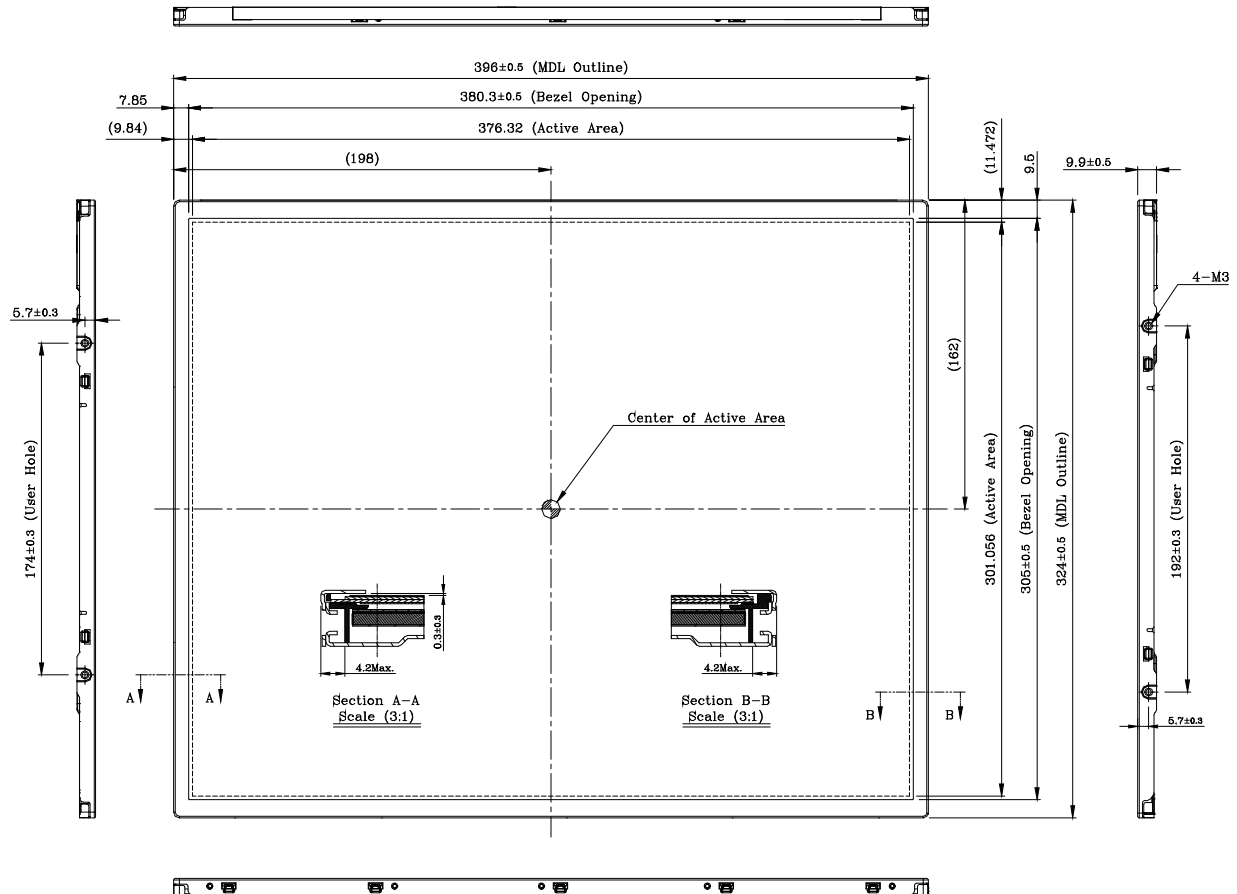

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	21 / 25
Document No.		Revision	2.0

7.2 190MEN6-A Back View:

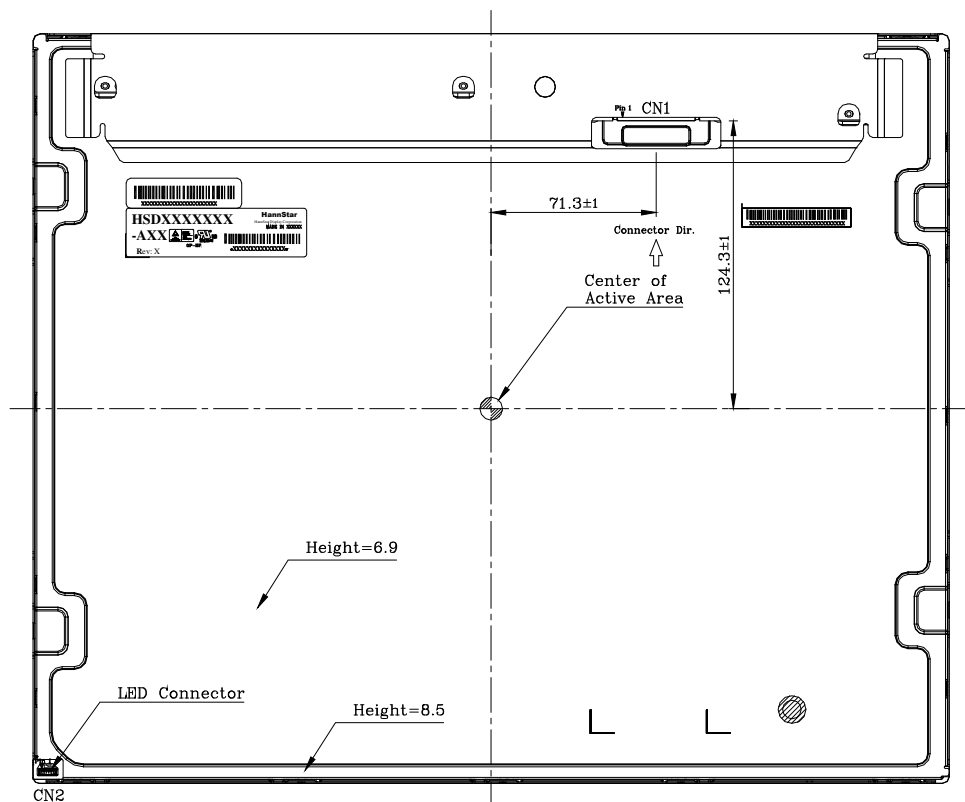

1. Backlight: LED Light Source
2. I/F Connector (CN1) Specification:
P-TWO 187098-30091 or Equivalent
3. LED Light Bar Connector (CN2) Specification:
Entry Industrial 3707K-Q06N-01R or Equivalent
4. User Mounting Torque Spec: 3 Kgf-cm Max.
5. Unspecified Tolerance is ± 0.5 mm

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	22 / 25
Document No.		Revision	2.0

8.0 LOT MARK

8.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

code 1,2,3,4,5,6: HannStar internal flow control code.

code 7: production location.

code 8: production year.

code 9: production month.

code 10,11,12,13,14,15: serial number.

Note (1) Production Year: Code 8 is defined by the last number of the year. For example:

Year	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
Mark	6	7	8	9	0	1	2	3	4	5

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C


8.2 Location of Lot Mark

(1) The label is attached to the backside of the LCD module.

(2) This is subject to change without prior notice.



Lot mark

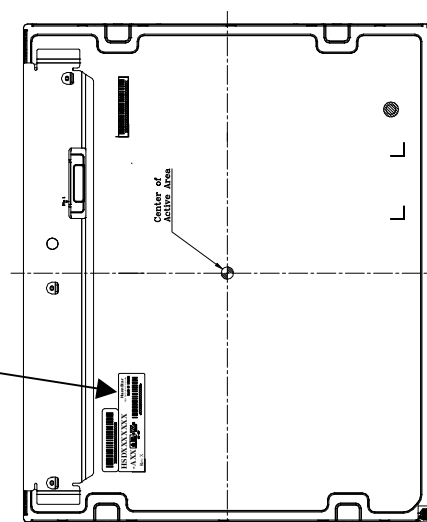


Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	23 / 25
Document No.		Revision	2.0

9.0 PACKAGE SPECIFICATION

9.1 Packing form

- (1) package quantity in one carton: 10 pieces.
- (2) carton size: 544 mm×302 mm×446^H mm.
- (3) for domestic transportation only.

9.2 Packing assembly drawings

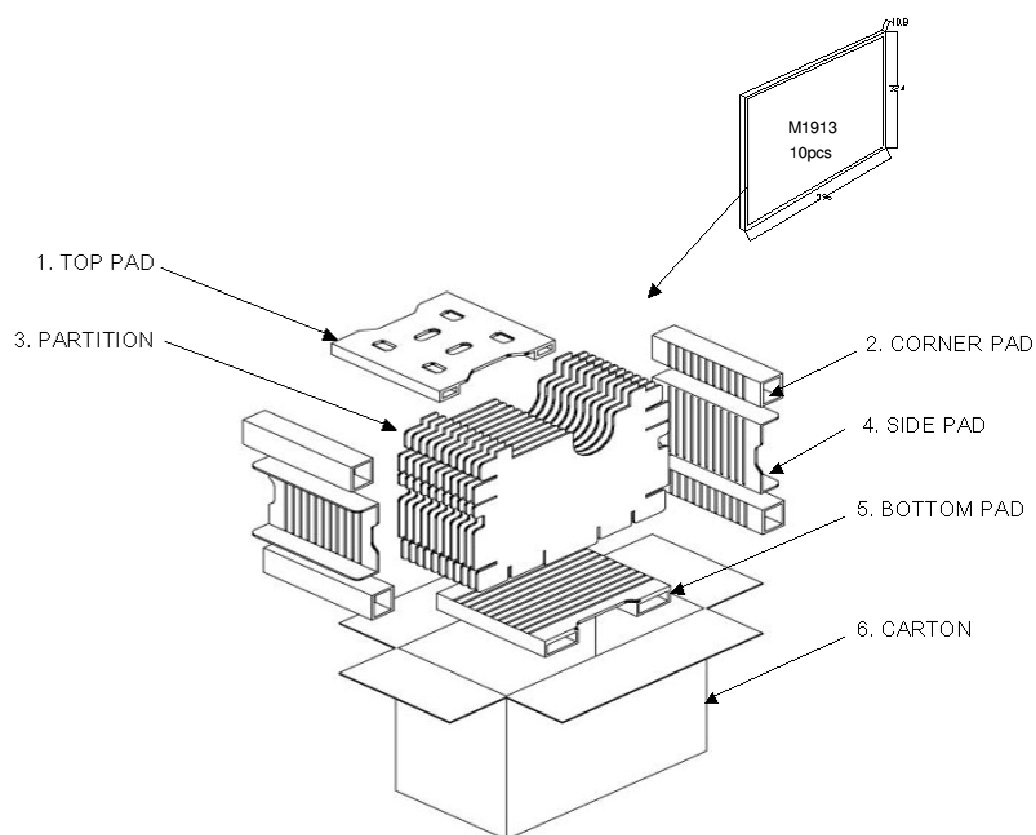

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	24 / 25
Document No.		Revision	2.0

10.0 GENERAL PRECAUTION

10.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

10.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

10.3 Breakage of LCD Panel

10.3.1 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

10.3.2 If liquid crystal contacts mouth or eyes, rinse out with water immediately.

10.3.3 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

10.3.4 Handle carefully with chips of glass that may cause injury, when the glass is broken.

10.4 Electric Shock

10.4.1 Disconnect power supply before handling LCD module.

10.4.2 Do not pull or fold the CCFL cable.

10.4.3 Do not touch the parts inside LCD modules and the fluorescent lamp's connector or cables in order to prevent electric shock.

10.5 Absolute Maximum Ratings and Power Protection Circuit

10.5.1 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.

10.5.2 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.

10.5.3 It's recommended employing protection circuit for power supply.

10.6 Operation

10.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.

Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.

10.6.2 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.

10.6.3 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.

11.6.4 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzene or other adequate solvent.

Document Title	HSD190MEN6-A Formal Specification for Solomon	Page No.	25 / 25
Document No.		Revision	2.0

10.7 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.

10.8 Static Electricity

10.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.

10.8.2 Because LCD module uses CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge.

10.8.3 Persons who handle the module should be grounded through adequate methods.

10.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

10.10 Disposal

When disposing LCD module, obey the local environmental regulations.