



PROPRIETARY NOTE

THIS SPECIFICATION IS THE PROPERTY OF BOE TFT-LCD SBU AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE TFT-LCD SBU AND MUST BE RETURNED TO BOE TFT-LCD SBU UPON ITS REQUEST

TITLE : HT170EX1-100 Product Specification

Rev. 0

BOE TFT-LCD SBU

BEIJING BOE OPTOELECTRONICS TECHNOLOGY

BOE HYDIS TECHNOLOGY

| SPEC. NUMBER | PRODUCT GROUP | REV. | ISSUE DATE | PAGE |
|---------------------|----------------------|-------------|-------------------|-------------|
| S864-1225 | TFT-LCD | 0 | 2005.06.28 | 1 OF 27 |



京东方
BOE

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD Product

0

2005.06.28

REVISION HISTORY

| REV. | ECN NO. | DESCRIPTION OF CHANGES | DATE | PREPARED |
|---------------------|---------|------------------------------------|----------|-------------|
| 0 | | Initial Release | 05.06.28 | S. J. LEE |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| SPEC. NUMBER | | SPEC. TITLE | | PAGE |
| S864-1225 | | HT170EX1-100 Product Specification | | 2 OF 27 |



京东方
BOE

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

Contents

| No. | Item | Page |
|------|--|------|
| 1.0 | General Description | 4 |
| 2.0 | Absolute Maximum Ratings | 6 |
| 3.0 | Electrical Specifications | 7 |
| 4.0 | Optical Specifications | 8 |
| 5.0 | Interface Connection | 10 |
| 6.0 | Signal Timing Specifications | 13 |
| 7.0 | Input Signals, Basic Display Colors & Gray Scale of Colors | 16 |
| 8.0 | Power Sequence | 17 |
| 9.0 | Mechanical Characteristics | 18 |
| 10.0 | Reliability Test | 19 |
| 11.0 | Handling & Cautions | 20 |
| 12.0 | Product Serial Number | 21 |
| 13.0 | Packing | 22 |
| 14.0 | Appendix | 24 |

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

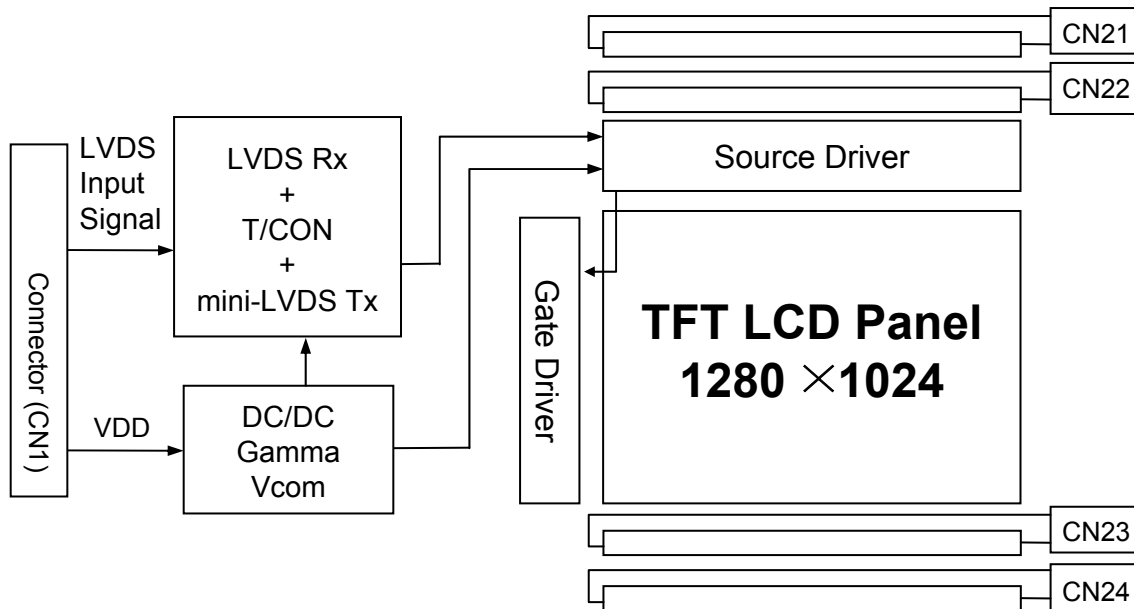
PAGE

3 OF 27

1.0 GENERAL DESCRIPTION

1.1 Introduction

HT170EX1-100 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 17.0 inch diagonally measured active area with SXGA resolutions (1280 horizontal by 1024 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16,194,227 colors. The TFT-LCD panel used for this module is adapted for a low reflection and higher color type.



1.2 Features

- LVDS Interface with 2 pixel / clock
- High-speed response
- Compact & Slim design
- Low power consumption
- 6-bit (FRC) color depth, display 16,194,227 colors
- Incorporated edge type back-light (Four lamps)
- High luminance and contrast ratio, low reflection and wide viewing angle
- DE (Data Enable) & H-Sync & V-Sync mode
- RoHS Compliant

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

4 OF 27



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

1.3 Application

- Desktop Type of PC & Workstation Use
- Slim-Size Display for Stand-alone Monitor
- Display Terminals for Control System
- Monitors for Process Controller

1.4 General Specification

The followings are general specifications at the model HT170EX1-100.

<Table 1. General Specifications>

| Parameter | Specification | Unit | Remarks |
|---------------------|------------------------------------|-------------|----------------|
| Active area | 337.92(H) * 270.336(V) | mm | |
| Number of pixels | 1280(H) × 1024(V) | pixels | |
| Pixel pitch | 0.264(H) × 0.264(V) | mm | |
| Pixel arrangement | RGB Vertical stripe | | |
| Display colors | 16,194,227 | colors | |
| Display mode | Normally White | | |
| Dimensional outline | 354.9(H) × 290.3(V) × 13.0(D) typ. | mm | |
| Weight | 1550 (max.) | gram | |
| Surface Treatment | Haze 25%, 3H | | |
| Back-light | Top/Bottom edge side, 4-CCFL type | | Note 1 |

Note : 1. CCFL (Cold Cathode Fluorescent Lamp)

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

5 OF 27


2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings> [VSS=GND=0V]

| Parameter | Symbol | Min. | Max. | Unit | Remarks |
|---------------------------|----------|---------|--------------|------|------------|
| Power Supply Voltage | V_{DD} | VSS-0.5 | 6.5 | V | Ta = 25 °C |
| Logic Supply Voltage | V_{IN} | VSS-0.3 | $V_{DD}+0.3$ | V | |
| Back-light Lamp Current | I_{BL} | 3 | 8 | mA | |
| Back-light Lamp Frequency | F_L | 40 | 80 | KHz | |
| Operating Temperature | T_{OP} | 0 | +50 | °C | 1) |
| Storage Temperature | T_{ST} | -20 | +60 | °C | 1) |

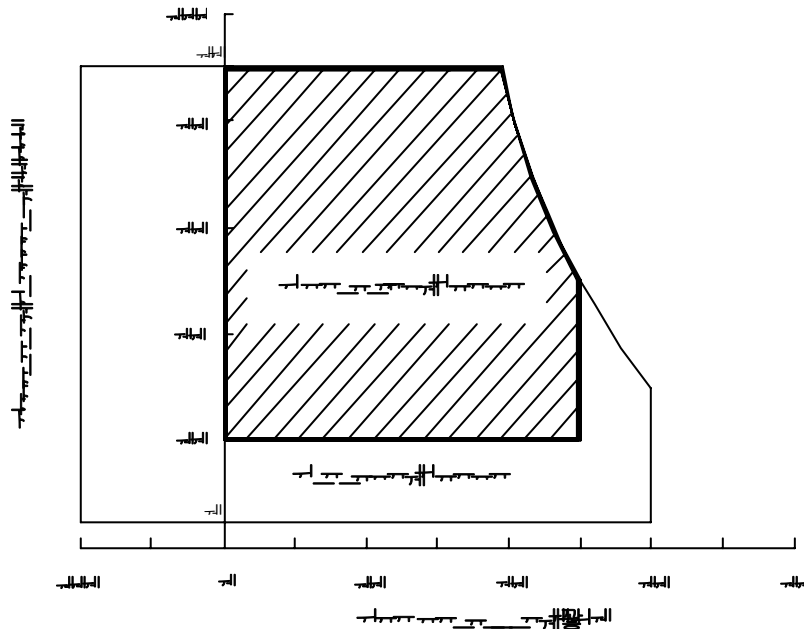Note : 1) Temperature and relative humidity range are shown in the figure below.
Wet bulb temperature should be 39 °C max. and no condensation of water.



3.0 ELECTRICAL SPECIFICATIONS

< Table 3. Electrical specifications >

[Ta =25 ±2 °C]

| Parameter | | Min. | Typ. | Max. | Unit | Remarks | |
|---|-----------------|--------------------|------|------|-------------------|-----------------------------|---------------------------------|
| Power Supply Voltage | V _{DD} | 4.5 | 5.0 | 5.5 | V | Note 1 | |
| Power Supply Current | I _{DD} | - | 800 | 1000 | mA | | |
| Permissible Input Ripple Voltage | V _{RF} | | | 100 | mV | V _{DD} = 5.0V | |
| High Level Differential Input Threshold Voltage | V _{IH} | | - | +100 | mV | V _{cm} = 1.2V typ. | |
| Low Level Differential Input Threshold Voltage | V _{IL} | -100 | - | | mV | | |
| Back-light Lamp Voltage | V _{BL} | 560 | 580 | 690 | V _{rms} | | |
| Back-light Lamp Current | I _{BL} | 3.0 | 7.5 | 8.0 | mA _{rms} | | |
| Back-light Lamp operating Frequency | F _L | 40 | - | 80 | KHz | Note 2 | |
| Lamp Start Voltage | | | | 1400 | V _{rms} | 25°C, Note 3 | |
| | | | | 1700 | V _{rms} | 0°C, Note 3 | |
| Lamp Life | | 50000 | - | | Hrs | I _{BL} = 8.0mA | |
| Power Consumption | | P _D | - | 4.0 | 5.0 | W | |
| | | P _{BL} | | 17.4 | ← | W | I _{BL} = 7.5mA, Note 4 |
| | | P _{total} | | 21.4 | 22.4 | W | |

- Notes :
- The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for VDD=5.0V, Frame rate=75Hz and Clock frequency = 67.5MHz. Test Pattern of power supply current
 - Typ : Black Pattern
 - Max : Dot Pattern
 - The lamp frequency should be selected as different as possible from the horizontal synchronous frequency and its harmonics to avoid interference, which may cause line flow on the display
 - The voltage above this value should be applied to the lamps for more than 1 second to start-up. Otherwise the lamps may not be turned on.
 - Calculated value for reference (V_{BL} × I_{BL}) × 4 excluding inverter loss.

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

7 OF 27



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and ϕ equal to 0° . We refer to $\theta_{\theta=0}$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta_{\theta=90}$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta_{\theta=180}$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta_{\theta=270}$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or ϕ , the center of the measuring spot on the Display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 5.0V +/-10% at 25°C . Optimum viewing angle direction is 6 o'clock.

4.2 Optical Specifications

[VDD = 5.0V, Frame rate = 60Hz, Clock = 54MHz, $I_{BL} = 7.5\text{mA}$, $T_a = 25 \pm 2^\circ\text{C}$]

| Parameter | | Symbol | Condition | Min. | Typ. | Max. | Unit | Remark |
|----------------------------|------------|---------------|--|-------|-------|-------|-------------------|--------|
| Viewing Angle | Horizontal | θ_3 | CR > 10 | 65 | 75 | - | Deg. | Note 1 |
| | | θ_9 | | 65 | 75 | - | Deg. | |
| | Vertical | θ_{12} | | 65 | 75 | - | Deg. | |
| | | θ_6 | | 50 | 60 | - | Deg. | |
| Contrast ratio | | CR | | 350 | 500 | | | Note 2 |
| Luminance of White | | Y_w | | 250 | 300 | | cd/m ² | Note 3 |
| White luminance uniformity | | ΔY | | 75 | - | - | % | Note 4 |
| Reproduction of color | White | W_x | $\theta = 0^\circ$ (Center) Normal Viewing Angle | 0.283 | 0.313 | 0.343 | | Note 5 |
| | | W_y | | 0.299 | 0.329 | 0.359 | | |
| | Red | R_x | | 0.617 | 0.647 | 0.677 | | |
| | | R_y | | 0.307 | 0.337 | 0.367 | | |
| | Green | G_x | | 0.253 | 0.283 | 0.313 | | |
| | | G_y | | 0.570 | 0.600 | 0.630 | | |
| | Blue | B_x | | 0.112 | 0.142 | 0.172 | | |
| | | B_y | | 0.054 | 0.084 | 0.114 | | |
| Response Time | Rise | T_r | | | 8 | 12 | ms | Note 6 |
| | Decay | T_d | | | | | | |
| Cross Talk | | CT | | - | - | 2.0 | % | Note 7 |

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

8 OF 27



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

Note :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
2. Contrast measurements shall be made at viewing angle of $\theta = 0^\circ$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIGURE 1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
4. The White luminance uniformity on LCD surface is then expressed as :
 $\Delta Y = (\text{Minimum Luminance of 9points} / \text{Maximum Luminance of 9points}) * 100$
 (See FIGURE 2 shown in Appendix).
5. The color chromaticity coordinates specified in Table 4. shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
6. The electro-optical response time measurements shall be made as FIGURE 3 shown in Appendix by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Td, and 90% to 10% is Tr.
7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark. (See FIGURE 4 shown in Appendix).

SPEC. NUMBER

SPEC. TITLE

PAGE

S864-1225

HT170EX1-100 Product Specification

9 OF 27



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

5.0 INTERFACE CONNECTION.

5.1 Electrical Interface Connection

- CN11 Mode Side Connector : UJU IN-30-OB100 or Equivalent
User Side Connector : UJU HS-30-BB100 or Equivalent

| Pin No | Symbol | Function | Remark |
|--------|---------|--------------------------|--------|
| 1 | RXO0- | LVDS ODD 0- SIGNAL | |
| 2 | RXO0+ | LVDS ODD 0+ SIGNAL | |
| 3 | RXO1- | LVDS ODD 1- SIGNAL | |
| 4 | RXO1+ | LVDS ODD 1+ SIGNAL | |
| 5 | RXO2- | LVDS ODD 2- SIGNAL | |
| 6 | RXO2+ | LVDS ODD 2+ SIGNAL | |
| 7 | GND | GROUND | |
| 8 | RXOCLK- | LVDS ODD CLOCK- SIGNAL | |
| 9 | RXOCLK+ | LVDS ODD CLOCK+ SIGNAL | |
| 10 | RXO3- | LVDS ODD 3- SIGNAL | |
| 11 | RXO3+ | LVDS ODD 3+ SIGNAL | |
| 12 | RXE0- | LVDS EVEN 0- SIGNAL | |
| 13 | RXE0+ | LVDS EVEN 0+ SIGNAL | |
| 14 | GND | GROUND | |
| 15 | RXE1- | LVDS EVEN 1- SIGNAL | |
| 16 | RXE1+ | LVDS EVEN 1+ SIGNAL | |
| 17 | GND | GROUND | |
| 18 | RXE2- | LVDS EVEN 2- SIGNAL | |
| 19 | RXE2+ | LVDS EVEN 2+ SIGNAL | |
| 20 | RXECLK- | LVDS EVEN CLOCK- SIGNAL | |
| 21 | RXECLK+ | LVDS EVEN CLOCK+ SIGNAL | |
| 22 | RXE3- | LVDS EVEN 3- SIGNAL | |
| 23 | RXE3+ | LVDS EVEN 3+ SIGNAL | |
| 24 | GND | GROUND | |
| 25 | NC | NO CONNECTION | |
| 26 | DE | NO CONNECTION | |
| 27 | NC | NO CONNECTION | |
| 28 | VDD | POWER SUPPLY (+5.0 V) | |
| 29 | VDD | | |
| 30 | VDD | | |

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

10 OF 27



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

5.2 LVDS Interface

5.2.1 Odd LVDS Transmitter (Tx; THC63LVDF83A or Equivalent) Signal Interface

| | Input Signal | Transmitter | | Interface | | HT170EX1-100 (CN1) | Remark |
|-------------------------------------|--------------|-------------|----------------|----------------------|----------------------|--------------------|--------|
| | | Pin No. | Pin No. | System (Tx) | TFT-LCD (Rx) | Pin No. | |
| O D D L V D S | OR0 | 51 | 48 47 | OUT0- OUT0+ | RXO0- RXO0+ | 1 2 | |
| | OR1 | 52 | | | | | |
| | OR2 | 54 | | | | | |
| | OR3 | 55 | | | | | |
| | OR4 | 56 | | | | | |
| | OR5 | 3 | | | | | |
| | OG0 | 4 | 46 45 | OUT1- OUT1+ | RXO1- RXO1+ | 3 4 | |
| | OG1 | 6 | | | | | |
| | OG2 | 7 | | | | | |
| | OG3 | 11 | | | | | |
| | OG4 | 12 | | | | | |
| | OG5 | 14 | | | | | |
| | OB0 | 15 | 42 41 | OUT2- OUT2+ | RXO2- RXO2+ | 5 6 | |
| | OB1 | 19 | | | | | |
| | OB2 | 20 | | | | | |
| | OB3 | 22 | | | | | |
| | OB4 | 23 | | | | | |
| | OB5 | 24 | | | | | |
| | Hsync | 27 | 40 39 | CLK OUT- CLK OUT+ | RXO CLK- RXO CLK+ | 8 9 | |
| | Vsync | 28 | | | | | |
| DE | 30 | | | | | | |
| MCLK | 31 | | | | | | |
| OR6 | 50 | 38 37 | OUT3- OUT3+ | RXO3- RXO3+ | 10 11 | | |
| OR7 | 2 | | | | | | |
| OG6 | 8 | | | | | | |
| OG7 | 10 | | | | | | |
| OB6 | 16 | | | | | | |
| OB7 | 18 | | | | | | |
| RSVD | 25 | | | | | | |

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

11 OF 27



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

5.2.2 Even LVDS Transmitter (Tx; THC63LVDF83A or Equivalent) Signal Interface

| | Input Signal | Transmitter | | Interface | | HT170X1-100 (CN1) | Remark |
|--|--------------|-------------|----------|----------------------|----------------------|-------------------|--------|
| | | Pin No. | Pin No. | System (Tx) | TFT-LCD (Rx) | Pin No. | |
| E V E N L V D S | ER0 | 51 | 48 47 | OUT0- OUT0+ | RXO0- RXO0+ | 12 13 | |
| | ER1 | 52 | | | | | |
| | ER2 | 54 | | | | | |
| | ER3 | 55 | | | | | |
| | ER4 | 56 | | | | | |
| | ER5 | 3 | | | | | |
| | EG0 | 4 | 46 45 | OUT1- OUT1+ | RXO1- RXO1+ | 15 16 | |
| | EG1 | 6 | | | | | |
| | EG2 | 7 | | | | | |
| | EG3 | 11 | | | | | |
| | EG4 | 12 | | | | | |
| | EG5 | 14 | | | | | |
| | EB0 | 15 | 42 41 | OUT2- OUT2+ | RXO2- RXO2+ | 18 19 | |
| | EB1 | 19 | | | | | |
| | EB2 | 20 | | | | | |
| | EB3 | 22 | | | | | |
| | EB4 | 23 | | | | | |
| | EB5 | 24 | | | | | |
| | Hsync | 27 | 40 39 | CLK OUT- CLK OUT+ | RXO CLK- RXO CLK+ | 20 21 | |
| | Vsync | 28 | | | | | |
| | DE | 30 | | | | | |
| | MCLK | 31 | | | | | |
| | ER6 | 50 | 38 37 | OUT3- OUT3+ | RXO3- RXO3+ | 22 23 | |
| | ER7 | 2 | | | | | |
| | EG6 | 8 | | | | | |
| | EG7 | 10 | | | | | |
| | EB6 | 16 | | | | | |
| | EB7 | 18 | | | | | |
| RSVD | 25 | | | | | | |

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

12 OF 27



PRODUCT GROUP

REV

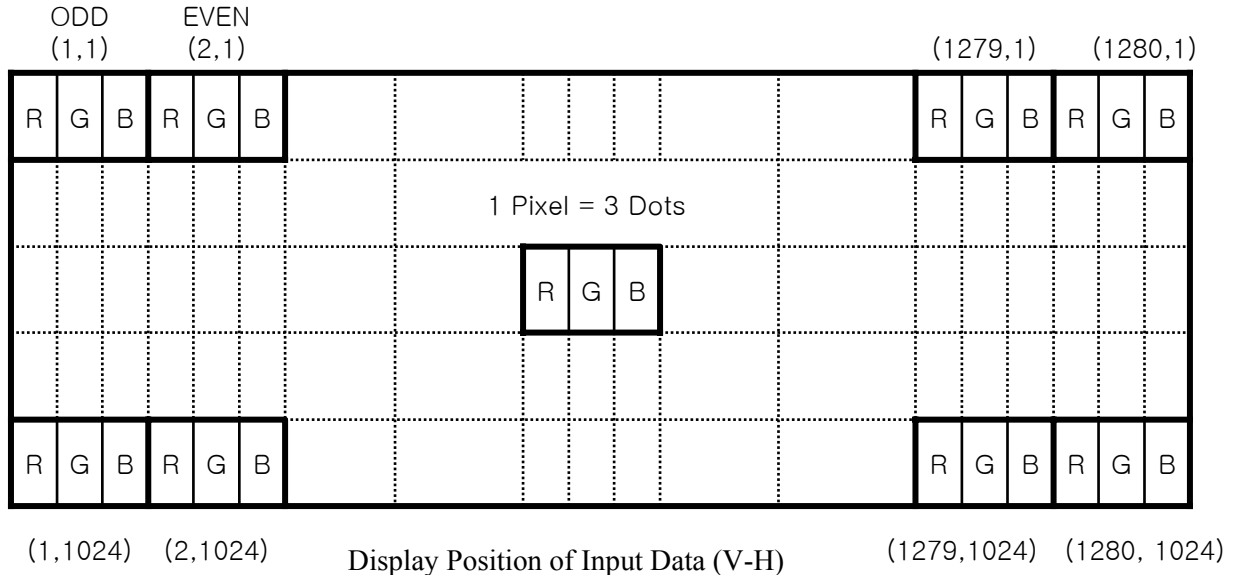
ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

5.3 Data Input Format



5.4 Back-light Interface Connection

- CN 21,22,23,24 Module Side Connector : 35001HS-02L(YeonHo) or Equivalent
- User Side Connector : 35001HS-02L(YeonHo) or Equivalent

| Pin No. | INPUT | Color | Function |
|---------|-------|---------------|--------------|
| 1 | HOT | Pink & Blue | High Voltage |
| 2 | COLD | Black & White | Ground |

6.0 SIGNAL TIMING SPECIFICATION

6.1 Timing Parameters (DE & H-Sync & V-Sync mode)

| Item | Symbols | Min | Typ | Max | Unit | |
|---------------------------|------------|-------|-------|------|--------|-----|
| Clock | Frequency | 1/Tc | 40 | 54 | 68 | MHz |
| | High Time | Tch | 4 | - | - | ns |
| | Low Time | Tcl | 4 | - | - | ns |
| Data | Setup Time | Tds | 4 | - | - | ns |
| | Hold Time | Tdh | 4 | - | - | ns |
| Data Enable Setup Time | Tes | 4 | - | - | ns | |
| Frame Period | Tv | 1032 | 1066 | 1536 | lines | |
| | | 13.33 | 16.67 | - | msec | |
| Vertical Display Period | Tvd | - | 1024 | - | lines | |
| One Line Scanning Period | Th | 672 | 844 | 1022 | clocks | |
| Horizontal Display Period | Tdh | 640 | 640 | 640 | clocks | |

SPEC. NUMBER

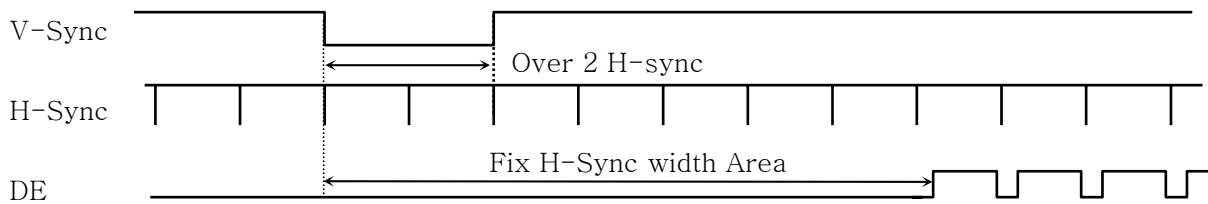
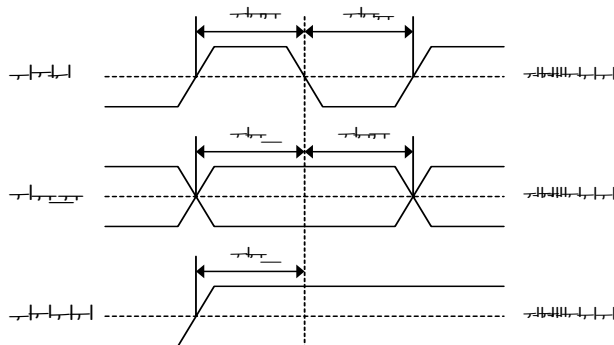
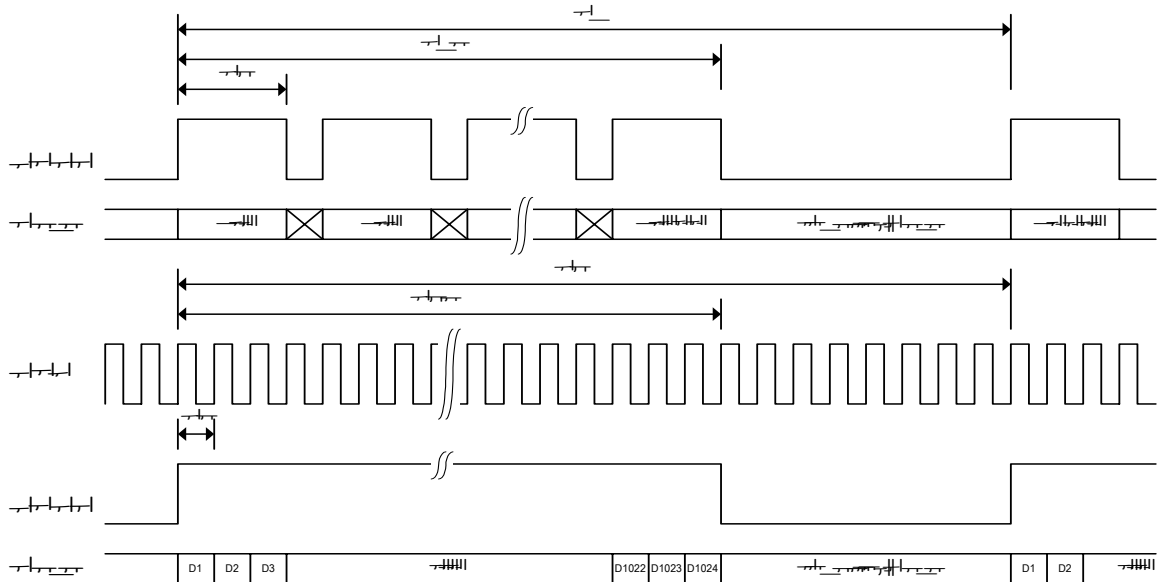
S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

13 OF 27




- 1) Need over 2 H-Sync during V-Sync Low Period (Recommend : over 3 H-Sync)
- 2) Fix H-Sync width form V-Sync falling edge to first DE rising edge

6.2 LVDS Rx Interface Timing Parameter

The specification of the LVDS Rx interface timing parameter is shown in Table 4.

<Table 4. LVDS Rx Interface Timing Specification>

| Item | Symbol | Min | Typ | Max | Unit | Remark |
|----------------|--------|-----------------|-------------|-----------------|------|--------|
| CLKIN Period | tRCIP | 14.7 | 18.5 | - | msec | |
| CLK Difference | tCdiff | -tRCIP*(3/7) | 0 | +tRCIP*(3/7) | nsec | |
| Input Data 0 | tRIP1 | -0.4 | 0.0 | +0.4 | nsec | |
| Input Data 1 | tRIP0 | tRCIP/7-0.4 | tRCIP/7 | tRCIP/7+0.4 | nsec | |
| Input Data 2 | tRIP6 | 2 × tRCIP/7-0.4 | 2 × tRCIP/7 | 2 × tRCIP/7+0.4 | nsec | |
| Input Data 3 | tRIP5 | 3 × tRCIP/7-0.4 | 3 × tRCIP/7 | 3 × tRCIP/7+0.4 | nsec | |
| Input Data 4 | tRIP4 | 4 × tRCIP/7-0.4 | 4 × tRCIP/7 | 4 × tRCIP/7+0.4 | nsec | |
| Input Data 5 | tRIP3 | 5 × tRCIP/7-0.4 | 5 × tRCIP/7 | 5 × tRCIP/7+0.4 | nsec | |
| Input Data 6 | tRIP2 | 6 × tRCIP/7-0.4 | 6 × tRCIP/7 | 6 × tRCIP/7+0.4 | nsec | |

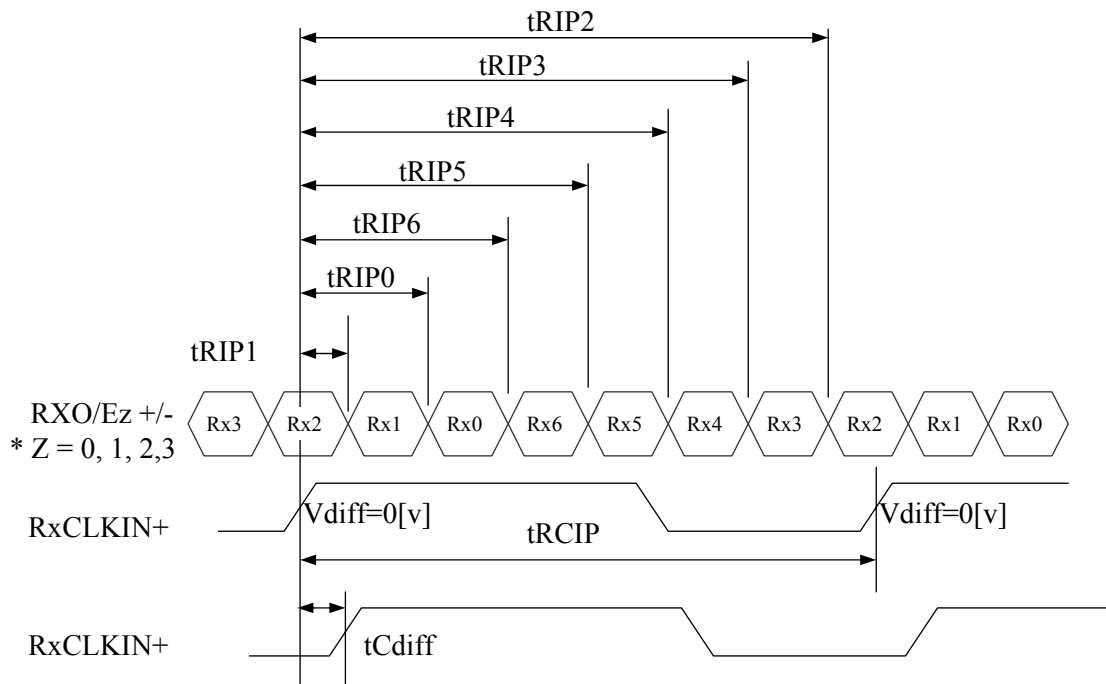

$$* V_{diff} = (RXO/Ez+) - (RXO/Ez-), \dots, (RXO/ECLK+) - (RXO/ECLK-)$$



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

| Color & Gray Scale | | Red Data | | | | | | | | Green Data | | | | | | | | Blue Data | | | | | | | |
|---------------------|----------|----------|----|----|----|----|----|----|----|------------|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----|
| | | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |
| Basic Colors | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Green | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Red | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Gray Scale of Red | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | △ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Darker | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | △ | ↑ | | | | | | | | ↑ | | | | | | | | ↑ | | | | | | | |
| | ▽ | ↓ | | | | | | | | ↓ | | | | | | | | ↓ | | | | | | | |
| | Brighter | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ▽ | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Gray Scale of Green | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | △ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Darker | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | △ | ↑ | | | | | | | | ↑ | | | | | | | | ↑ | | | | | | | |
| | ▽ | ↓ | | | | | | | | ↓ | | | | | | | | ↓ | | | | | | | |
| | Brighter | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ▽ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Gray Scale of Blue | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | △ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | Darker | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| | △ | ↑ | | | | | | | | ↑ | | | | | | | | ↑ | | | | | | | |
| | ▽ | ↓ | | | | | | | | ↓ | | | | | | | | ↓ | | | | | | | |
| | Brighter | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 |
| | ▽ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 |
| | Blue | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Gray Scale of White | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | △ | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | |
| | Darker | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| | △ | ↑ | | | | | | | | ↑ | | | | | | | | ↑ | | | | | | | |
| | ▽ | ↓ | | | | | | | | ↓ | | | | | | | | ↓ | | | | | | | |
| | Brighter | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 |
| | ▽ | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

SPEC. NUMBER

SPEC. TITLE

PAGE

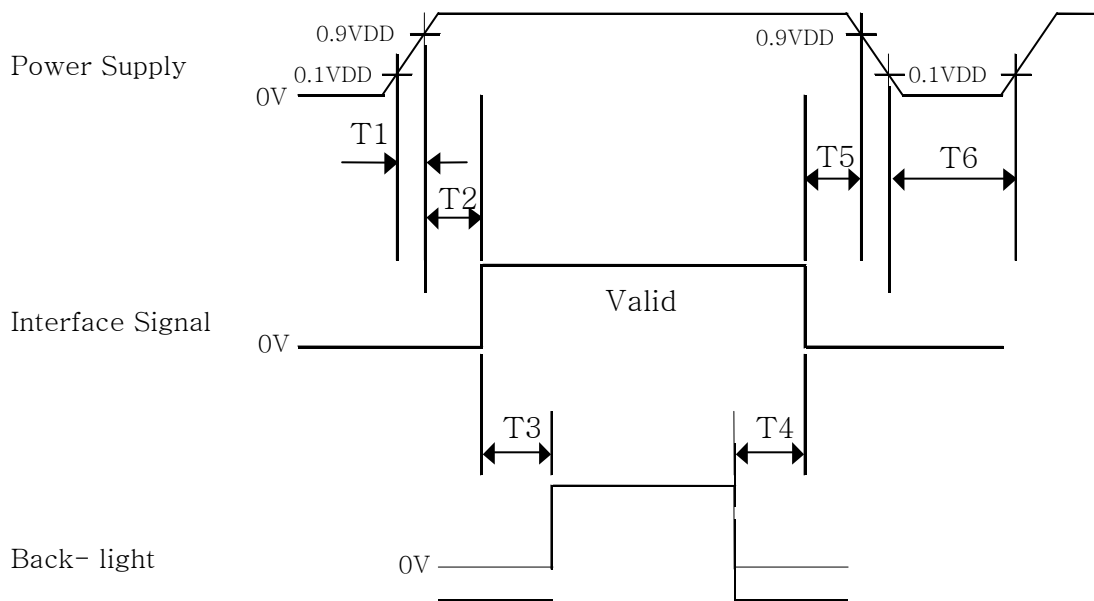
S864-1225

HT170EX1-100 Product Specification

16 OF 27

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below



- $0 < T1 \leq 10 \text{ ms}$
- $0 \leq T2 \leq 50 \text{ ms}$
- $200\text{ms} \leq T3$
- $100\text{ms} \leq T4$
- $0 \leq T5 \leq 50\text{ms}$
- $1 \text{ sec} \leq T6$

Notes:

1. When the power supply VDD is 0V, Keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on.
3. Back Light must be turn on after power for logic and interface signal are valid.

9.0 MECHANICAL CHARACTERISTICS

9.1 Dimensional Requirements

FIGURE 6 (located in Appendix) shows mechanical outlines for the model HT170EX1-100. Other parameters are shown in Table 5.

<Table 5. Dimensional Parameters>

| Parameter | Specification | Unit |
|---------------------|--|--------|
| Dimensional outline | 354.9 (H) × 290.3 (V) × 13.0 (D) ± 0.5 | mm |
| Weight | 1550 max. | gram |
| Active area | 337.92 (H) × 270.336 (V) | mm |
| Pixel pitch | 0.264(H) × 0.264(V) | mm |
| Number of pixels | 1280(H) × 1024(V) (1 pixel = R + G + B dots) | pixels |
| Back-light | Top / Bottom edge side 4-CCFL type | |

9.2 Mounting

See FIGURE 5. (shown in Appendix)

9.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

9.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350 [lux.]



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

10.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 6. Reliability Test Parameters >

| No | Test Items | Conditions |
|----|---|---|
| 1 | High temperature storage test | Ta = 60 °C, 240 hrs |
| 2 | Low temperature storage test | Ta = -20 °C, 240 hrs |
| 3 | High temperature & high humidity operation test | Ta = 50 °C, 80%RH, 240hrs |
| 4 | High temperature operation test | Ta = 50 °C, 240hrs |
| 5 | Low temperature operation test | Ta = 0 °C, 240hrs |
| 6 | Thermal shock | Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle |
| 7 | Vibration test (non-operating) | Frequency : 10 ~ 300 Hz, Sweep rate 30 min Gravity / AMP : 1.5 G Period : ±X, ±Y, ±Z 30 min |
| 8 | Shock test (non-operating) | Gravity : 70G Pluse width : 11msec, sine wave ±X, ±Y, ±Z Once for each direction |
| 9 | Electro-static discharge test | Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV |

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

19 OF 27



京东方
BOE

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

11.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the module
 - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module
 - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
 - As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
 - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
 - Do not pull the interface connector in or out while the LCD module is operating.
 - Put the module display side down on a flat horizontal plane.
 - Handle connectors and cables with care.
- (3) Cautions for the operation
 - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
 - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- (4) Cautions for the atmosphere
 - Dew drop atmosphere should be avoided.
 - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics
 - Do not apply fixed pattern data signal to the LCD module at product aging.
 - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions
 - Do not disassemble and/or re-assemble LCD module.
 - Do not re-adjust variable resistor or switch etc.
 - When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

20 OF 27



PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

12.0 PRODUCT SERIAL NUMBER



| | | | | | | |
|---|---|---|---|---|---------------|-----------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| X | X | X | X | X | 1 0 0 - X X X | X X X X X |

Type designation

No 1. Control Number

No 2. Rank / Grade

No 3. Line Classification (H:BOE HYDIS, L:LCM, A/B/C:BOE OT)

No 4. Year (5 : 2005, 6 : 2006, ...)

No 5. Month (1, 2, 3, ..., 9, X, Y, Z)

No 6. FG Code

No 7. Serial Number

SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

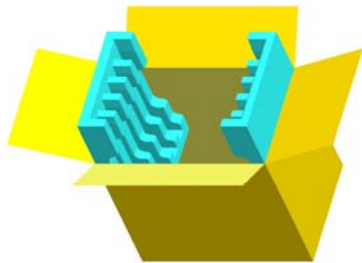
PAGE

21 OF 27


13.0 PACKING

13.1 Packing Order

Put Pad into the box.



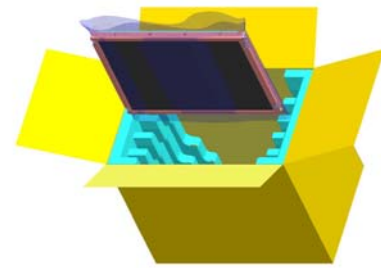
As shown in the figure, place the Modules bundled by shielding bag in the box.



After sealing the box, attach Packing Label on the attach position sign area of the box.



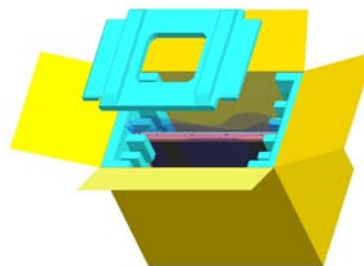Place a cover on the top of the box.





PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2005.06.28

13.2 Packing Note

- Box Dimension: 333mm(W)X 365mm(L)X 455(D)
- Package Quantity in one Box: 8pcs

13.3 Box label

- Label Size: 108 mm (L) × 56 mm (W)
- Contents

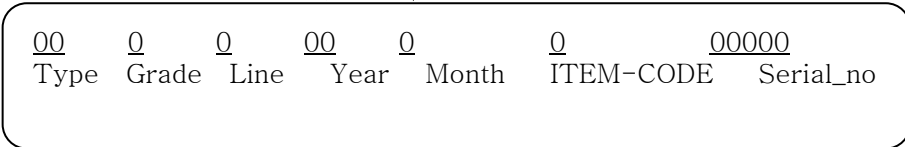
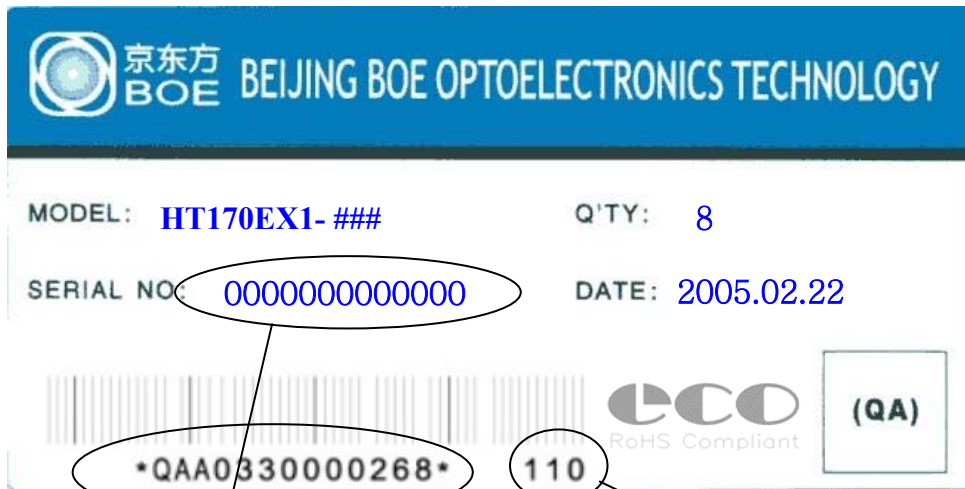
Model: HT170EX1

Q`ty: Module Q`ty in one box

Serial No.: Box Serial No. See next page for detail description.

Date: Packing Date

FG Code: FG Code of Product



FG CODE

SPEC. NUMBER

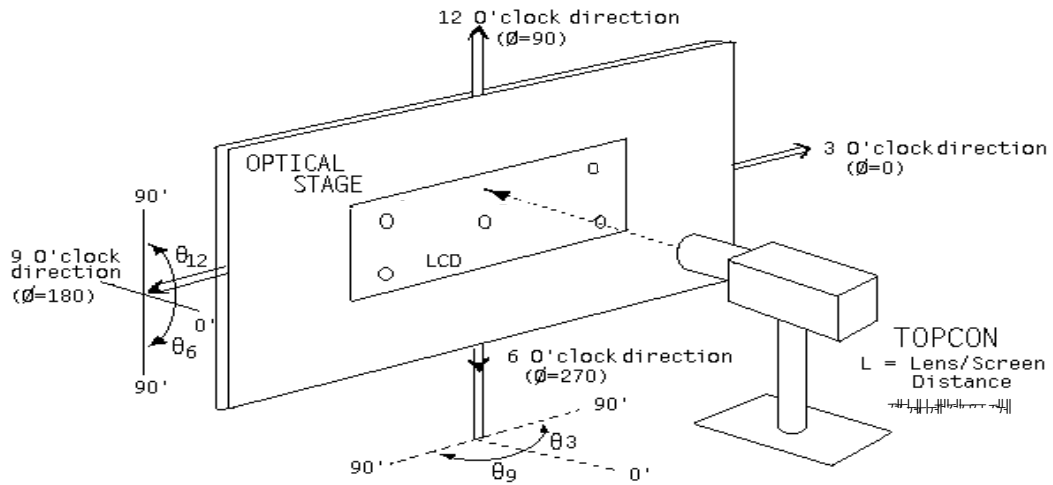
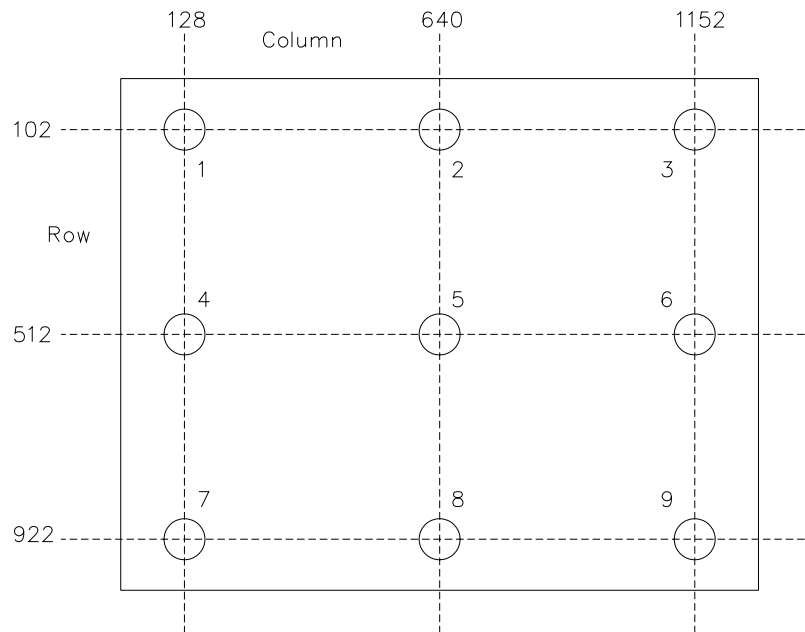
S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

23 OF 27

14.0 APPENDIX
Figure 1. Measurement Set Up

Figure 2. White Luminance and Uniformity Measurement Locations

SPEC. NUMBER



S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

24 OF 27

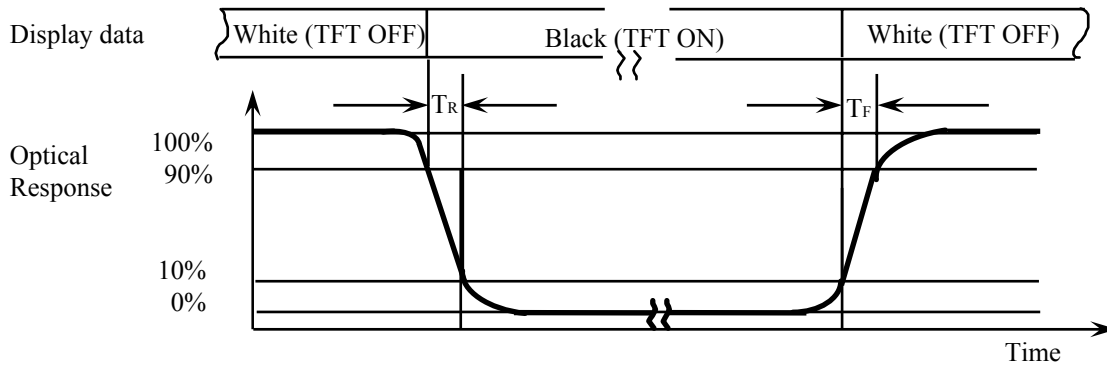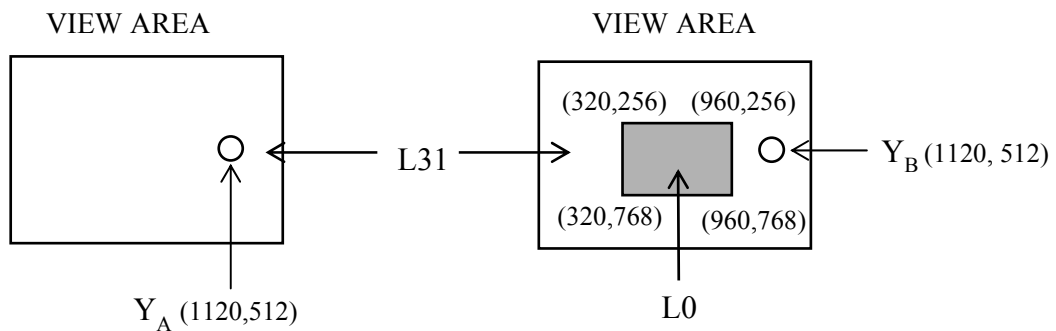Figure 3. Response Time Testing

Figure 4. Cross Modulation Test Description


$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$


Where:

Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns

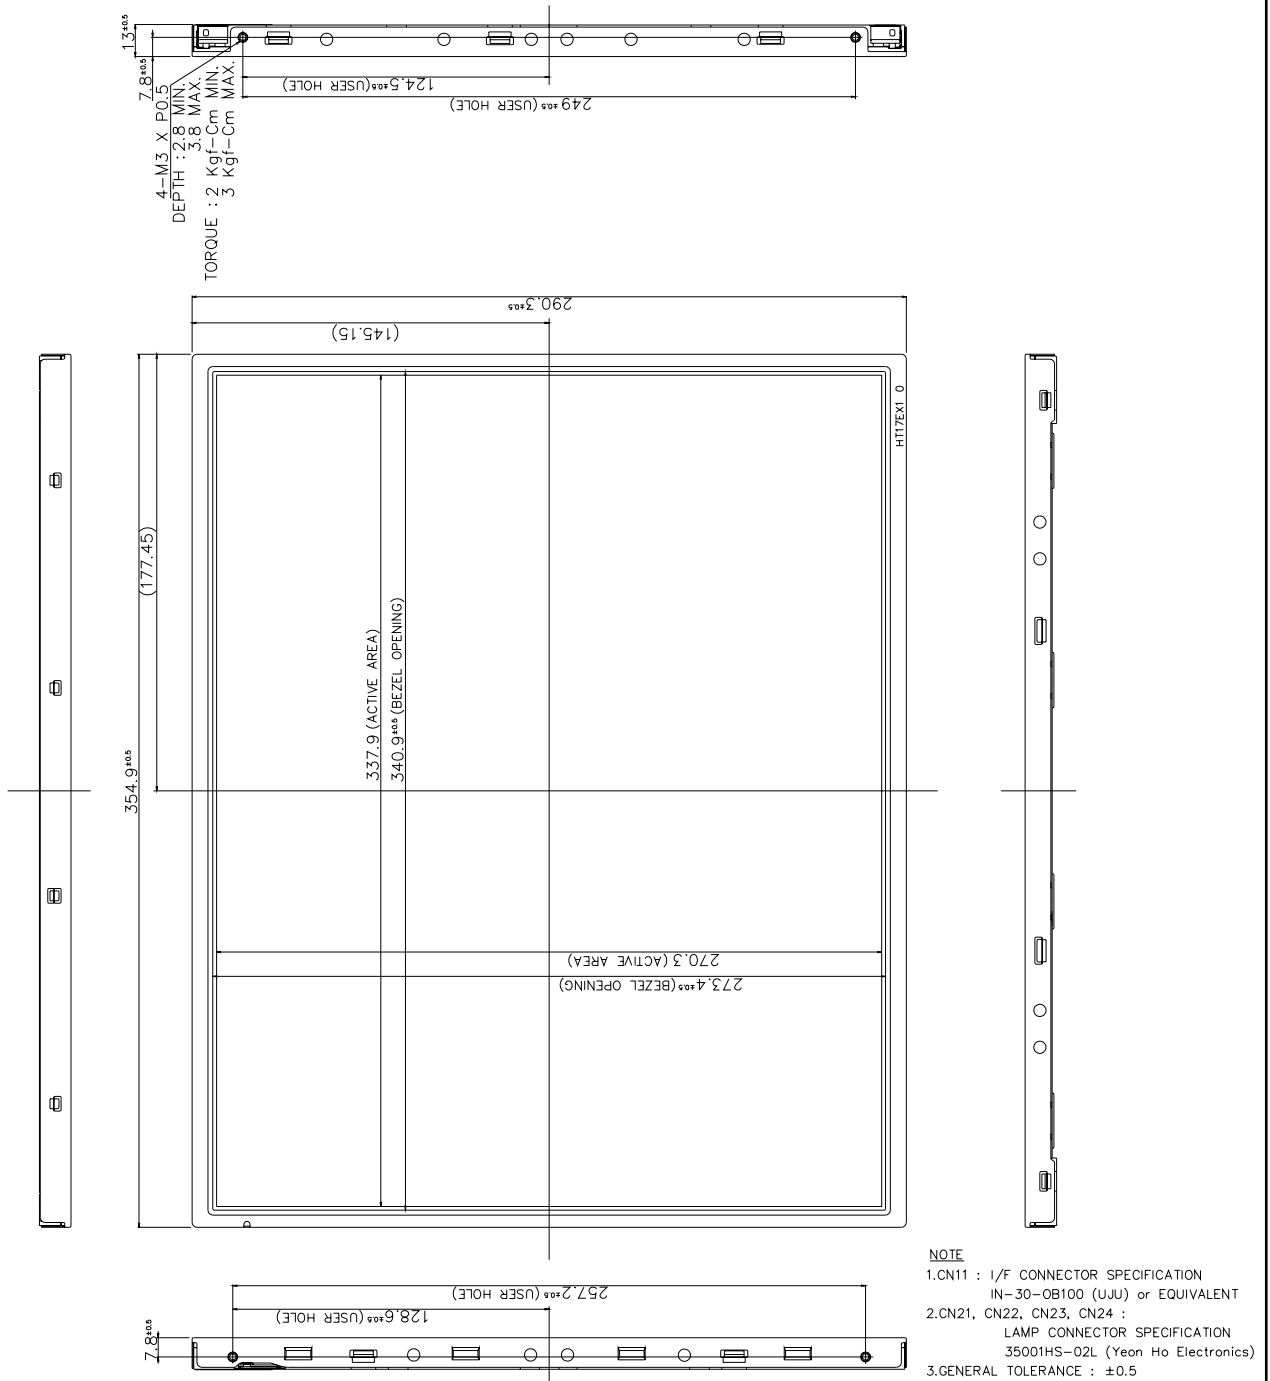Figure 5. TFT-LCD Module Outline Dimensions (Front view)



SPEC. NUMBER

S864-1225

SPEC. TITLE

HT170EX1-100 Product Specification

PAGE

26 OF 27

