

APPROVAL

| PART NO. | DESCRIPTION | REMARKS |
|-------------------|---|-------------------------|
| HT5711LH-T | LCD MODULE (640 × RGB × 480) with Touch Screen | * ROHS compliant |

| | |
|--------------------------|--|
| CUSTOMER APPLICATION P/N | |
| APPROVED BY | |
| DATE | |

PLEASE KINDLY FIND AND APPROVE THE SPECIFICATIONS INSERTED
HEREIN AND RETURN ONE COPY HERE OF WITH YOUR SIGNATURE OF APPROVAL.

| PERPARED BY | CHECKED BY | CONFIRMED BY |
|-------------|------------|--------------|
| | | |



HYES Optoelectronics, Inc.

2000 Wyatt Drive Suite 6
Santa Clara, CA 95054 USA

CONTENTS:

| No. | Item |
|-----|--|
| 1 | BASIC SPECIFICATION 1.1 Mechanical Specification 1.2 Display Specification 1.3 Outline Dimension 1.4 Block Diagram 1.5 Interface Pin |
| 2 | ELECTRICAL CHARACTERISTICS 2.1 Absolute Maximum Ratings 2.2 DC Characteristics 2.3 AC Characteristics 2-4 Interface Timing Chart |
| 3 | OPTICAL CHARACTERISTICS 3.1 Condition 3.2 Definition of Optical Characteristics |
| 4 | RELIABILITY |
| 5 | PRODUCT HANDLING AND APPLICATION |
| 6 | DATECODE |
| 7 | PACKING & LOTNO |
| 8 | INSPECTION STANDARD |

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM

HT5711LH-T

Page 2 of 22

1. BASIC SPECIFICATION

1.1 Mechanical specifications

| Items | Nominal Dimension | Unit |
|-------------------------|-----------------------|-------|
| Active screen size | 5.7" diagonal | - |
| Dot Matrix | 640*RGB*480 | Pixel |
| Module Size (W x H x T) | 127.0 x 98.43 x 10.06 | mm. |
| Active Area (W x H) | 115.2 x 86.4 | mm. |
| Dot Size (W x H) | 0.18 x 0.18 | mm. |
| Color depth | 262K | color |
| Interface | Parallel 18-bit RGB | - |
| Driving IC Package | COG | - |

1.2 Display specification

| Display | Descriptions | Note |
|-------------------|---------------------|------|
| LCD Type | a-Si TFT | |
| LCD Mode | TN/Normal white | |
| Polarizer Mode | Transmissive | |
| Polarizer Surface | Normal | |
| Pixel arrangement | RGB-stripe | |
| Backlight Type | LED | |
| Viewing Direction | 6 O'clock Direction | |

* Color tone is slightly changed by temperature and driving voltage.

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION


HYES

LCM

HT5711LH-T

Page 3 of 22

1.3 Outline dimension

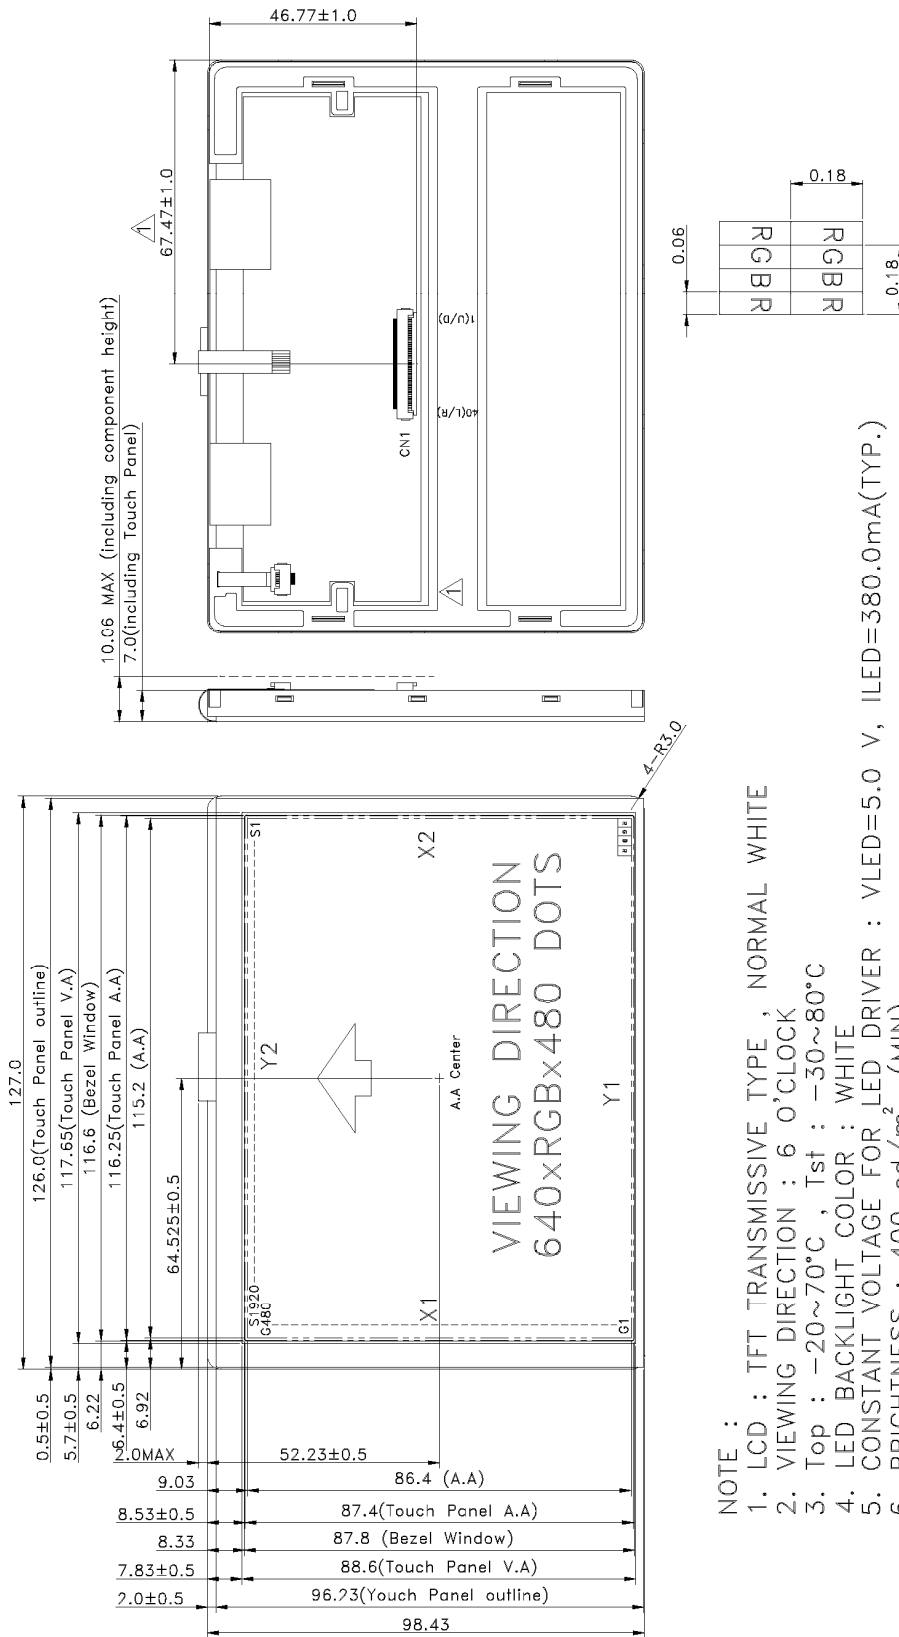

- NOTE :
1. LCD : TFT TRANSMISSIVE TYPE , NORMAL WHITE
 2. VIEWING DIRECTION : 6 O'CLOCK
 3. Top : -20~70°C , Tst : -30~80°C
 4. LED BACKLIGHT COLOR : WHITE
 5. CONSTANT VOLTAGE FOR LED DRIVER : VLED=5.0 V , ILED=380.0mA(TYP.)
 6. BRIGHTNESS : 400 cd/m² (MIN)
 7. TOLERANCE FOR NOT ASSIGNED : ±0.3mm
 8. RoHS-COMPLIANT
 9. CN1 : 6705-E40N-00R(E&T)
 10. CUSTOMER BEZEL WINDOW MUST BE SMALLER THAN TOUCH PANEL A.A.(116.25 mm X 87.4 mm)
 11. CUSTOMER CUSHION WINDOW MUST BE LARGER THAN TOUCH PANEL V.A.(117.65 mm X 88.6 mm)0.5 mm

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION


HYES

LCM

HT5711LH-T

Page 4 of 22

1.4 Block diagram:

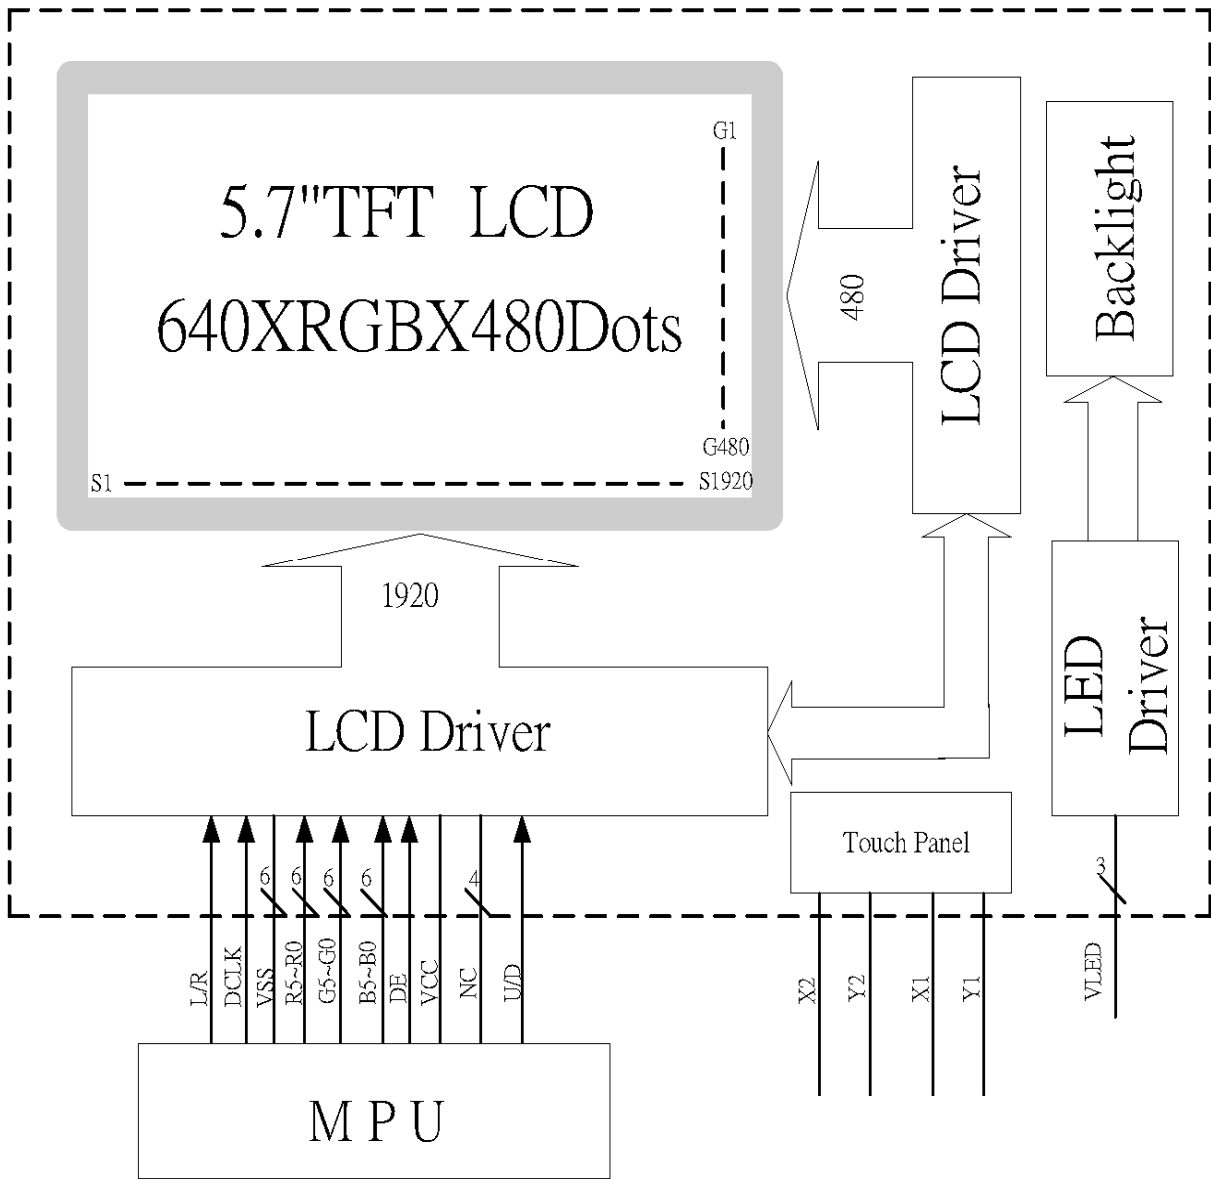

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM

HT5711LH-T

Page 5 of 22

1.5 Interface pin :

| Pin No. | Pin Symbol | I/O | Description |
|---------|------------|-----|---|
| 1 | U/D | I | Up or Down Display Control |
| 2~3 | NC | - | Customer non-connect. |
| 4~6 | VLED | P | Power supply for digital circuit LED.(+5.0V) |
| 7 | VCC | P | Power supply for digital circuit LCD. (+3.3V) |
| 8 | NC | - | Customer non-connect. |
| 9 | DE | I | Data enable |
| 10 | X2 | - | Touch Screen |
| 11 | Y1 | - | Touch Screen |
| 12 | NC | - | Customer non-connect. |
| 13 | B5 | I | Blue data input (MSB) |
| 14、15 | B4、B3 | I | Blue data input |
| 16 | VSS | P | Power ground |
| 17、18 | B2、B1 | I | Blue data input |
| 19 | B0 | I | Blue data input (LSB) |
| 20 | VSS | P | Power ground |
| 21 | G5 | I | Green data input (MSB) |
| 22、23 | G4、G3 | I | Green data input |
| 24 | VSS | P | Power ground |
| 25、26 | G2、G1 | I | Green data input |
| 27 | G0 | I | Green data input (LSB) |
| 28 | VSS | P | Power ground |
| 29 | R5 | I | Red data input (MSB) |
| 30、31 | R4、R3 | I | Red data input |
| 32 | VSS | P | Power ground |
| 33、34 | R2、R1 | I | Red data input |
| 35 | R0 | I | Red data input (LSB) |
| 36 | X1 | - | Touch Screen |
| 37 | Y2 | - | Touch Screen |
| 38 | DCLK | I | Clock signals. |
| 39 | VSS | P | Power ground |
| 40 | L/R | I | Left or Right Display Control |

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM

HT5711LH-T

Page 6 of 22

2. ELECTRICAL CHARACTERISTICS

2.1 Absolute Maximum Ratings

| Items | Symbol | Min. | Max. | Unit |
|---------------------------|-----------------|------|---------|------|
| Power supply voltage | VCC | -0.3 | 7.0 | V |
| Input voltage | V _{in} | -0.3 | VCC+0.3 | V |
| Operate temperature range | T _{OP} | -20 | 70 | °C |
| Storage temperature range | T _{ST} | -30 | 80 | °C |

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION



LCM

HT5711LH-T

Page 7 of 22

2.2 DC Characteristics

 $T_a = 25^\circ\text{C}$

| Items | Symbol | Min. | Typ. | Max. | Unit | Condition |
|---------------------|----------|-------------|------|-------------|------|-----------|
| Supply voltage | V_{CC} | - | 3.3 | - | V | - |
| Input Voltage | V_{IL} | 0 | - | $0.3V_{CC}$ | V | L level |
| | V_{IH} | $0.7V_{CC}$ | - | V_{CC} | V | H level |
| Current consumption | I_{CC} | - | - | 135 | mA | Note 1 |

*Note1 :

Measuring Condition:

Standard Value MAX

$T_a = 25^\circ\text{C}$

$V_{CC} - \text{GND} = 3.3\text{V}$

Display Pattern = Check pattern



0 gray black pattern

2-2.1 Back-light Characteristics

| PARAMETER | SYMBOL | MIN | TYP | MAX | Unit | Test Condition | NOTE |
|----------------|-----------|-----|-------|-----|------|--------------------------|------|
| Supply Current | I_{LED} | - | 380 | 760 | mA | $T_a = 25^\circ\text{C}$ | - |
| Supply Voltage | V_{LED} | - | 5 | - | V | $T_a = 25^\circ\text{C}$ | - |
| Half-Life Time | L_f | - | 10000 | - | hrs | $T_a = 25^\circ\text{C}$ | 1 |

Note 1 : The " Half-Life Time " is defined as the module brightness decrease to 50% original brightness.

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM

HT5711LH-T

Page 8 of 22

2.3 AC Characteristics

Digital Parallel RGB interface (1920x480 resolution)

| PARAMETER | Symbol | Spec. | | | Unit |
|-------------------------------|-----------|-------|--------|------|-----------|
| | | Min. | Typ. | Max. | |
| CLK frequency | F_{CPH} | - | 25.175 | - | MHz |
| CLK period | T_{CPH} | - | 39.7 | - | ns |
| CLK pulse duty | T_{CWH} | 40 | 50 | 60 | % |
| HS period | T_H | - | 800 | - | T_{CPH} |
| HS pulse width | T_{WH} | 5 | 30 | - | T_{CPH} |
| HS-first horizontal data time | T_{HS} | 112 | 144 | 175 | T_{CPH} |
| DEN pulse width | T_{EP} | - | 640 | - | T_{CPH} |
| VS pulse width | T_{WV} | 1 | 3 | 5 | T_H |
| VS-DEN time | T_{STV} | - | 35 | - | T_H |
| VS period | T_V | - | 525 | - | T_H |

Note: When SYNC mode is used, 1st data start from 144th CLK after HS falling (when $STHD[5:0]=00000$)

| PARAMETER | Symbol | Spec. | | | Unit |
|-----------------|------------|-------|------|------|-----------|
| | | Min. | Typ. | Max. | |
| OEV pulse width | T_{OEV} | - | 100 | - | T_{CPH} |
| CKV pulse width | T_{CKV} | - | 96 | - | T_{CPH} |
| HS-CKV time | T_1 | - | 52 | - | T_{CPH} |
| HS-OEV time | T_2 | - | 8 | - | T_{CPH} |
| HS-POL time | T_3 | - | 72 | - | T_{CPH} |
| STV setup time | T_{SUV} | - | 46 | - | T_{CPH} |
| STV pulse width | T_{WSTV} | - | 1 | - | T_H |

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION




LCM


HT5711LH-T

Page 9 of 22

2-4 Interface Timing Chart

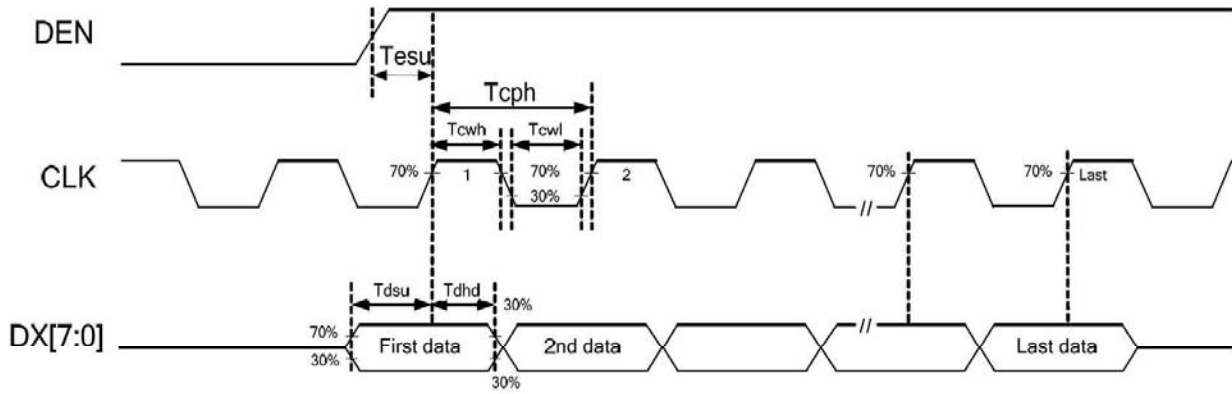

2-4-1 Data input format for RGB Mode

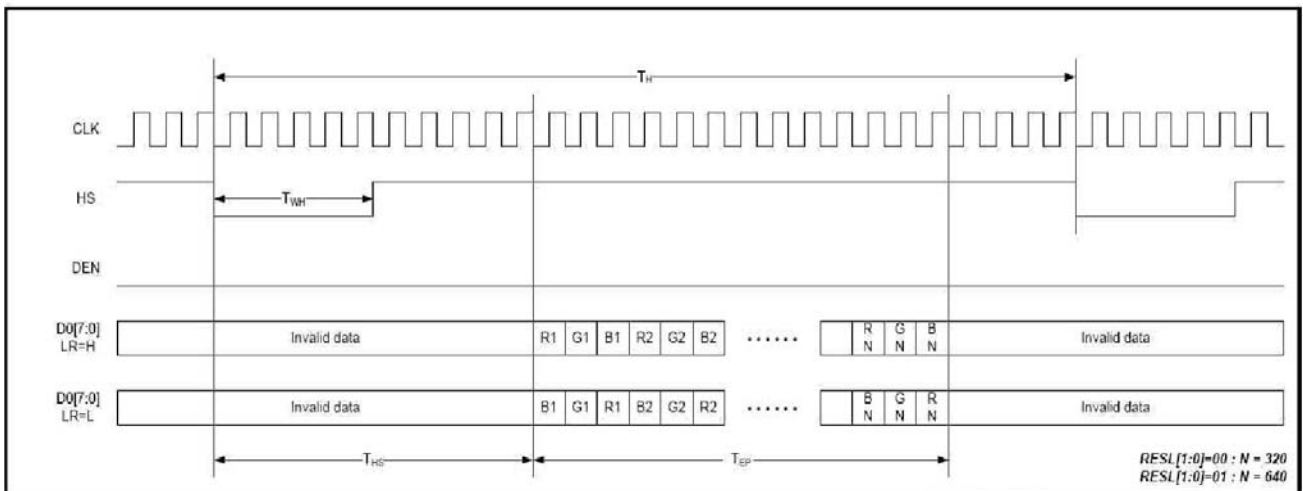

3. OPTICAL CHARACTERISTICS

3.1 Characteristics

Electrical and Optical Characteristics

| No. | Item | symbol / temp. | Min. | Typ. | Max. | Unit | Note | | |
|-----|-----------------------|----------------|---------------|------------------|------|------|------|--------|-------------------|
| 1 | Response Time | Tr | 25 °C | - | 15 | - | ms | 2 | |
| | | Tf | 25 °C | - | 35 | - | | | |
| 2 | Viewing Angle | Hor. | Θ_{x+} | Center CR>=10 | 60 | 75 | - | degree | 3 |
| | | | Θ_{x-} | | 60 | 75 | - | | |
| | | Ver. | Θ_{Y+} | | 45 | 60 | - | | |
| | | | Θ_{Y-} | | 60 | 75 | - | | |
| 3 | Contrast Ratio | Cr | 25 °C | 250 | 350 | - | - | 4 | |
| 4 | Red x-code | Rx | 25 °C | 0.57 | 0.62 | 0.67 | - | 5 | |
| | Red y-code | Ry | | 0.31 | 0.36 | 0.41 | | | |
| | Green x-code | Gx | | 0.29 | 0.34 | 0.39 | | | |
| | Green y-code | Gy | | 0.51 | 0.56 | 0.61 | | | |
| | Blue x-code | Bx | | 0.09 | 0.14 | 0.19 | | | |
| | Blue y-code | By | | 0.09 | 0.14 | 0.19 | | | |
| | White x-code | Wx | | 0.29 | 0.34 | 0.39 | | | |
| | White y-code | Wy | | 0.32 | 0.37 | 0.42 | | | |
| | Brightness | Y | | 350 | 500 | - | | | cd/m ² |
| 5 | Brightness Uniformity | | 25 °C | 80 | - | - | % | 6 | |

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM


HT5711LH-T

Page 11 of 22


3.2 Definition of optical characteristics

Measurement condition :


Transmissive and Transflective type

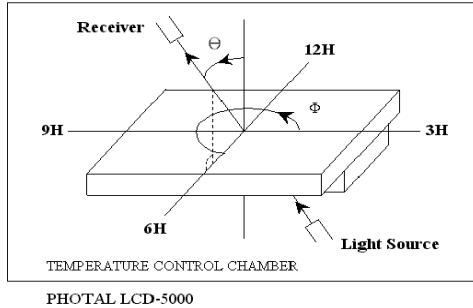

[Note 1] Definition of LCD Driving Vop and Waveform :


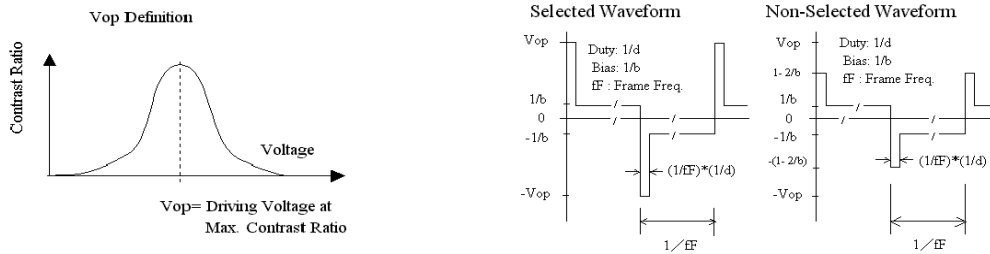


[Note 2] Definition of Response Time

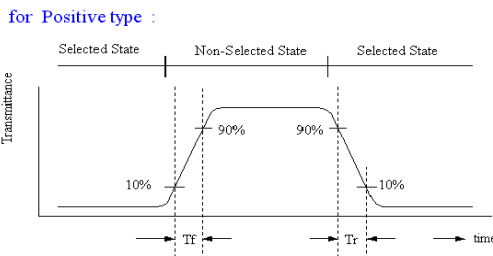

[Note 3] Definition of Viewing Angle :

[Note 4] Definition of Contrast Ratio :

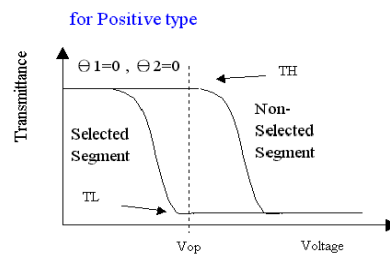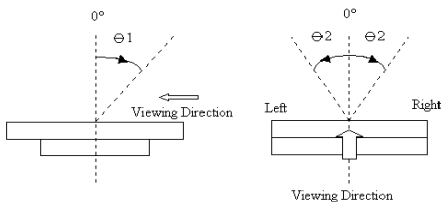

$$\text{Contrast Ratio} = \frac{TH}{TL}$$

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION




LCM


HT5711LH-T

Page 12 of 22

[Note 5] Definition of measurement of Color Chromaticity and Brightness

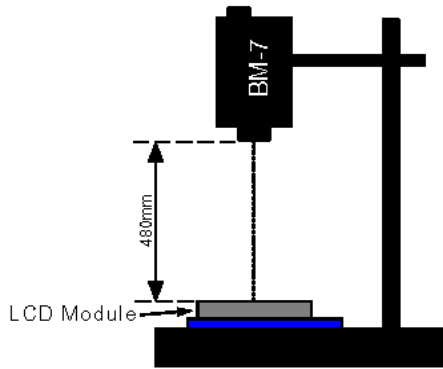


[Note 6] Definition of Brightness Uniformity

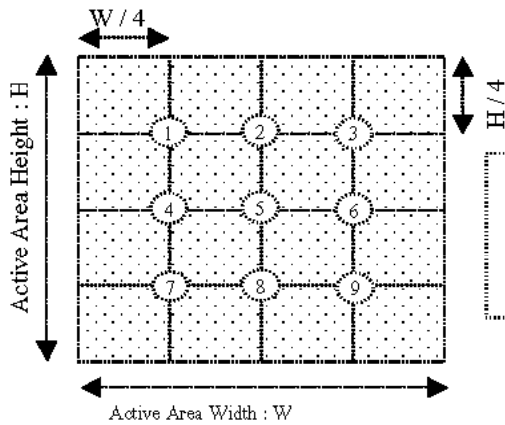

$$\text{Brightness Uniformity} = \frac{\text{Minimum Brightness of Point 1~9}}{\text{Maximum Brightness of Point 1~9}}$$

[Note 7] Definition of Measurement of Reflectance

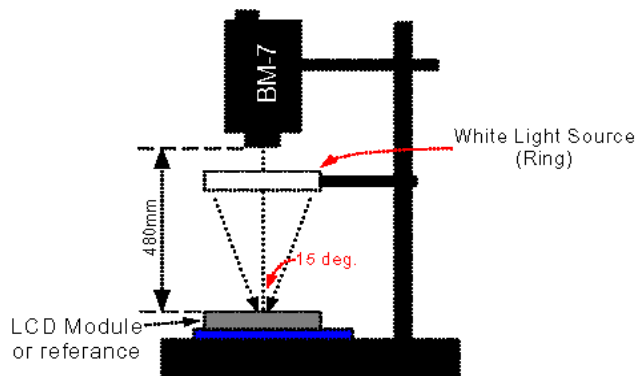

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM

HT5711LH-T

Page 13 of 22

4. RELIABILITY :

| Item No | Items | Condition |
|---------|-------------------------------------|--|
| 1 | High temperature operating | 70 °C , 200 hours |
| 2 | Low temperature operating | -20 °C , 200 hours |
| 3 | High temperature storage | 80 °C , 200 hours |
| 4 | Low temperature storage | -30 °C , 200 hours |
| 5 | High temperature & humidity storage | 60°C, 90%RH, 100 hours |
| 6 | Thermal Shock storage | -30°C, 30min.<=> 80°C, 30min. 10 Cycles |
| 7 | Vibration test | 10 => 55 =>10 => 55 => 10 Hz , within 1 minute Amplitude : 1.5mm. 15 minutes for each Direction (X,Y,Z) |
| 8 | Drop test | Packed, 100CM free fall, 6 sides, 1 corner, 3edges |
| 9 | Life time | 50,000 hours 25°C , 70%RH below , specification condition driving |

- * One single product test for only one item.
- * Judgment after test : keep in room temperature for more than 2 hours.
 - Current consumption < 2 times of initial value
 - Contrast > 1/2 initial value
 - Function : work normally

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM

HT5711LH-T

Page 14 of 22

5. PRODUCT HANDLING AND APPLICATION

PRECAUTION FOR HANDLING LCM

- The LCD module contains a C-MOS LSI. People who operate the LCM should wear ESD protection equipment to prevent ESD hurt on products.
- Do not input any signal before power is turned on.
- Do not take LCM from its packaging bag until it is assembled.
- Peel off the LCM protective film slowly since static electricity may be generated.
- Pay attention to the humidity of the work shop, 50~60%RH is satisfactory.
- Use a non-leak iron for soldering LCM.
- Do not touch the display surface or connection terminals area with bare hands. Smudges on the display surface reduce the insulation between terminals.
- Cautions for soldering to LCM:
 Condition for soldering I/O terminals:
 Temperature at iron tip :280°C±10°C.
 Soldering time : 3~4sec./ terminals.
 Type of solder : Eutectic solder(rosin flux filled).

PRECAUTION IN USE OF LCD

- Do not contact or scratch the front surface and the contact pads of a LCD panel with hard materials such as metal or glass or with one's nail.
- To clean the surface , wipe it gently with soft cloth dampened by alcohol.
- Do not attempt to wipe off the contact pads.
- Keep LCD panels away from direct sunlight , also avoid them in high-temperature & high humidity environment for a long period.
- Do not drive LCD panels by DC voltage.
- Do not expose LCD panels to organic solvent.
- Liquid in LCD is hazardous substance. In case a contact with liquid crystal material is occurred, be sure to immediately wash such material away by soap and water.
- The polarizer is easily damaged and should be handle with special care. Don't press or rub it with hard objects.

PRECAUTION FOR STORING LCM

- To avoid degradation of the device , do not store the module under the conditions of direct sunlight , high temperature or high humidity . Keep the module in bags designed to prevent static electricity charging under low temperature / normal humidity conditions(avoid high temperature / high humidity and low temperature below 0°C)

USING ON MEDICAL CARE , SAFETY OR HAZARDOUS APPLICATION OR SYSTEM

- For the application in medical care, safety and hazardous products or systems, an authorization from **HYES** is required. **HYES** will not responsible for any damage or loss which caused by the products without any authorization given by **HYES**.
- This product is not allowed to be designed and used for military application and/or purpose.
- The delivery of this product to the countries and/or regions where the embargoes are imposed by U.N. is prohibited.

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION



LCM

HT5711LH-T

Page 15 of 22

6. DATE CODE OF PRODUCTS

- Date code will be shown on each product :

- **Y MM DD - XXX**

Year Month Day - Production lots

- Example: 2 1 2 2 3 - 0 0 3 ==> Year 2002, Dec.,23rd , Batch no.03

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES


LCM

HT5711LH-T


Page 16 of 22

7. PACKING



Instruction of lot number:

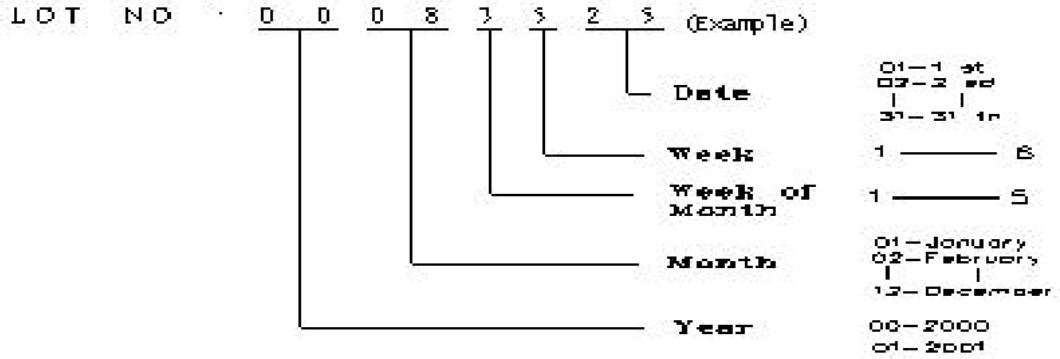

Label of carton:

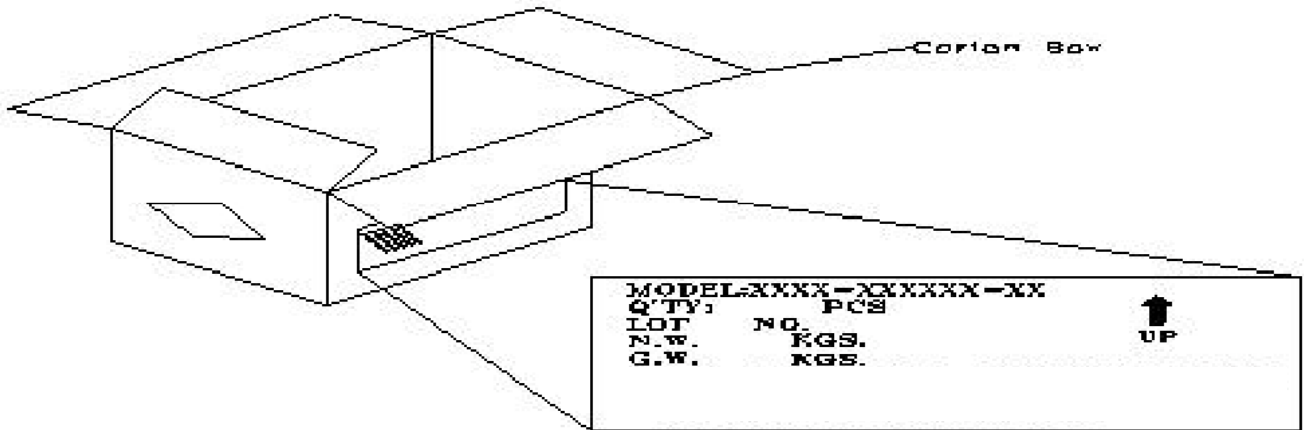

Packing tray must be stacked with alternated direction to each others.
 To tacks packing trays in same direction will cause product damaged.

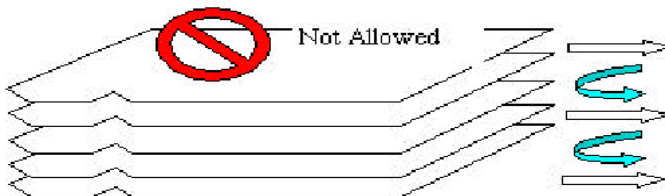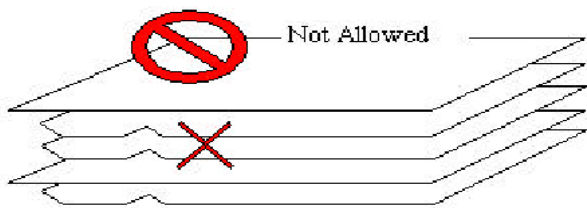

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM


HT5711LH-T

Page 17 of 22

NOTE:

- (1) Be warned, the direction of the tray has to turn it by 180 degree before stack it up. Otherwise, it will be packager's responsibility!!
- (2) Safe Stack : 5 cartons only

TBD pcs / Tray
TBD Tray / Box
TBD Box / Carton
TBD pcs / Carton

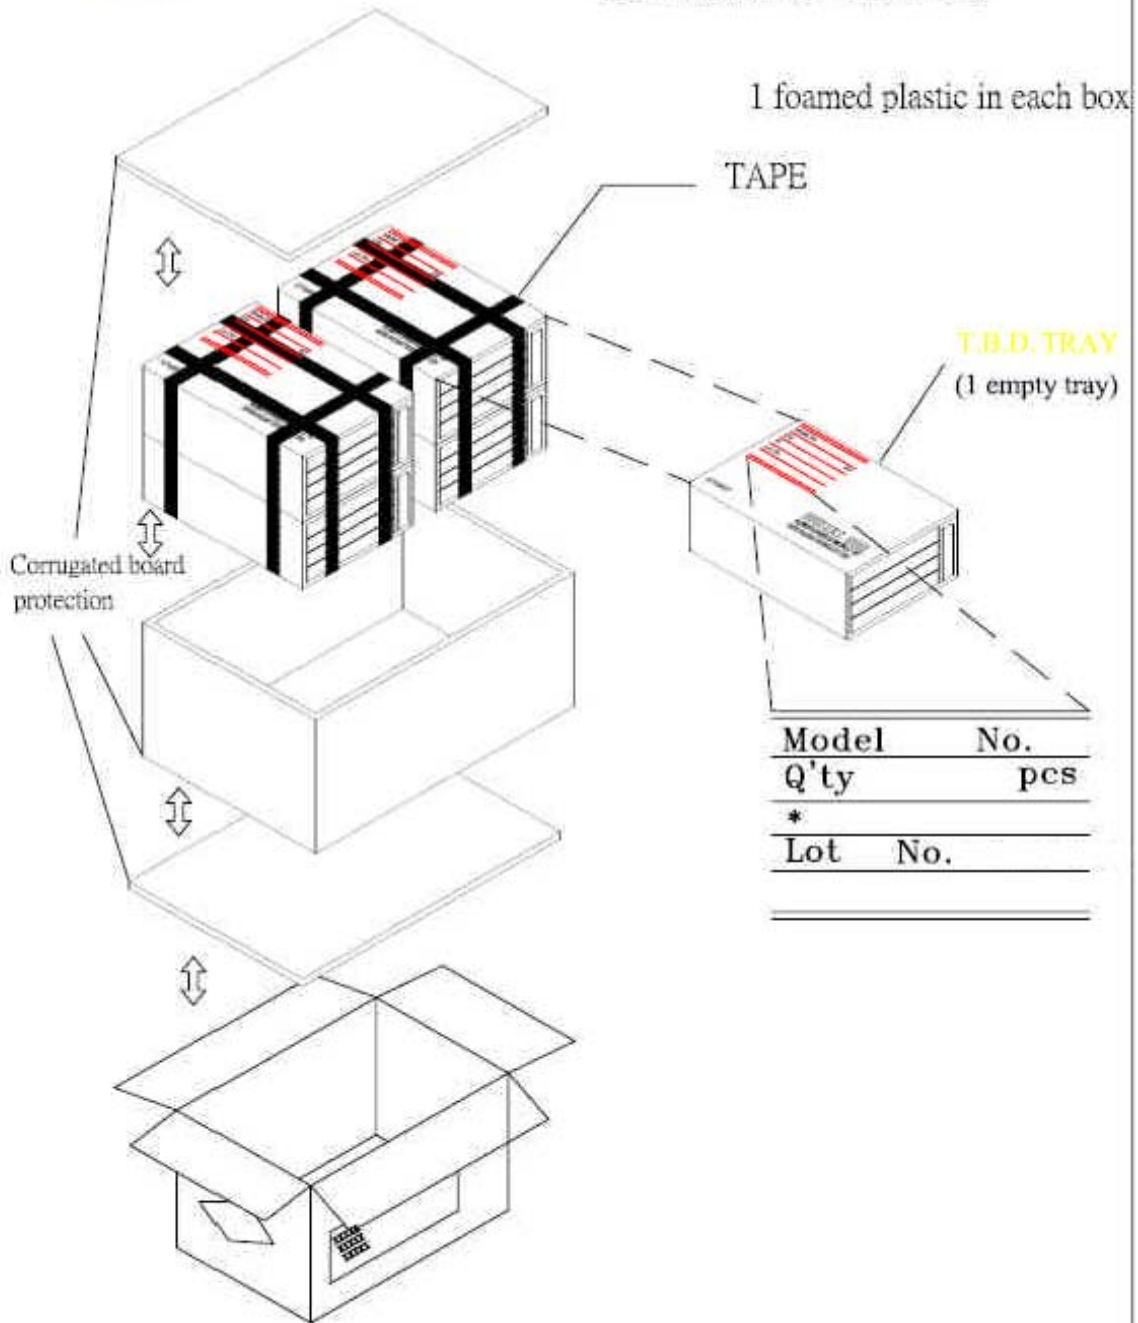

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM

HT5711LH-T

Page 18 of 22

8. INSPECTION STANDARD

8.1. QUALITY :

THE QUALITY OF GOODS SUPPLIED TO PURCHASER SHALL COME UP TO THE FOLLOWING STANDARD.

8.1.1. THE METHOD OF PRESERVING GOODS

AFTER DELIVERY OF GOODS FROM **HYES** TO PURCHASER. PURCHASER SHALL CONTROL THE LCM AT -10 °C ~ 40 °C ,AND IT MIGHT BE DESIRABLE TO KEEP AT THE NORMAL ROOM TEMPERATURE AND HUMIDITY UNTIL INCOMING INSPECTION OR THROWING INTO PROCESS LINE.

8.1.2. INCOMING INSPECTION

(A) THE METHOD OF INSPECTION

IF PURCHASER MAKE AN INCOMING INSPECTION , A SAMPLING PLAN SHALL BE APPLIED ON THE CONDITION THAT QUALITY OF ONE DELIVERY SHALL BE REGARDED AS ONE LOT.

(B) THE STANDARD OF QUALITY

ISO-2859-1 (or MIL-STD-105D), LEVEL II SINGLE PLAN.

| CLASS | AQL(%) |
|----------|--------|
| CRITICAL | 0.4 % |
| MAJOR | 0.65 % |
| MINOR | 1.5 % |
| TOTAL | 1.5 % |

EVERY ITEM SHALL BE INSPECTED ACCORDING TO THE CLASS.

(C) MEASURE

IF AS THE RESULT OF ABOVE RECEIVING INSPECTION , A LOT OUT IS DISCOVERED.

PURCHASER SHALL BE INFORM SELLER OF IT WITHIN SEVEN DAYS. BUT FIRST SHIPMENT WITHIN FOURTEEN DAYS.

8.1.3. WARRANTY POLICY

HYES WILL PROVIDE ONE-YEAR WARRANTY FOR THE PRODUCTS ONLY IF UNDER SPECIFICATION OPERATING CONDITIONS. **HYES** WILL REPLACE NEW PRODUCTS FOR THESE DEFECT PRODUCTS WHICH UNDER WARRANTY PERIOD AND BELONG TO THE RESPONSIBILITY OF **HYES**.

8.2. CHECKING CONDITION

8.2.1. CHECKING DIRECTION SHALL BE IN THE 45 DEGREE AREA TO FACE THE SAMPLE.

8.2.2. CHECKER SHALL SEE OVER 30 cm. WITH BARE EYES FAR FROM SAMPLE AND USING 2 PCS. OF 20W FLUORESCENT LAMP.

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM

HT5711LH-T

Page 19 of 22

8.3. INSPECTION PLAN :

| CLASS | ITEM | JUDGEMENT | CLASS |
|-----------------------|---|--|----------|
| PACKING & INDICATE | 1. OUTSIDE AND INSIDE PACKAGE | "MODEL NO.", "LOT NO." AND "QUANTITY" SHOULD INDICATE ON THE PACKAGE. | Minor |
| | 2. MODEL MIXED AND QUANTITY | OTHER MODEL MIXED.....REJECTED QUANTITY SHORT OR OVER.....REJECTED | Critical |
| | 3. PRODUCT INDICATION | "MODEL NO." SHOULD INDICATE ON THE PRODUCT | Major |
| ASSEMBLY | 4. DIMENSION, LCD GLASS SCRATCH AND SCRIBE DEFECT. | ACCORDING TO SPECIFICATION OR DRAWING. | Major |
| APPEARANCE | 5. VIEWING AREA | POLARIZER EDGE OR LCD'S SEALING LINE IS VISABLE IN THE VIEWING AREAREJECTED | Minor |
| | 6. BLEMISH - BLACK SPOT - WHITE SPOT IN THE LCD AND LCD GLASS CRACKS | ACCORDING TO STANDARD OF VISUAL INSPECTION (INSIDE VIEWING AREA) | Minor |
| | 7. BLEMISH - BLACK SPOT WHITE SPOT AND SCRATCH ON THE POLARIZER | ACCORDING TO STANDARD OF VISUAL INSPECTION (INSIDE VIEWING AREA) | Minor |
| | 8. BUBBLE IN POLARIZER | ACCORDING TO STANDARD OF VISUAL INSPECTION (INSIDE VIEWING AREA) | Minor |
| | 9. LCD'S RAINBOW COLOR | STRONG DEVIATION COLOR (OR NEWTON RING) OF LCD.....REJECTED. OR ACCORDING TO LIMITED SAMPLE (IF NEEDED, AND INSIDE VIEWING AREA) | Minor |
| ELECTRICAL | 10. ELECTRICAL AND OPTICAL CHARACTERISTICS (CONTRAST - VOP - CHROMATICITY ... ETC) | ACCORDING TO SPECIFICATION OR DRAWING . (INSIDE VIEWING AREA) | Critical |
| | 11. MISSING PATTERN | MISSING DOT - LINE - CHARACTERREJECTED | Critical |
| | 12. SHORT CIRCUIT - WRONG PATTERN DISPLAY | NON DISPLAY - WRONG PATTERN DISPLAY - CURRENT CONSUMPTION OUT OF SPECIFICATION..... REJECTED | Critical |
| | 13. PIN HOLE - PATTERN DEFORMITY | ACCORDING TO STANDARD OF VISUAL INSPECTION | Minor |

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION


HYES

LCM

HT5711LH-T

Page 20 of 22

8.4. STANDARD OF VISUAL INSPECTION

| NO. | CLASS | ITEM | JUDGEMENT | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------|----------------------|---|---|----------------|-----------------|------------------|-----------|------------------------|---|------------------------|---|---------------|---|--------|-------|-----------------|-------|---------------|-----------|--------------|----------------------|---|--------------|----------------------|---|-------|------------|-------------------|
| 8.4.1 | MINOR | · BLEMISH · BLACK SPOT · WHITE SPOT IN THE LCD. · BLEMISH · BLACK SPOT · WHITE SPOT AND SCRATCH ON THE POLARIZER | (A) ROUND TYPE: unit : mm. <table border="1" style="width: 100%;"> <thead> <tr> <th>DIAMETER (mm.)</th> <th>ACCEPTABLE Q'TY</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.1$</td> <td>DISREGARD</td> </tr> <tr> <td>$0.1 < \Phi \leq 0.2$</td> <td>2</td> </tr> <tr> <td>$0.2 < \Phi \leq 0.25$</td> <td>1</td> </tr> <tr> <td>$0.25 < \Phi$</td> <td>0</td> </tr> </tbody> </table> NOTE: $\Phi = (\text{LENGTH} + \text{WIDTH}) / 2$ (B) LINER TYPE: unit : mm. <table border="1" style="width: 100%;"> <thead> <tr> <th>LENGTH</th> <th>WIDTH</th> <th>ACCEPTABLE Q'TY</th> </tr> </thead> <tbody> <tr> <td>-----</td> <td>$W \leq 0.03$</td> <td>DISREGARD</td> </tr> <tr> <td>$L \leq 5.0$</td> <td>$0.03 < W \leq 0.05$</td> <td>3</td> </tr> <tr> <td>$L \leq 5.0$</td> <td>$0.05 < W \leq 0.07$</td> <td>1</td> </tr> <tr> <td>-----</td> <td>$0.07 < W$</td> <td>FOLLOW ROUND TYPE</td> </tr> </tbody> </table> | DIAMETER (mm.) | ACCEPTABLE Q'TY | $\Phi \leq 0.1$ | DISREGARD | $0.1 < \Phi \leq 0.2$ | 2 | $0.2 < \Phi \leq 0.25$ | 1 | $0.25 < \Phi$ | 0 | LENGTH | WIDTH | ACCEPTABLE Q'TY | ----- | $W \leq 0.03$ | DISREGARD | $L \leq 5.0$ | $0.03 < W \leq 0.05$ | 3 | $L \leq 5.0$ | $0.05 < W \leq 0.07$ | 1 | ----- | $0.07 < W$ | FOLLOW ROUND TYPE |
| DIAMETER (mm.) | ACCEPTABLE Q'TY | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\Phi \leq 0.1$ | DISREGARD | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.1 < \Phi \leq 0.2$ | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.2 < \Phi \leq 0.25$ | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.25 < \Phi$ | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LENGTH | WIDTH | ACCEPTABLE Q'TY | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ----- | $W \leq 0.03$ | DISREGARD | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $L \leq 5.0$ | $0.03 < W \leq 0.05$ | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $L \leq 5.0$ | $0.05 < W \leq 0.07$ | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ----- | $0.07 < W$ | FOLLOW ROUND TYPE | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8.4.2 | MINOR | BUBBLE IN POLARIZER | unit : mm. <table border="1" style="width: 100%;"> <thead> <tr> <th>DIAMETER</th> <th>ACCEPTABLE Q'TY</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.15$</td> <td>DISREGARD</td> </tr> <tr> <td>$0.15 < \Phi \leq 0.5$</td> <td>2</td> </tr> <tr> <td>$0.5 < \Phi$</td> <td>0</td> </tr> </tbody> </table> | DIAMETER | ACCEPTABLE Q'TY | $\Phi \leq 0.15$ | DISREGARD | $0.15 < \Phi \leq 0.5$ | 2 | $0.5 < \Phi$ | 0 | | | | | | | | | | | | | | | | | |
| DIAMETER | ACCEPTABLE Q'TY | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\Phi \leq 0.15$ | DISREGARD | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.15 < \Phi \leq 0.5$ | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.5 < \Phi$ | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8.4.3 | MINOR | PIN HOLE · PATTERN DEFORMITY | unit : mm.  <table border="1" style="width: 100%;"> <thead> <tr> <th>DIAMETER</th> <th>ACC. Q'TY</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.1$</td> <td>DISREGARD</td> </tr> <tr> <td>$0.1 < \Phi \leq 0.25$</td> <td>3</td> </tr> <tr> <td>$0.25 < \Phi$</td> <td>0</td> </tr> </tbody> </table> <p>$\Phi = (a+b)/2$</p> | DIAMETER | ACC. Q'TY | $\Phi \leq 0.1$ | DISREGARD | $0.1 < \Phi \leq 0.25$ | 3 | $0.25 < \Phi$ | 0 | | | | | | | | | | | | | | | | | |
| DIAMETER | ACC. Q'TY | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $\Phi \leq 0.1$ | DISREGARD | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.1 < \Phi \leq 0.25$ | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| $0.25 < \Phi$ | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Date : Jan. 07, 2009








TECHNICAL SPECIFICATION

HYES

LCM

HT5711LH-T

Page 21 of 22
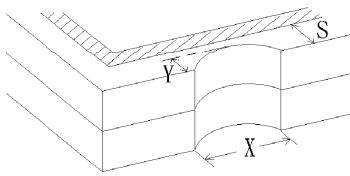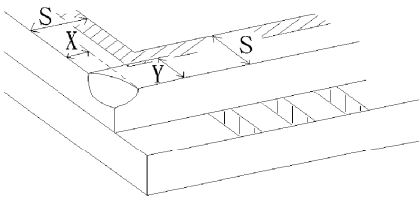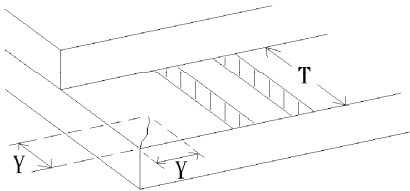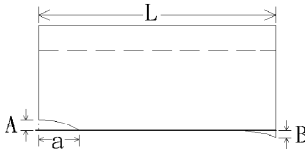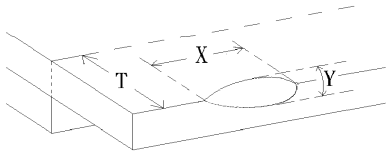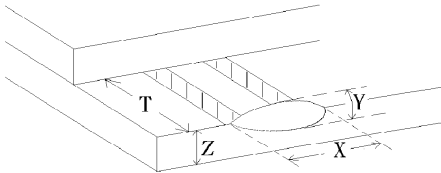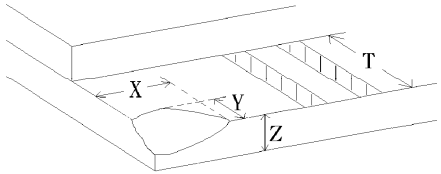
| NO. | CLASS | ITEM | JUDGEMENT |
|--------|-------|---|---|
| 8.4.4 | MINOR | CHIPPING |  <p>$Y > S$</p> <p>REJ.</p> |
| 8.4.5 | MINOR | CHIPPING |  <p>$X \text{ or } Y > S$</p> <p>REJ.</p> |
| 8.4.6 | MAJOR | GLASS CRACK |  <p>$Y > (1/2) T$</p> <p>REJ.</p> |
| 8.4.7 | MAJOR | SCRIBE DEFECT |  <p>1. $a > L/3$, $A > 1.5\text{mm}$. REJ.</p> <p>2. B : ACCORDING TO DIMENSION</p> |
| 8.4.8 | MINOR | CHIPPING (ON THE TERMINAL AREA) |  <p>$\Phi = (x+y)/2 > 2.5 \text{ mm}$</p> <p>REJ.</p> |
| 8.4.9 | MINOR | CHIPPING (ON THE TERMINAL SURFACE) |  <p>$Y > (1/3) T$</p> <p>REJ.</p> |
| 8.4.10 | MINOR | CHIPPING |  <p>$Y > T$</p> <p>REJ.</p> |

Date : Jan. 07, 2009

TECHNICAL SPECIFICATION

HYES

LCM

HT5711LH-T

Page 22 of 22