



# HUR29100, HUR29120

High-Performance Wide Temperature Range Ultra Fast Recovery Epitaxial Diode



A=Anode, C=Cathode, TAB=Cathode

Dimensions TO-220AC

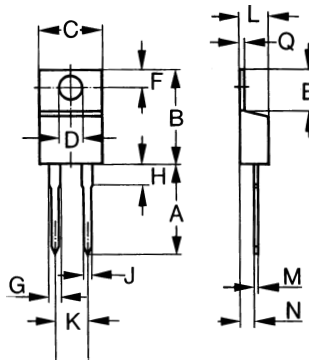

| Dim. | Inches |       | Millimeter |       |
|------|--------|-------|------------|-------|
|      | Min.   | Max.  | Min.       | Max.  |
| A    | 0.500  | 0.580 | 12.70      | 14.73 |
| B    | 0.560  | 0.650 | 14.23      | 16.51 |
| C    | 0.380  | 0.420 | 9.66       | 10.66 |
| D    | 0.139  | 0.161 | 3.54       | 4.08  |
| E    | 2.300  | 0.420 | 5.85       | 6.85  |
| F    | 0.100  | 0.135 | 2.54       | 3.42  |
| G    | 0.045  | 0.070 | 1.15       | 1.77  |
| H    | -      | 0.250 | -          | 6.35  |
| J    | 0.025  | 0.035 | 0.64       | 0.89  |
| K    | 0.190  | 0.210 | 4.83       | 5.33  |
| L    | 0.140  | 0.190 | 3.56       | 4.82  |
| M    | 0.015  | 0.022 | 0.38       | 0.56  |
| N    | 0.080  | 0.115 | 2.04       | 2.49  |
| Q    | 0.025  | 0.055 | 0.64       | 1.39  |

|                 | $V_{RSM}$ | $V_{RRM}$ |
|-----------------|-----------|-----------|
|                 | V         | V         |
| <b>HUR29100</b> | 1000      | 1000      |
| <b>HUR29120</b> | 1200      | 1200      |

| Symbol                             | Test Conditions                                                      | Maximum Ratings                 | Unit        |
|------------------------------------|----------------------------------------------------------------------|---------------------------------|-------------|
| $I_{FRMS}$<br>$I_{FAVM}$           | $T_C=115^{\circ}C$ ; rectangular, $d=0.5$                            | 35<br>30                        | A           |
| $I_{FSM}$                          | $T_{VJ}=45^{\circ}C$ ; $t_p=10ms$ (50Hz), sine                       | 200                             | A           |
| $E_{AS}$                           | $T_{VJ}=25^{\circ}C$ ; non-repetitive; $I_{AS}=11.5A$ ; $L=180\mu H$ | 14                              | mJ          |
| $I_{AR}$                           | $V_A=1.25 \cdot V_R$ typ.; $f=10kHz$ ; repetitive                    | 1.2                             | A           |
| $T_{VJ}$<br>$T_{VJM}$<br>$T_{stg}$ |                                                                      | -55...+175<br>175<br>-55...+150 | $^{\circ}C$ |
| $P_{tot}$                          | $T_C=25^{\circ}C$                                                    | 165                             | W           |
| $M_d$                              | mounting torque                                                      | 0.4...0.6                       | Nm          |
| Weight                             | typical                                                              | 2                               | g           |

**Sirectifier®**

# HUR29100, HUR29120

High-Performance Wide Temperature Range Ultra Fast Recovery Epitaxial Diode

| Symbol                                             | Test Conditions                                                                                                     | Characteristic Values |              | Unit     |
|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------|--------------|----------|
|                                                    |                                                                                                                     | typ.                  | max.         |          |
| <b>I<sub>R</sub></b>                               | T <sub>VJ</sub> =25°C; V <sub>R</sub> =V <sub>RRM</sub><br>T <sub>VJ</sub> =150°C; V <sub>R</sub> =V <sub>RRM</sub> |                       | 250<br>1     | uA<br>mA |
| <b>V<sub>F</sub></b>                               | I <sub>F</sub> =30A; T <sub>VJ</sub> =150°C<br>T <sub>VJ</sub> =25°C                                                |                       | 1.81<br>2.75 | V        |
| <b>R<sub>thJC</sub></b><br><b>R<sub>thCH</sub></b> |                                                                                                                     | 0.5                   | 0.9          | K/W      |
| <b>t<sub>rr</sub></b>                              | I <sub>F</sub> =1A; -di/dt=200A/us; V <sub>R</sub> =30V; T <sub>VJ</sub> =25°C                                      | 40                    |              | ns       |
| <b>I<sub>RM</sub></b>                              | V <sub>R</sub> =100V; I <sub>F</sub> =50A; -di <sub>F</sub> /dt=100A/us; T <sub>VJ</sub> =100°C                     | 5.5                   |              | A        |

## FEATURES

- \* International standard package
- \* Planar passivated chips
- \* Very short recovery time
- \* Extremely low switching losses
- \* Low I<sub>RM</sub>-values
- \* Soft recovery behaviour
- \* Epoxy meets UL 94V-0

## APPLICATIONS

- \* Antiparallel diode for high frequency switching devices
- \* Antisaturation diode
- \* Snubber diode
- \* Free wheeling diode in converters and motor control circuits
- \* Rectifiers in switch mode power supplies (SMPS)
- \* Inductive heating
- \* Uninterruptible power supplies (UPS)
- \* Ultrasonic cleaners and welders

## ADVANTAGES

- \* Avalanche voltage rated for reliable operation
- \* Soft reverse recovery for low EMI/RFI
- \* Low I<sub>RM</sub> reduces:
  - Power dissipation within the diode
  - Turn-on loss in the commutating switch

**Sirectifier®**

# HUR29100, HUR29120

## High-Performance Wide Temperature Range Ultra Fast Recovery Epitaxial Diode

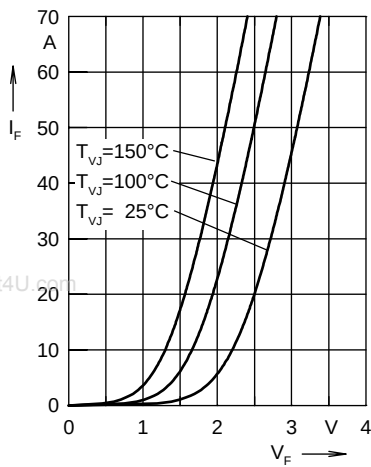


Fig. 1 Forward current  $I_F$  versus  $V_F$

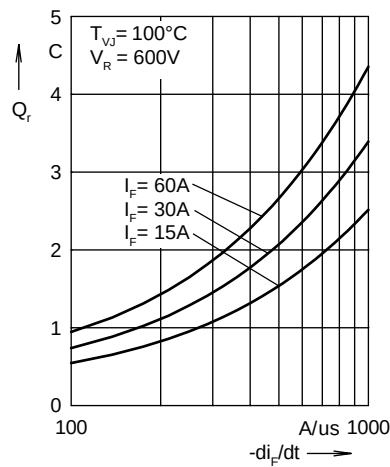


Fig. 2 Reverse recovery charge  $Q_r$  versus  $-di_F/dt$

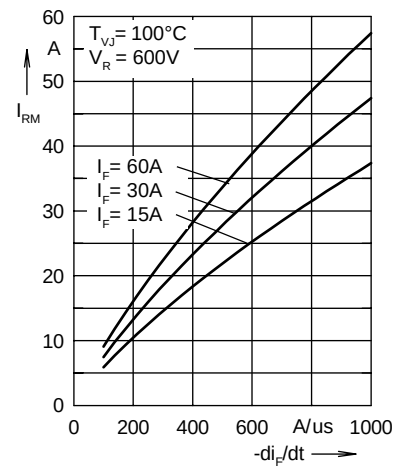


Fig. 3 Peak reverse current  $I_{RM}$  versus  $-di_F/dt$

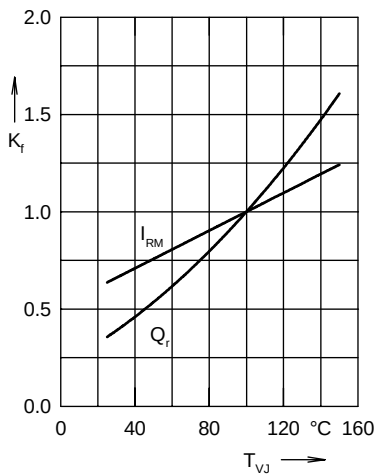


Fig. 4 Dynamic parameters  $Q_r$ ,  $I_{RM}$  versus  $T_{VJ}$

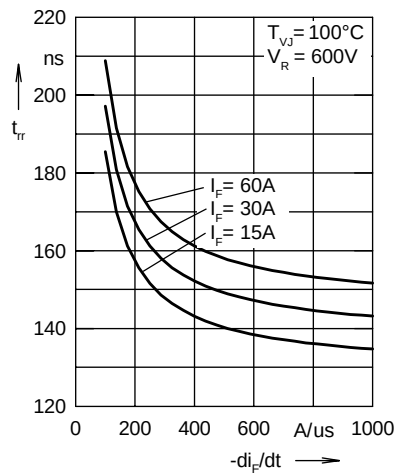


Fig. 5 Recovery time  $t_{tr}$  versus  $-di_F/dt$

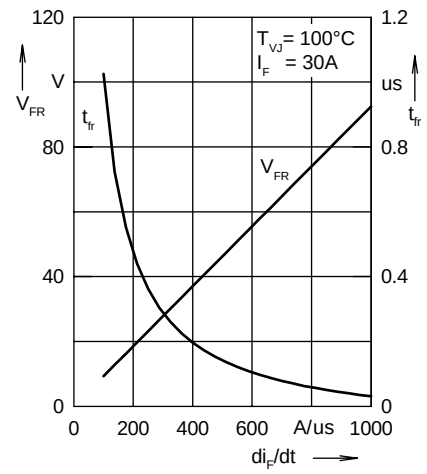


Fig. 6 Peak forward voltage  $V_{FR}$  and  $t_{tr}$  versus  $di_F/dt$

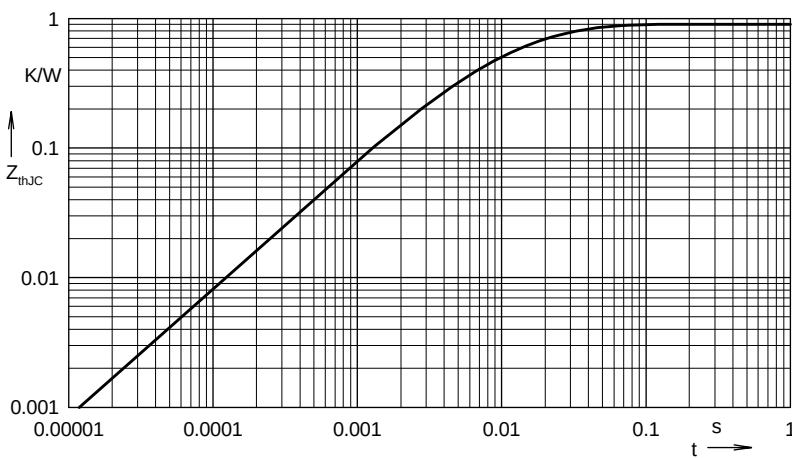


Fig. 7 Transient thermal resistance junction to case

Constants for  $Z_{thJC}$  calculation:

| i | $R_{thi}$ (K/W) | $t_i$ (s) |
|---|-----------------|-----------|
| 1 | 0.502           | 0.0052    |
| 2 | 0.193           | 0.0003    |
| 3 | 0.205           | 0.0162    |

**Sirectifier®**