



 京东方 BOE PROPRIETARY NOTE THIS SPECIFICATION IS THE PROPERTY OF BOE HF AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE OT AND MUST BE RETURNED TO BOE HF UPON ITS REQUEST.				
SPEC. NUMBER	PRODUCT GROUP	REV.	ISSUE DATE	PAGE
S864-6002	TFT-LCD	A	2011.1.20	1 OF 28
TITLE : HV320WXC-100 Product Specification Rev. A				

[illegible]

B2010-6011-O(2/3)

A4(210 X 297)



 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 3 OF 28

Contents


No	ITEM	Page
	REVISIONS HISTORY	2
	CONTENTS	3
1	GENERAL DESCRIPTION	4
	1.1 Introduction	
	1.2 Features	
	1.3 Applications	
	1.4 General Specification	
2	ABSOLUTE MAXIMUM RATINGS	6
3	ELECTRICAL SPECIFICATIONS	7
	3.1 TFT LCD Module	
	3.2 Inverter	
4	INTERFACE CONNECTION	9
	4.1 Module Input Signal & power	
	4.2 LVDS Interface	
	4.3 Inverter Input Signal & Power	
5	SIGNAL TIMING SPECIFICATIONS	12
	5.1 Timing Parameter	
	5.2 Signal Timing Waveform	
	5.3 Input Signals, Basic Display Colors & Cray Scale Of Colors	
	5.4 Power Sequence for LCD	
	5.5 Power Sequence for Inverter	
6	OPTICAL SPECIFICATIONS	17
7	MECHANICAL CHARACTERISTICS	19
8	RELIABILITY	20
9	PRODUCT SERIAL NUMBER	21
10	PACKING INFORMATION	22
11	HANDING & CAUTIONS	24
12	APPENDIX	25

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 4 OF 28

1.0 GENERAL DESCRIPTION

1.1 Introduction

HV320WXC-100 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 31.51 inch diagonally measured active area with WXGA resolutions (1366 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors. The TFT-LCD panel used for this module is adapted for a low reflection and higher color type.

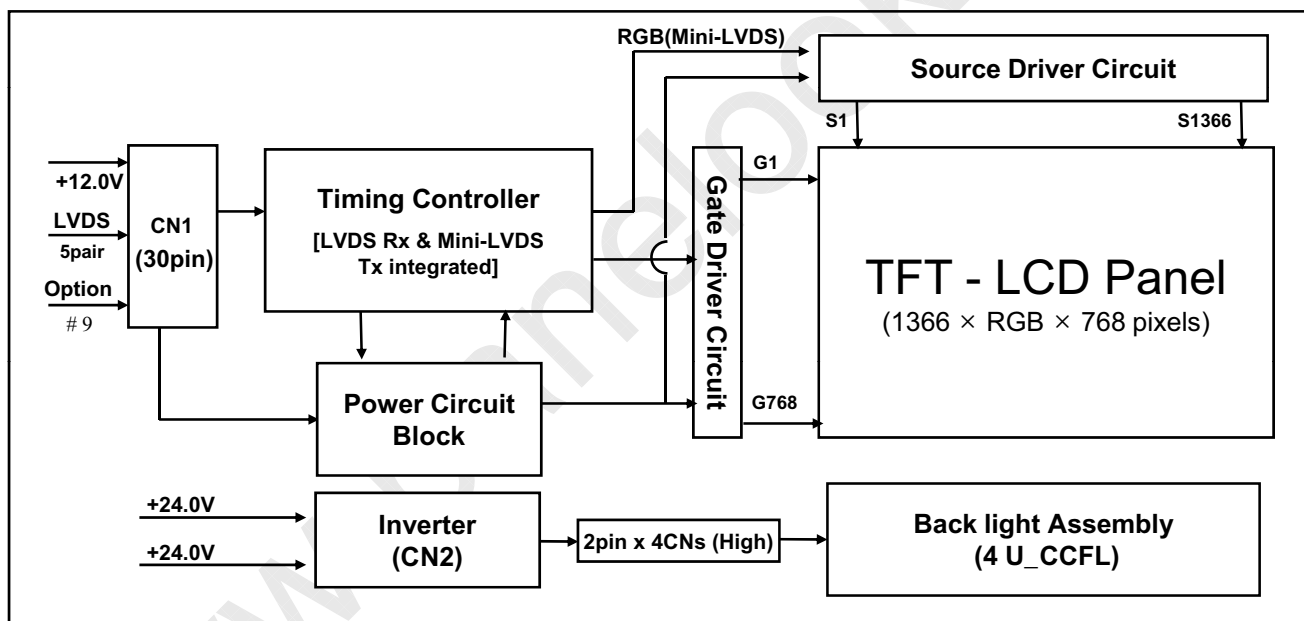

1.2 Features

- LVDS Interface with 1 pixel / clock
- High-speed response
- Lower Color shift Image Quality
- 8-bit color depth, display 16.7M colors
- High luminance and contrast ratio, low reflection and wide viewing angle
- DE (Data Enable) only mode
- AFFS technology is applied for high display quality
- RoHS Compliant



 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 5 OF 28

1.3 Application

- Home Alone Multimedia TFT-LCD TV
- Display Terminals for Control System
- High Definition TV(HD TV)
- AV application Products

1.4 General Specification

< Table 1. General Specifications >

Parameter	Specification	Unit	Remarks
Active area	697.685(H) × 392.256(V)	mm	
Number of pixels	1366(H) × 768(V)	pixels	
Pixel pitch	170.25(H) × 510.75(V) × RGB	μm	
Pixel arrangement	Pixels RGB stripe arrangement		
Display colors	16.7M(8bits-true)	colors	
Display mode	Transmission mode, Normally Black		
Outline Dimension	760.0(H) × 450.0(V) × 48.0(D) typ.	mm	
Weight	5300 (typ.)	gram	
Power Consumption	Total 80Watt (Typ.) (Logic= 3W, Lamp=7W [$I_{BL}=12mA$])	Watt	
Surface Treatment	Haze 10%, 3H, Semi-glare treatment (Front Polarizer)		

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 6 OF 28

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.


< Table 2. LCD Module Electrical Specifications >

[VSS=GND=0V]

Parameter		Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	LCD Module	V_{DD}	VSS-0.3	13.2	V	Ta = 25 °C
	Inverter	V_{BL}	VSS-0.3	26.4	V	
Operating Temperature		T_{OP}	0	+50	°C	1)
		T_{SUR}	0	+60	°C	
Storage Temperature		T_{ST}	-20	+60	°C	
Operating Ambient Humidity		Hop	10	80	%RH	
Storage Humidity		Hst	10	80	%RH	

Note : 1) Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39 °C max. and no condensation of water.

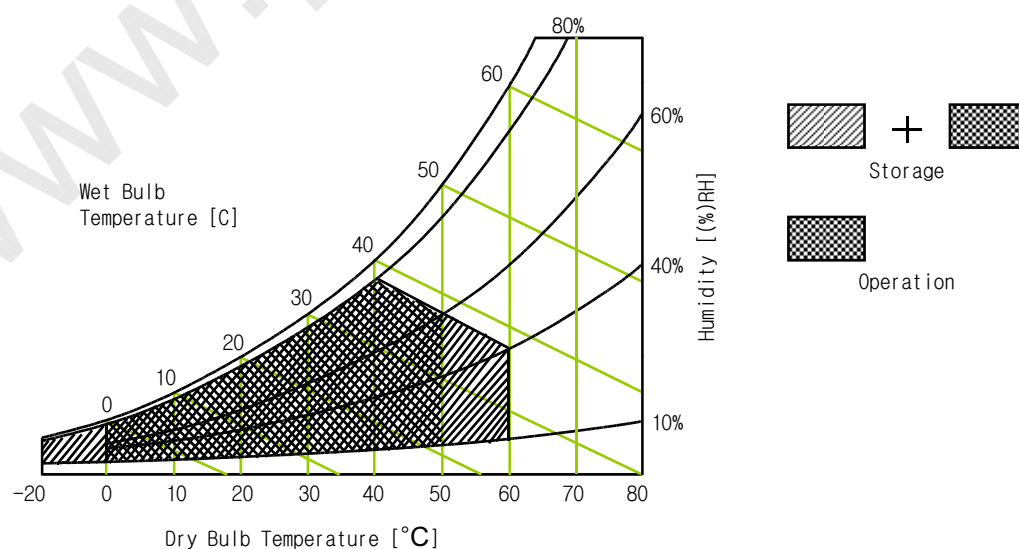

 京东方 BOE	PRODUCT GROUP		REV	ISSUE DATE
	TFT- LCD PRODUCT		A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification			PAGE 7 OF 28

3.0 ELECTRICAL SPECIFICATIONS

3.1 TFT LCD Module

< Table 3. LCD Module Electrical Specifications >

[Ta =25±2 ℃]

Parameter		Symbol	Values			Unit	Notes
			Min	Typ	Max		
Power Supply Input Voltage		VDD	10.8	12	13.2	Vdc	
Power Supply Ripple Voltage		VRP			300	mV	
Power Supply Current		IDD	200	250	350	mA	1
Power Consumption		PLCD	2	3	5	Watt	
Rush current		IRUSH	-	-	2.0	A	2
LVDS Interface	Differential Input High Threshold Voltage	VLVTH	+100			mV	
	Differential Input Low Threshold Voltage	VLVTL			-100	mV	
	Common Input Voltage	VLVC	1.0	1.2	1.4	V	
CMOS Interface	Input High Threshold Voltage	VIH	2.7	-	3.3	V	
	Input Low Threshold Voltage	VIL	0	-	0.7	V	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for VDD=12.0V, Frame rate=60Hz and

Clock frequency = 73.9MHz. Test Pattern of power supply current


a) Typ : Black Pattern

b) Max : Sub Dot Pattern

2. The duration of rush current is about 2ms and rising time of Power Input is 1ms(min)

White : 255Gray
Black : 0Gray

Mosaic Pattern(8 x 6)

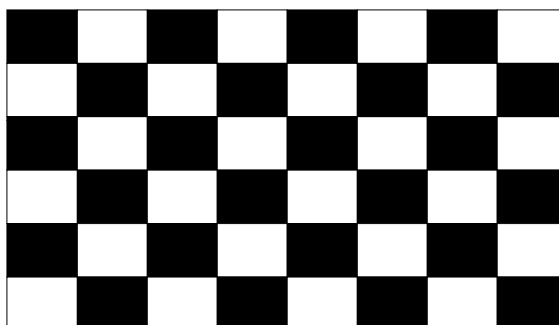

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification	PAGE 8 OF 28	


3.2 Inverter

< Table 4. Inverter Electrical Specifications >

Parameter	Symbol	Condition	Values			Unit	Notes
			Min.	Typ.	Max.		
Input Voltage	V _{BL}		22.8	24.0	25.2	V	
Input Current	I _{BL}	Vadim=3.3V	-	3.2	3.5	A	1
Rush current	IRUSH	V _{BL} = 24V	-	-	6	A	
Power Consumption	P _{BL}	Typ Luminance	-	77	85	Watt	
B/L on/off control	V _{ON/OFF}	Lamp ON = High	2	3.3	5	V	
		Lamp OFF =Low	0	-	0.8	V	
Analog Dimming	A _{DIM}	Min. Luminance	0			V	
		Max. Luminance	3.3				
PWM Frequency	F _{PWM}		140	190	240	Hz	
PWM Level	High Level		3.0	3.3	3.6	V	
	Low Level		0	-	0.3	V	
PWM Duty	D _{PWM}		10	-	100	%	2
Life Time			50,000	-	-	Hrs	3

Notes: 1.The specified current and power consumption are under the typical supply Input voltage, 24V. It is total power consumption.

2. High-duty = $\text{On}/(\text{On}+\text{Off}) * 100$

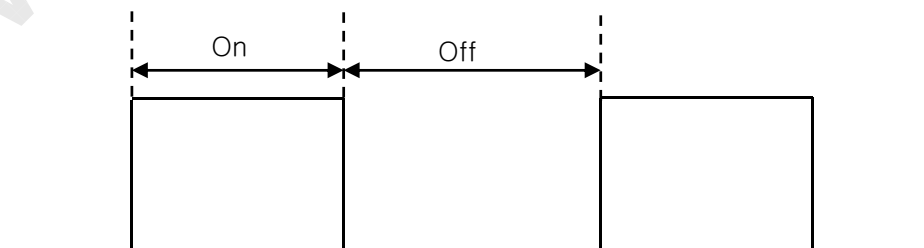

3. The life time of a Lamp, 50,000Hrs, is determined as the time at which luminance of the lamp is 50% compared to that of initial value at the typical lamp current on condition of continuous operating at $25 \pm 2^{\circ}\text{C}$.

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 9 OF 28

4.0 INTERFACE CONNECTION

4.1 Module Input Signal & Power

- Connector : IS100-L30B-C23(Manufactured by UJU) or Equivalent.

< Table 5. LCM Module Input Connector Pin Configuration >

Pin No	Symbol	Description	Pin No	Symbol	Description
1	VDD	Power Supply +12.0V	16	RX1+	LVDS Receiver Signal(+)
2	VDD	Power Supply +12.0V	17	GND	Ground
3	VDD	Power Supply +12.0V	18	RX2-	LVDS Receiver Signal(-)
4	VDD	Power Supply +12.0V	19	RX2+	LVDS Receiver Signal(+)
5	GND	Ground	20	GND	Ground
6	GND	Ground	21	RCLK-	LVDS Receiver Clock Signal(-)
7	GND	Ground	22	RCLK+	LVDS Receiver Clock Signal(+)
8	GND	Ground	23	GND	Ground
9	LVDS_SEL	'H'=JEIDA , 'L' or NC= VESA	24	RX3-	LVDS Receiver Signal(-)
10	NC	No Connection	25	RX3+	LVDS Receiver Signal(+)
11	GND	Ground	26	GND	Ground
12	RX0-	LVDS Receiver Signal(-)	27	NC	No Connection
13	RX0+	LVDS Receiver Signal(+)	28	NC	No Connection
14	GND	Ground	29	GND	Ground
15	RX1-	LVDS Receiver Signal(-)	30	GND	Ground

Notes : 1. NC(Not Connected) : This pins are only used for BOE internal operations.

2. Input Level of LVDS signal is based on the IEA 664 Standard.

3. LVDS_SEL : This pin is used for selecting LVDS signal data format.

If this Pin : Low (GND) or Open (NC) → Normal NS LVDS format

Otherwise : High (3.3V) → JEIDA LVDS format

Sequence : On = Vdd ≥ LVDS Option ≥ Interface signal

Off = Interface signal ≥ LVDS Option ≥ Vdd

Rear view of LCM





 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 10 OF 28

4.2 LVDS Interface

- LVDS Receiver : Timing Controller (LVDS Rx merged)
- LVDS Data : Pixel Data

< Table 6. LCM Module Input Connector Pin Configuration >

	LVDS Pin	Vesa Data format	JEIDA Data format	Remark
TxOUT/RxIN0	TxIN/RxOUT0	Red0 [LSB]	R2	
	TxIN/RxOUT1	Red1	R3	
	TxIN/RxOUT2	Red2	R4	
	TxIN/RxOUT3	Red3	R5	
	TxIN/RxOUT4	Red4	R6	
	TxIN/RxOUT6	Red5	R7 [MSB]	
	TxIN/RxOUT7	Green0 [LSB]	G2	
TxOUT/RxIN1	TxIN/RxOUT8	Green1	G3	
	TxIN/RxOUT9	Green2	G4	
	TxIN/RxOUT12	Green3	G5	
	TxIN/RxOUT13	Green4	G6	
	TxIN/RxOUT14	Green5	G7 [MSB]	
	TxIN/RxOUT15	Blue0 [LSB]	B2	
	TxIN/RxOUT18	Blue1	B3	
TxOUT/RxIN2	TxIN/RxOUT19	Blue2	B4	
	TxIN/RxOUT20	Blue3	B5	
	TxIN/RxOUT21	Blue4	B6	
	TxIN/RxOUT22	Blue5	B7 [MSB]	
	TxIN/RxOUT24	HSYNC	HSYNC	
	TxIN/RxOUT25	VSYNC	VSYNC	
	TxIN/RxOUT26	DEN	DEN	
TxOUT/RxIN3	TxIN/RxOUT27	Red6	R0 [LSB]	
	TxIN/RxOUT5	Red7 [MSB]	R1	
	TxIN/RxOUT10	Green6	G0 [LSB]	
	TxIN/RxOUT11	Green7 [MSB]	G1	
	TxIN/RxOUT16	Blue6	B0 [LSB]	
	TxIN/RxOUT17	Blue7 [MSB]	B1	
	TxIN/RxOUT23	Reserved	Reserved	

B2010-6011-O(3/3)

A4(210 X 297)

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification	PAGE 11 OF 28	

4.3 Inverter Input Signal & Power

- Connector : 20022WR_14AML(Yeonho) or equivalent

< Table 7. Inverter Input Connector Pin Configuration >

Pin No	Symbol	Description	Remarks
1	VBL	Power Supply +24V	
2	VBL	Power Supply +24V	
3	VBL	Power Supply +24V	
4	VBL	Power Supply +24V	
5	VBL	Power Supply +24V	
6	GND	Ground	
7	GND	Ground	
8	GND	Ground	
9	GND	Ground	
10	GND	Ground	
11	ERR	Normal (GND) / Abnormal (Open Collector)	
12	VON/OFF	Backlight ON/OFF control	(On :2.0V~5.0V/Off :0.0~0.8V)
13	I_PWM	Internal PWM control signal	(Max :3.3V / Min : 0.0V)
14	E_PWM	External PWM control signal	

Notice: 1. PIN 13:Internal PWM Control (Use Pin 13): Pin 14 must open.


PIN 14:External PWM Control (Use Pin 14): Pin 13 must open.

Pin 13(I_PWM) and Pin 14(E_PWM) can't open in same period.

2. While system is turned ON or OFF, the power sequences must follow as below descriptions:

Turn ON sequence: VBL → PWM signal → BLON

Turn OFF sequence: BLOFF → PWM signal → VBL

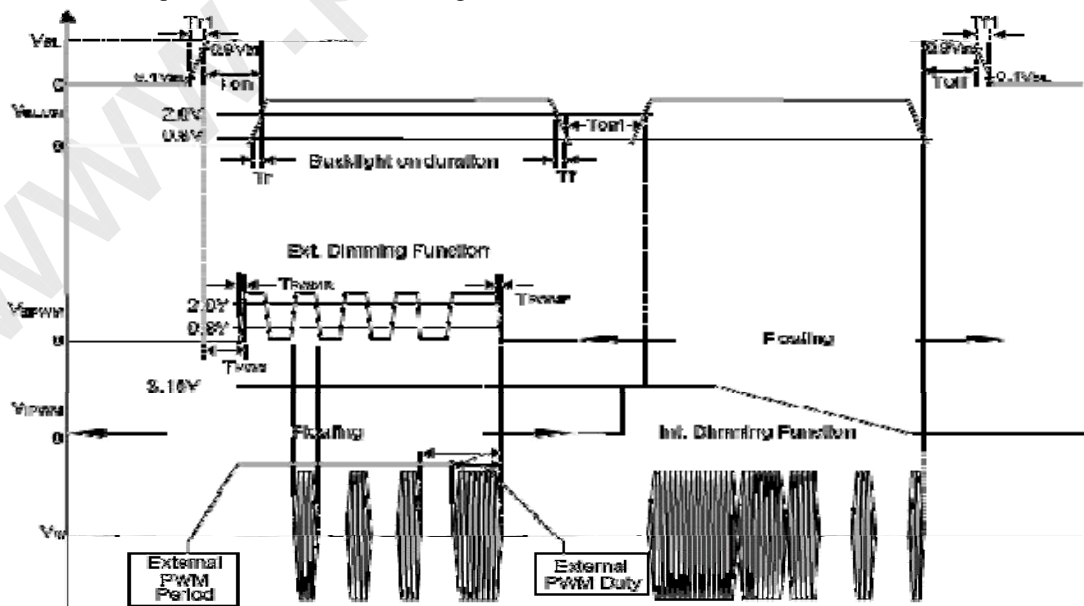



 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 12 OF 28

5.0 SIGNAL TIMING SPECIFICATION

5.1 Timing Parameters (DE only mode)



< Table 8. Timing Table >

ITEM	Symbol		Min	Typ	Max	Unit	Note
CLK	Period	t_{CLK}	11.8	13.5	16.7	ns	
	Frequency	-	60	73.9	85.0	MHz	
Hsync	Period	t_{HP}	1416	1560	1776	t_{CLK}	
	Frequency	f_H	39.4	47.4	53	KHz	
Vsync	Period	t_{VP}	775	790	1063	t_{HP}	
	Frequency	f_V	47	60	63	Hz	
Horizontal Active Display Term	Valid	t_{HV}	-	1366	-	t_{CLK}	
	Total	t_{HP}	1416	1560	1776	t_{CLK}	
Vertical Active Display Term	Valid	t_{VV}	-	768	-	t_{HP}	
	Total	t_{VP}	775	790	1063	t_{HP}	

Notes: This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification	PAGE 13 OF 28	

5.2 Signal Timing Waveform

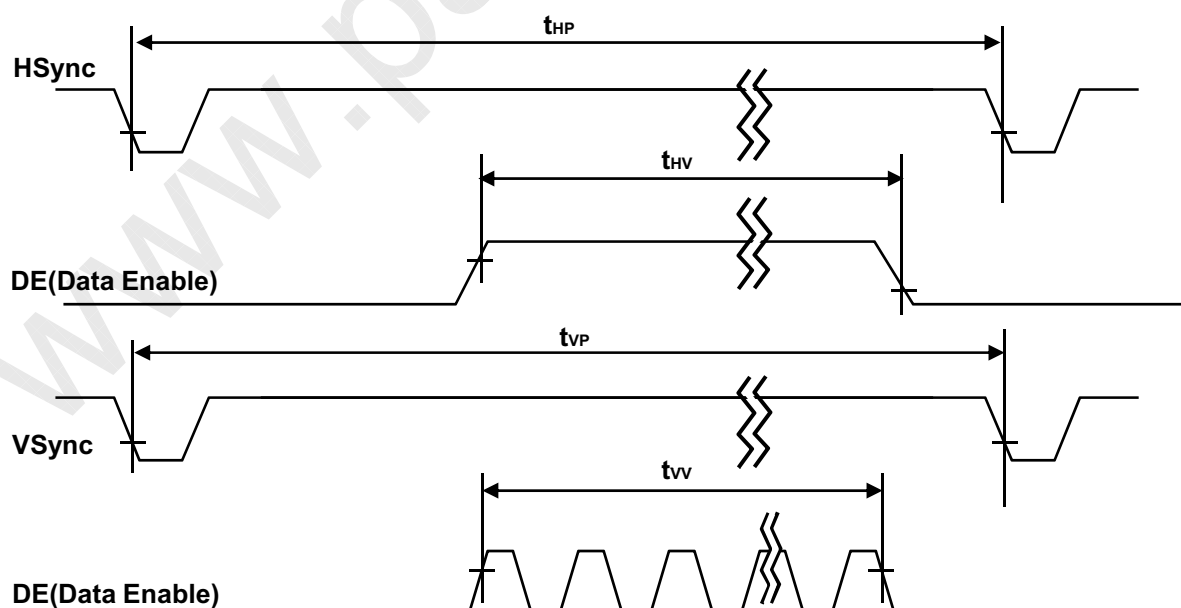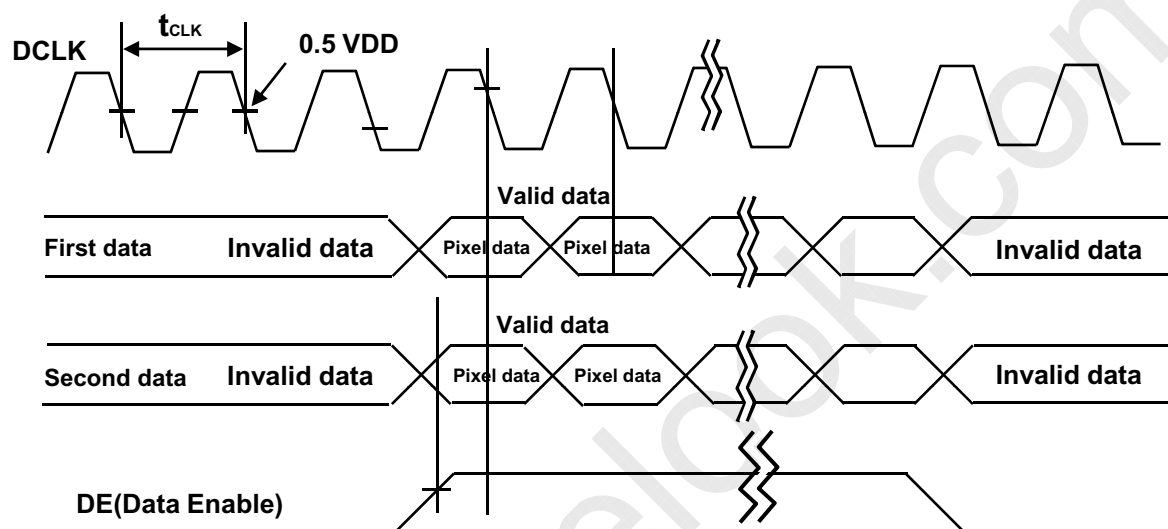



 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification	PAGE 14 OF 28	


5.3 Input Signals, Basic Display Colors & Gray Scale Of Colors

Color & Gray Scale		Input Data Signal																							
		Red Data								Green Data								Blue Data							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	▽	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Gray Scale of White	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1
	▽	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification	PAGE 15 OF 28	

5.4 Power Sequence for LCD

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

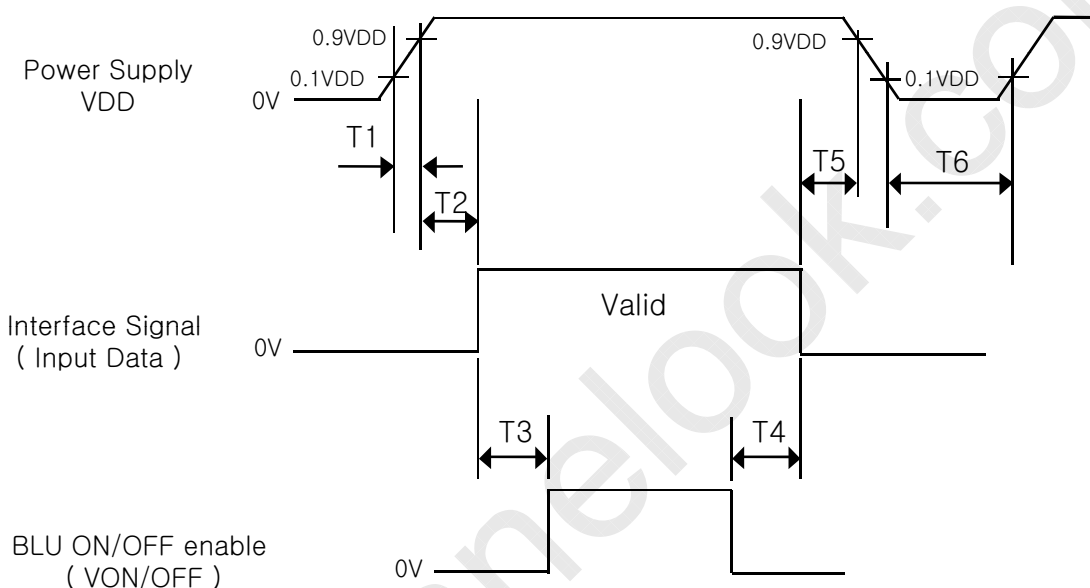


Parameter	Values			Units
	Min	Typ	Max	
T1	0.5	-	30	ms
T2	0.1	-	150	ms
T3	200	-	-	ms
T4	0	-	-	ms
T5	0	-	300	ms
T6	1	-	-	s

Notes:

1. When the power supply VDD is 0V, Keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on.
3. Back Light must be turn on after power for logic and interface signal are valid.

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 16 OF 28

5.5 Power Sequence for Inverter

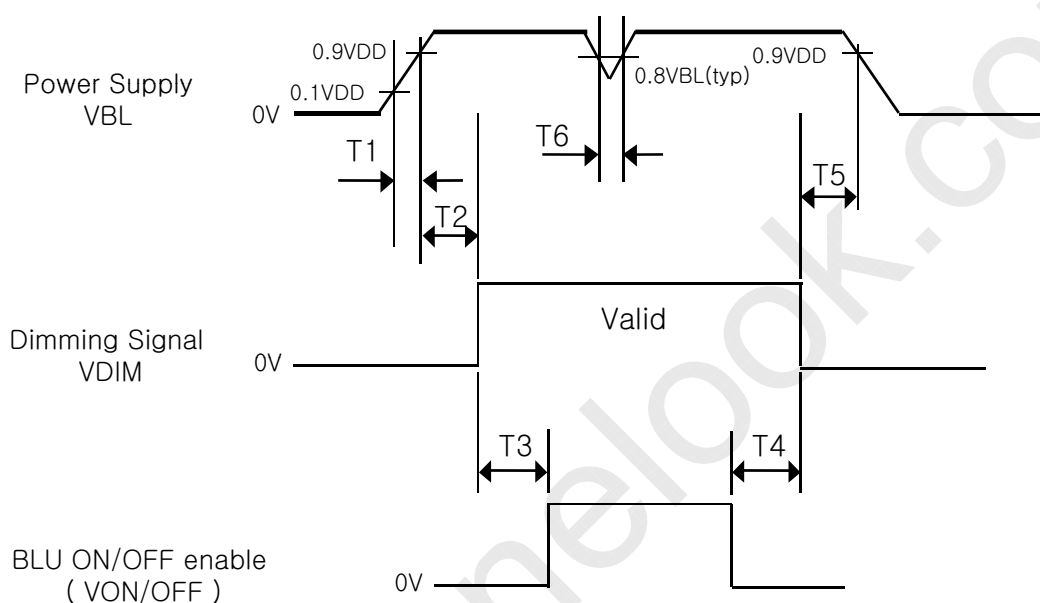

Parameter	Values			Units
	Min	Typ	Max	
T1	20	-	-	ms
T2	500	-	-	ms
T3	0	-	-	ms
T4	0	-	-	ms
T5	10	-	-	ms
T6	-	-	10	ms



 京东方 BOE	PRODUCT GROUP		REV	ISSUE DATE
	TFT- LCD PRODUCT		A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification			PAGE 17 OF 28

6.0 OPTICAL SPECIFICATION

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta_{\Phi=0} (= \theta_3)$ as the 3 o'clock direction (the "right"), $\theta_{\Phi=90} (= \theta_{12})$ as the 12 o'clock direction ("upward"), $\theta_{\Phi=180} (= \theta_9)$ as the 9 o'clock direction ("left") and $\theta_{\Phi=270} (= \theta_6)$ as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 12.0V $\pm 10\%$ at 25°C . Optimum viewing angle direction is 6 'clock.

[VDD = 12.0V, Frame rate = 60Hz, Ta = $25 \pm 2^\circ\text{C}$]

Parameter		Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	Θ_3	CR > 10		89		Deg.	Note 1
		Θ_9			89		Deg.	
	Vertical	Θ_{12}			89		Deg.	
		Θ_6			89		Deg.	
Color Temperature				-	10,000		K	
Color Gamut				70	72		%	
Contrast ratio		CR	$\Theta = 0^\circ$ (Center) Normal Viewing Angle	900:1	1200:1	-		Note 2
Luminance of White		Y_w		380	450	-	cd/m ²	Note 3
White luminance uniformity		ΔY		75	-		%	Note 4
Reproduction of color	White	W_x		TYP. - 0.03	0.279	TYP. + 0.03		Note 5
		W_y			0.292			
	Red	R_x			0.636			
		R_y			0.335			
	Green	G_x			0.291			
		G_y			0.603			
	Blue	B_x			0.146			
		B_y			0.061			
Response Time	G to G	T_g		-	8	10	ms	Note 6
Gamma Scale				2.0	2.2	2.4		



 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 18 OF 28

Note :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
2. Contrast measurements shall be made at viewing angle of $\theta = 0^\circ$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIGURE 1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
4. The White luminance uniformity on LCD surface is then expressed as :
 $\Delta Y = (\text{Minimum Luminance of 5points} / \text{Maximum Luminance of 5points}) * 100$
(See FIGURE 2 shown in Appendix).
5. The color chromaticity coordinates specified in Table 4. shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
6. The electro-optical response time measurements shall be made as FIGURE 3 shown in Appendix by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Td, and 90% to 10% is Tr.



 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 19 OF 28

7.0 MECHANICAL CHARACTERISTICS

7.1 Dimensional Requirements

FIGURE 4 (located in Appendix) shows mechanical outlines for the model HV320WXC-100. Other parameters are shown in Table 12.

<Table 12. Dimensional Parameters>

Parameter	Specification	Unit
Dimensional outline	760.0(H) × 450.0 (V) × 48.0 (D)	mm
Weight	5300 (typ)	gram
Active area	697.685 (H) × 392.256(V)	mm
Pixel pitch	0.51(H) × 0.51(V)	mm
Number of pixels	1366(H) × 768(V) (1 pixel = R + G + B dots)	pixels
Back-light	Direct Light 4 U_CCFL type	

7.2 Mounting

See FIGURE 5. (shown in Appendix)

7.3 Semi-Glare and Polarizer Hardness.

The surface of the LCD has an semi-glare coating to minimize reflection and a coating to reduce scratching.



 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 20 OF 28

8.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 13. Reliability Test Parameters >

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 °C, 80%RH, 240hrs
4	High temperature operation test	Ta = 50 °C, 240hrs
5	Low temperature operation test	Ta = 0 °C, 240hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle
7	Vibration test (non-operating)	Frequency : 10 ~ 300 Hz, Sweep rate 10 min Gravity / AMP : 1.5 G Sine Period : X, Y, Z 30 min
8	Shock test (non-operating)	Gravity : 50G Pulse width : 11msec, Sine wave ± X, ± Y, ± Z Once for each direction
9	Electro-static discharge test	Air : ± 15kV , 50pF/330Ω ,100Point ,1time/Point Contact : ± 8kV , 150pF/330Ω ,100Point , 1time/Point

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 21 OF 28

9.0 Product Serial Number



1	2	3	4	5	6	7
X X	X	X	X X	X	X X X X	X X X X X X

Type

- No 1. Control
- No 2. Rank
- No 3. Line Classification(BOE HYDIS : H, LCM : L, BOE OT : A/B/C)
- No 4. Year(2001 : 01, 2002 : 02, ...)
- No 5. Month(1, 2, 3, ...,9 X, Y, Z)
- No 6. FG Code
- No 7. Serial No.

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 22 OF 28

10.0 PACKING INFORMATION

BOE provides the standard shipping container for customers, unless customer specifies their packing information. The standard packing method and Barcode information are shown in below.

10.1 Packing Order

Put pads into the box



Put modules bundled with PE Bag into the box



Seal the box and stick label to the assigned area



Put cover pad on top of the box

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 23 OF 28

10.2 Packing Note

- Box Dimension : 874 × 284 × 545 mm
- Package Quantity in one Box : 4pcs

10.3 Box label

- Label Size : 108 mm (L) 56 mm (W)

- Contents

Model : HV320WXC


Q'ty : Module Q'ty in one box

Q'ty : 4 Module in one box.

Serial No. : Box Serial No. See next page for detail description.

Date : Packing Date

FG Code : FG Code of Product

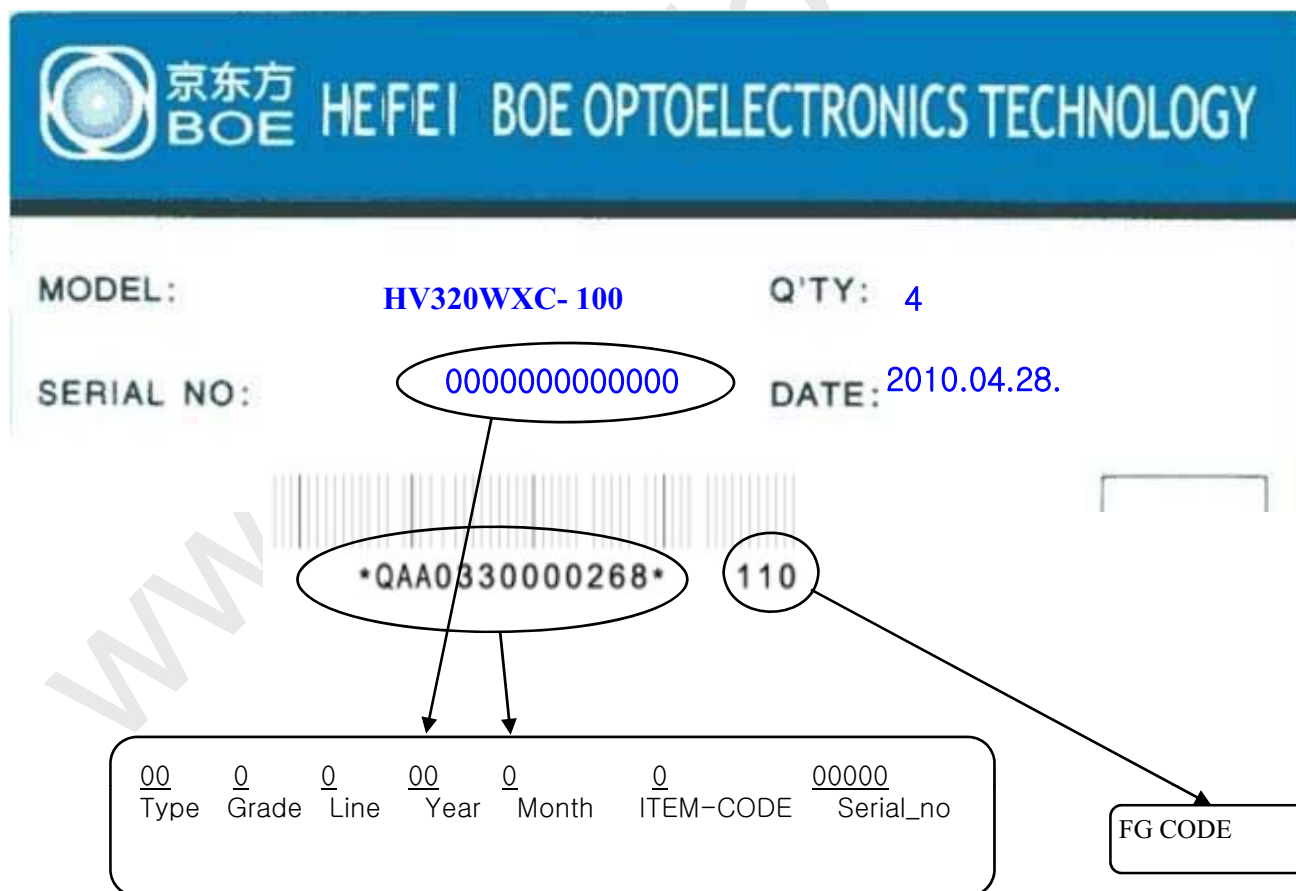

The image shows a box label for BOE Optoelectronics Technology. The label is blue and white. It contains the following information:

- MODEL: HV320WXC-100
- Q'TY: 4
- SERIAL NO: 000000000000
- DATE: 2010.04.28.

Below the main information, there is a barcode and a serial number: *QAA0330000268* 110. The serial number is circled, and an arrow points from it to a box containing the following information:

00	0	0	00	0	0	00000
Type	Grade	Line	Year	Month	ITEM-CODE	Serial_no

Below the box, there is a box labeled FG CODE.

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 24 OF 28

11.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the module
 - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module
 - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
 - As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
 - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
 - Do not pull the interface connector in or out while the LCD module is operating.
 - Put the module display side down on a flat horizontal plane.
 - Handle connectors and cables with care.
- (3) Cautions for the operation
 - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
 - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- (4) Cautions for the atmosphere
 - Dew drop atmosphere should be avoided.
 - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics
 - Do not apply fixed pattern data signal to the LCD module at product aging.
 - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions
 - Do not disassemble and/or re-assemble LCD module.
 - Do not re-adjust variable resistor or switch etc.
 - When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification	PAGE 25 OF 28	

12.0 APPENDIX

Figure 1. Measurement Set Up



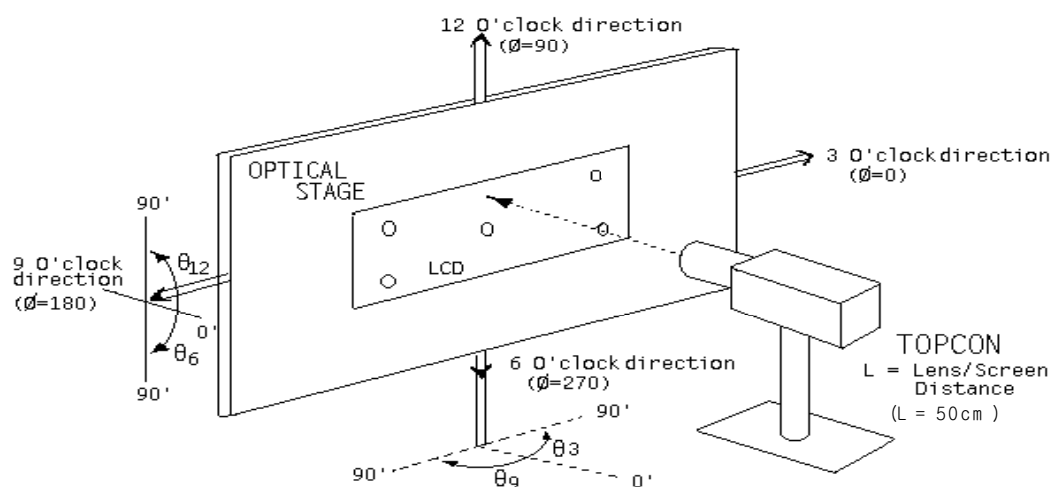


Figure 2. White Luminance and Uniformity Measurement Locations

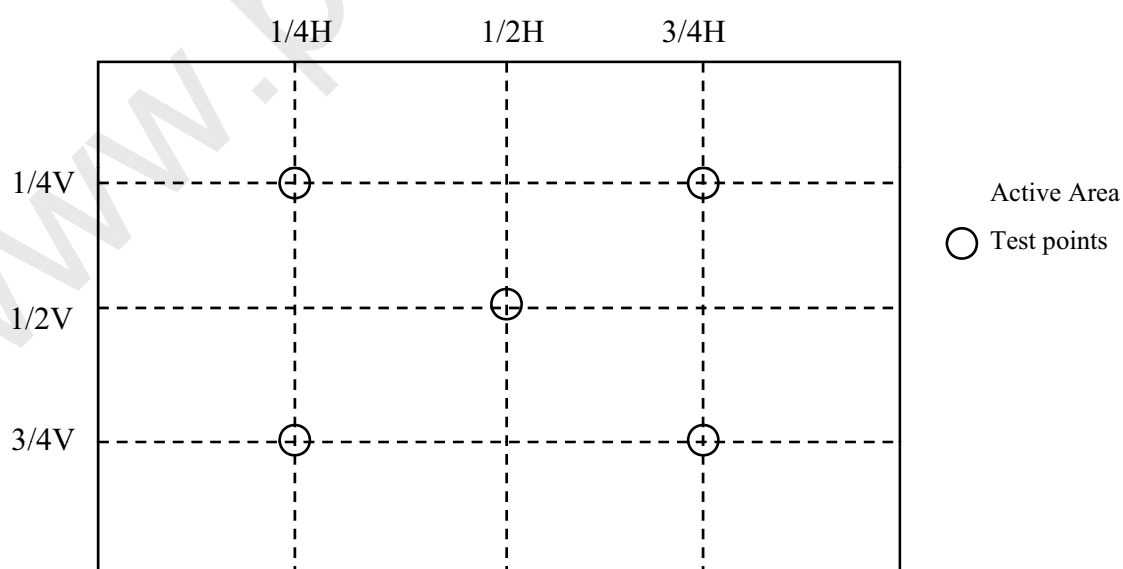


 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification		PAGE 26 OF 28

Figure 3. Response Time Testing

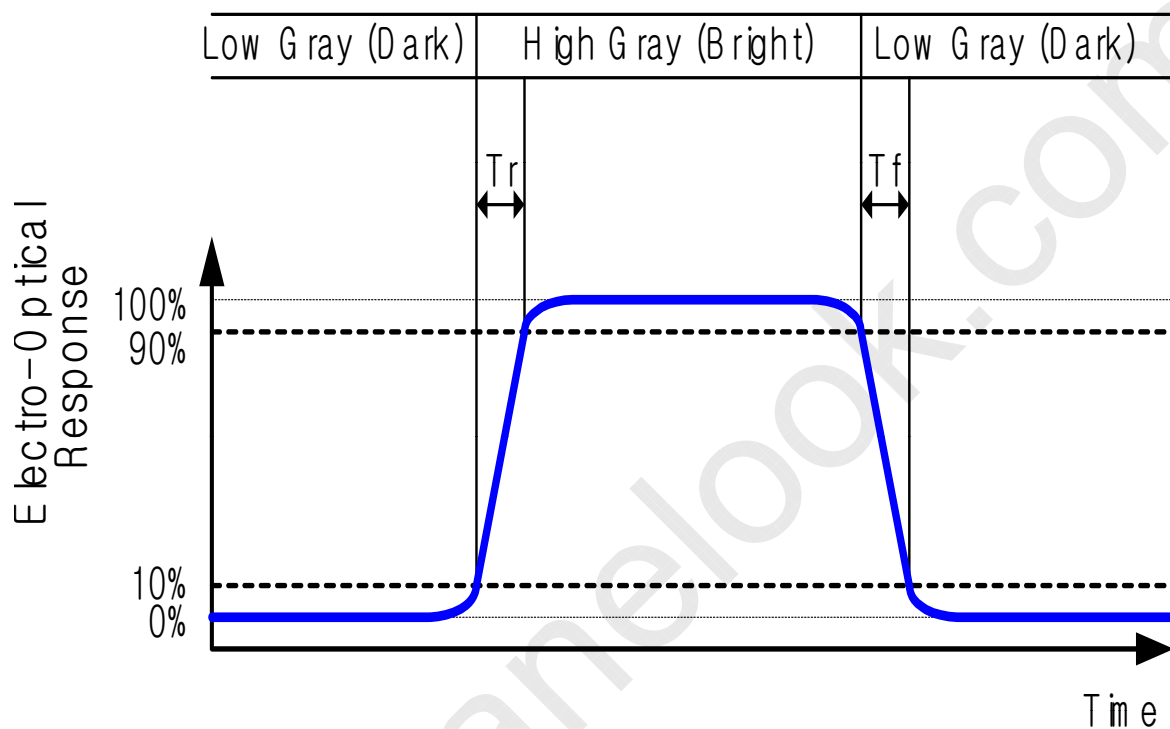

 京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	A	2011.1.20
SPEC. NUMBER S864-6002	SPEC. TITLE HV320WXC-100 Product Specification	PAGE 27 OF 28	

Figure 4. TFT-LCD Module Outline Dimensions (Front view)

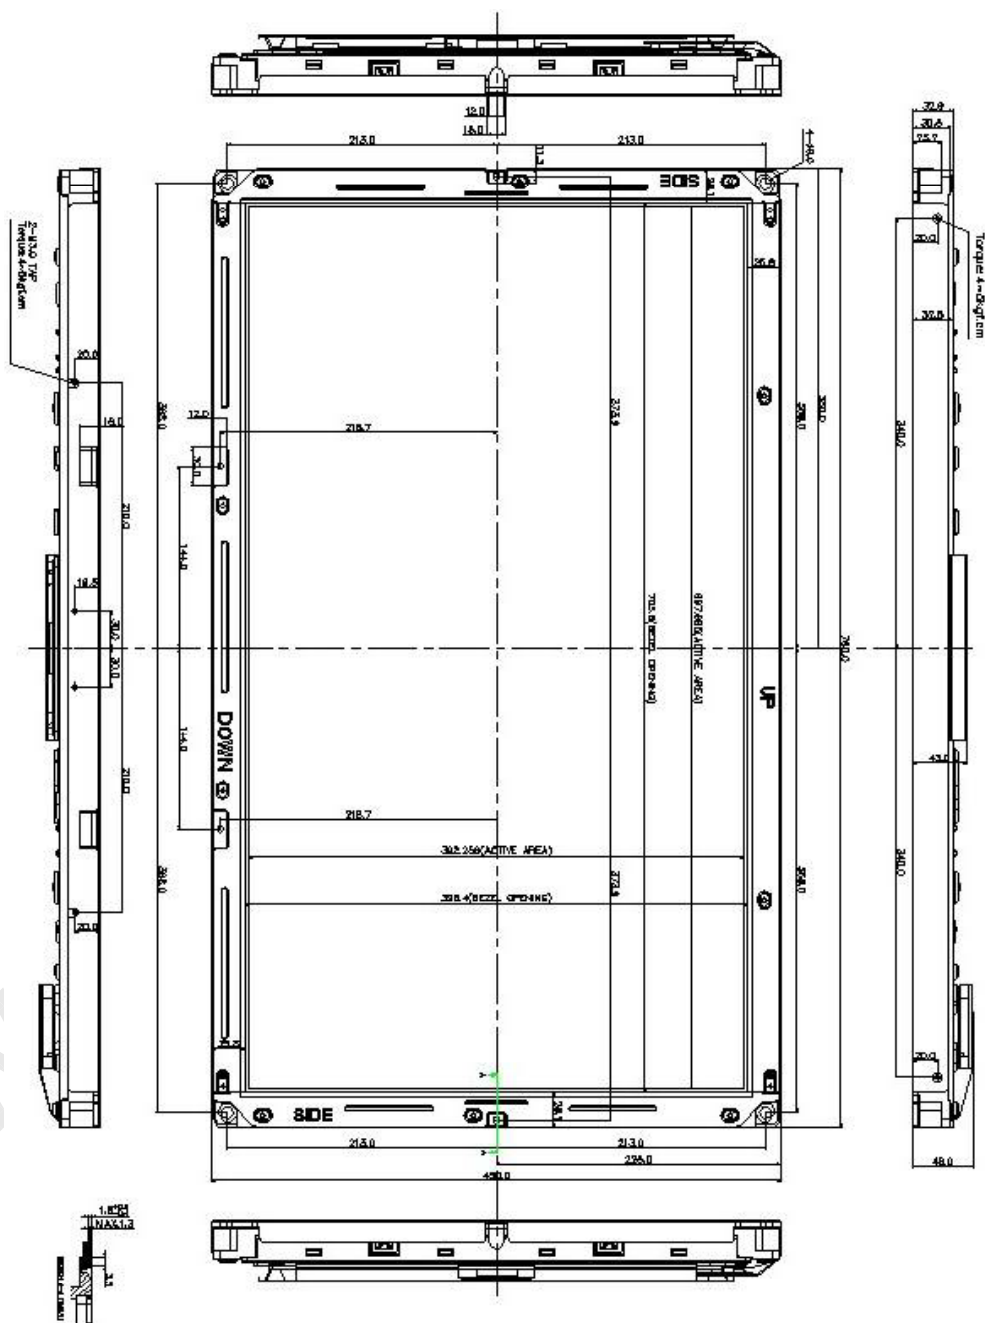

NOTE

1. Unspecified tolerances are to be $\pm 1.0\text{mm}$.
2. I/F CONNECTOR SPECIFICATION
IS100-L30B-C23 or equivalent
3. INVERTER CONNECTOR SPECIFICATION
Cvlux C1014M1HRL-LF or equivalent
4. USER MOUNTING TORQUE SPEC: 4~5kgf.cm

Figure 5. TFT-LCD Module Outline Dimensions (Rear view)

A4(210 X 297)