


Features

- Low Insertion Loss: 0.6 dB @ 2.5 GHz
- High Isolation: 28 dB @ 5.8 GHz
- Low control voltage: 1.3 to 3.3 V
- No external DC blocking capacitors required
- Small XQFN12L (2x2x0.55mm) package

Description

The HWS546 is a GaAs SPDT switch operating at 0.5-6.0 GHz in a XQFN12L (2x2x0.55mm) package. The HWS546 features low insertion loss with very low DC power consumption. This switch can be used in WLAN systems for transmit/receive or antenna diversity functions.

Top View

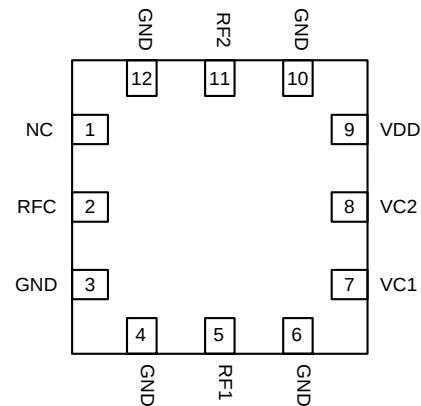


Electrical Specifications at 25°C with 0, +2.8V Control Voltages


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
RF Specification						
Insertion Loss	IL	2.4-2.5 GHz 4.9-6.0 GHz		0.6 0.8	0.8 1.0	dB
Isolation	ISO	2.4-2.5 GHz 4.9-6.0 GHz	22 24	25 28		dB dB
Return Loss	RL	2.4-2.5 GHz 4.9-6.0 GHz		18 13		dB dB
Input Power for 0.1dB Compression	P0.1dB	2.5 GHz		39		dBm
2 nd and 3 rd Harmonics		Pin=+20dBm		-70		dBc
DC Specification						
Supply Voltage	V _{DD}		1.8	2.8	3.3	V
Supply Current	I _{DD}	V _{DD} =2.8V		90		uA
Shutdown Mode Supply Current	I _{OFF}	V _{DD} =2.8V VC1=VC2=0V		5		uA
Control Voltage High Low	V _c		1.3 0		V _{DD} 0.3	V
Control Current	I _c			0.5	2	uA
Switching Specification						
Switching Time		50% V _c to 90/10% RF 10% RF to 90% RF		1500 250		ns
Startup Time		Shutdown to RF State			50	us

Note: All measurements made in a 50 ohm system with 0/+2.8V control voltages, unless otherwise specified.


Return Loss vs. Frequency

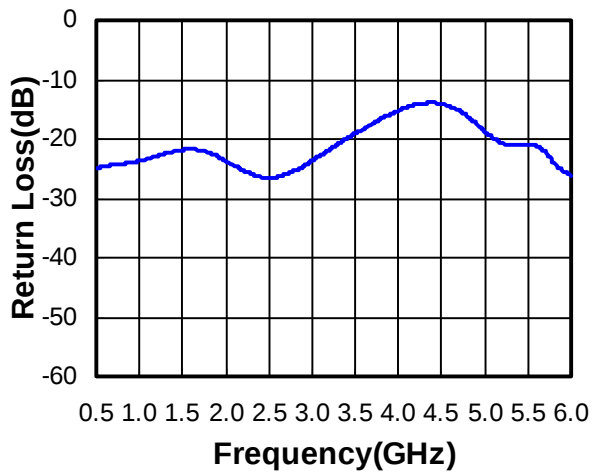

Isolation vs. Frequency

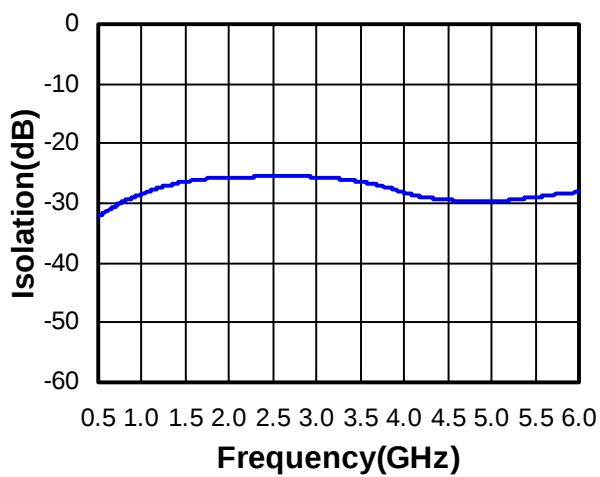

Insertion Loss vs. Frequency

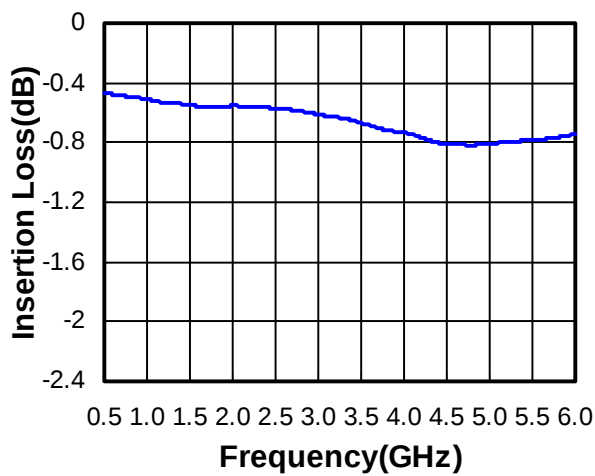

Logic Table for Switch On-Path

VC1	VC2	RFC-RF1	RFC-RF2
1	0	off	on
0	1	on	off
0	0	Shutdown	

'1' = +1.3V to V_{DD}

'0' = 0V to +0.3V

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power 0.5-6.0 GHz	+39 dBm
Supply Voltage	+4.8V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

Chip Outline

Unit: mm

