

HYUNDAI

HY5117810 Series

2M x 8-bit CMOS DRAM with WPB

DESCRIPTION

The HY5117810 is the new generation and fast dynamic RAM organized 2,097,152 x 8-bit. The HY5117810 utilizes Hyundai's CMOS silicon gate process technology as well as advanced circuit techniques to provide wide operating margins to the users. Multiplexed address inputs permit the HY5117810 to be packaged in standard 28/28 pin plastic SOJ, TSOP-II and Reverse TSOP-II.

The package size provides high system bit densities and is compatible with widely available automated testing and insertion equipments. System oriented feature includes single power supply of $5V \pm 10\%$ tolerance and direct interfacing capability with high performance logic families such as Schottky TTL.

FEATURES

- Low power dissipation
Max. battery back-up 3.3mW (SL-part)
Max. CMOS standby 2.2mW (SL-part)
5.5mW
Max. TTL standby 11.0mW
Max. operating

Speed	Power
70	715mW
80	660mW
100	605mW

- Single power supply of $5V \pm 10\%$
- TTL compatible inputs and outputs
- Fast access Time



Speed	t _{RAC}	t _{CAC}	t _{PC}
70	70ns	20ns	45ns
80	80ns	20ns	50ns
100	100ns	25ns	60ns

- Fast page mode operation
- Write-Per-Bit
- Read-Modify-Write capability
- CAS-before-RAS, RAS-only, Hidden refresh and Self Refresh
- 2048 refresh cycles / 256ms (SL-part)
2048 refresh cycles / 32ms


PIN DESCRIPTION

RAS	Row Address Strobe
CAS	Column Address Strobe
WB/WE	Write-Per-Bit/Write Enable
OE	Output Enable
A0-A10	Address Input
W/DQ0-DQ7	Write Mask/Data I/O
VCC	Power (+5V)
VSS	Ground

PIN CONNECTION

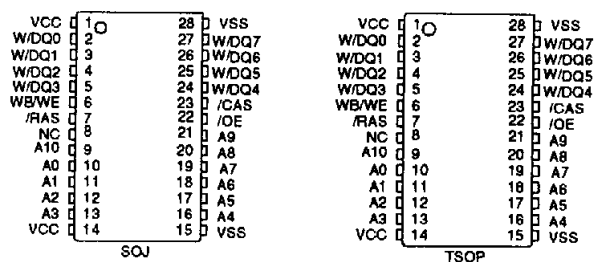

BLOCK DIAGRAM

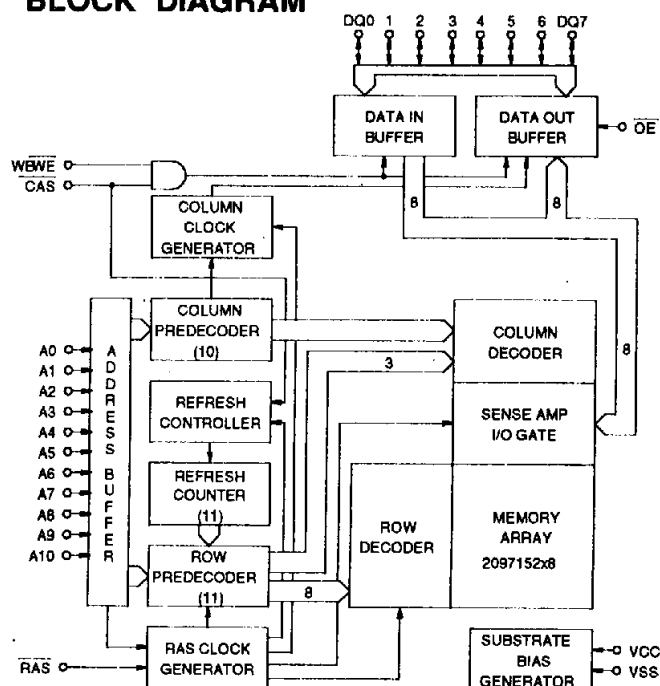

This document is a general product description and is subject to change without notice. Hyundai electronics does not assume any responsibility for use of circuits described. No patent licences are implied.

1AD10-10-MAY94

www.DataSheet4U.com

921

ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	RATING	UNIT
TA	Ambient Temperature	0 to 70	°C
TSTG	Storage Temperature	-55 to 150	°C
VIN, VOUT	Voltage on Any Pin Relative to Vss	-1.0 to 7.0	V
VCC	Voltage on Vcc Relative to Vss	-1.0 to 7.0	V
Ios	Short Circuit Output Current	50	mA
PD	Power Dissipation	1.0	W
TSOLDER	Soldering Temperature•Time	260•10	°C•sec

NOTE : Operation at or above Absolute Maximum Ratings can adversely affect device reliability.

RECOMMENDED DC OPERATING CONDITIONS

(TA=0°C to 70°C)

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNIT
VCC	Power Supply Voltage	4.5	5.0	5.5	V
VIH	Input High Voltage	2.4	-	VCC+1.0	V
VIL	Input Low Voltage	-1.0	-	0.8	V

NOTE : All voltages are referenced to Vss.

DC CHARACTERISTICS

(TA=0°C to 70°C, VCC=5V±10%, VSS=0V, unless otherwise noted.)

SYMBOL	PARAMETER	TEST CONDITIONS	SPEED/ POWER	MIN.	MAX.	UNIT	NOTE
ILI	Input Leakage Current (Any Input Pins)	$V_{SS} \leq V_{IN} \leq V_{CC}+1.0$ All other pins not under test= V_{SS}		-10	10	μA	
ILO	Output Leakage Current (High Impedance State)	$V_{SS} \leq V_{OUT} \leq V_{CC}$, RAS & CAS at V_{IH}		-10	10	μA	
ICC1	Vcc Supply Current, Operating	tRC=tRC (min.)	70 80 100	-	130 120 110	mA	1,2,3
ICC2	Vcc Supply Current, TTL Standby	RAS & CAS at V_{IH} , other inputs $\geq V_{SS}$		-	2	mA	
ICC3	Vcc Supply Current, RAS-only refresh	tRC=tRC (min.)	70 80 100	-	130 120 110	mA	1,3
ICC4	Vcc Supply Current, Fast Page mode	tPC=tPC (min.)	70 80 100	-	130 120 110	mA	1,2,3
ICC5	Vcc Supply Current, CMOS Standby	RAS & CAS $\geq V_{CC} - 0.2V$	SL-part	-	1 0.4	mA	5
ICC6	Vcc Supply Current, CAS-before-RAS refresh	tRC=tRC (min.)	70 80 100	-	130 120 110	mA	1,3
ICC7	Vcc Supply Current, Battery Back Up (SL-Part only)	tRC=125 μs , CAS=CBR cycling or 0.2V, WE= $V_{CC} - 0.2V$, A0-A11= $V_{CC} - 0.2V$ or 0.2V, D= $V_{CC} - 0.2V$, 0.2V or open, Q=open	tRAS \leq 300ns tRAS \leq 1 μs	-	450 600	μA	1,4,5
ICC8	Vcc Supply Current, Self Refresh (SL-Part only)	RAS & CAS $\leq 0.2V$ other pins same as ICC7			500	μA	5
VOL	Output Low Voltage	IOL=4.2mA		-	0.4	V	
VOH	Output High Voltage	IOH=-5mA		2.4	-	V	

NOTE :

- ICC1, ICC3, ICC4, ICC6 and ICC7 depend on cycle rate.
- ICC1 and ICC4 depend on output loading. Specified values are obtained with the output open.
- ICC is specified as an average current. In ICC1 and ICC3, Address can be changed maximum two times while RAS= V_{IL} . In ICC4, Address can be changed maximum once while CAS= V_{IH} .
- tRAS(max.)=1 μs is only applied to refresh of battery backup but tRAS(max.)=10 μs is applied to normal functional operating.
- ICC5(max.)=0.4mA and ICC7 and ICC8 are applied to SL-part only (HY5117810SLJC, HY5117810SLTC and HY5117810SLRC).

AC CHARACTERISTICS

(TA=0°C to 70°C, VCC=5V±10%, VSS = 0V, unless otherwise noted.) NOTE : 1, 2, 3

#	SYMBOL	PARAMETER	HY5117810JC/TC/RC/SLJC/SLTC/SLRC						UNIT	NOTE
			-70		-80		-100			
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
1	tRC	Random Read or Write Cycle Time	130	-	150	-	180	-	ns	
2	tRWC	Read-Modify-Write Cycle Time	185	-	205	-	245	-	ns	
3	tPC	Fast Page Mode Cycle Time	45	-	50	-	60	-	ns	
4	tPRWC	Fast Page Mode Read-Modify-Write Cycle Time	100	-	105	-	125	-	ns	
5	tRAC	Access Time from RAS	-	70	-	80	-	100	ns	4,9,10
6	tCAC	Access Time from CAS	-	20	-	20	-	25	ns	4,9
7	tAA	Access Time from Column Address	-	35	-	40	-	50	ns	4,10
8	tCPA	Access Time from CAS Precharge	-	40	-	45	-	50	ns	4
9	tCLZ	CAS to Output Low Impedance	0	-	0	-	0	-	ns	4
10	tOFF	Output Buffer Turn-off Delay	0	15	0	15	0	15	ns	5
11	tT	Transition Time (Rise and Fall)	3	50	3	50	3	50	ns	3
12	tRP	RAS Precharge Time	50	-	60	-	70	-	ns	
13	tRAS	RAS Pulse Width	70	10K	80	10K	100	10K	ns	
14	tRASP	RAS Pulse Width (Fast Page Mode)	70	100K	80	100K	100	100K	ns	
15	tRSH	RAS Hold Time	20	-	20	-	25	-	ns	
16	tCSH	CAS Hold Time	70	-	80	-	100	-	ns	
17	tCAS	CAS Pulse Width	20	10K	20	10K	25	10K	ns	
18	tRCD	RAS to CAS Delay	20	50	20	60	25	75	ns	9
19	tRAD	RAS to Column Address Delay Time	15	35	15	40	20	50	ns	10
20	tCRP	CAS to RAS Precharge Time	5	-	5	-	10	-	ns	
21	tCP	CAS Precharge Time	10	-	10	-	10	-	ns	
22	tASR	Row Address Set-up Time	0	-	0	-	0	-	ns	
23	tRAH	Row Address Hold Time	10	-	10	-	15	-	ns	
24	tASC	Column Address Set-up Time	0	-	0	-	0	-	ns	
25	tCAH	Column Address Hold Time	15	-	15	-	20	-	ns	
26	tAR	Column Address Hold Time from RAS	55	-	60	-	75	-	ns	
27	tRAL	Column Address to RAS Lead Time	35	-	40	-	50	-	ns	
28	tRCS	Read Command Set-up Time	0	-	0	-	0	-	ns	
29	tRCH	Read Command Hold Time Referenced to CAS	0	-	0	-	0	-	ns	6
30	tRRH	Read Command Hold Time Referenced to RAS	0	-	0	-	0	-	ns	6
31	tWCH	Write Command Hold Time	15	-	15	-	20	-	ns	
32	tWCR	Write Command Hold Time from RAS	55	-	60	-	75	-	ns	
33	tWP	Write Command Pulse Width	15	-	15	-	20	-	ns	
34	tRWL	Write Command to RAS Lead Time	20	-	20	-	25	-	ns	
35	tCWL	Write Command to CAS Lead Time	20	-	20	-	25	-	ns	
36	tDS	Data-In Set-up Time	0	-	0	-	0	-	ns	7
37	tDH	Data-In Hold Time	15	-	15	-	20	-	ns	7
38	tDHR	Data-In Hold Time Referenced to RAS	55	-	60	-	75	-	ns	
39	tREF	Refresh Period (2048 cycles)	-	32	-	32	-	32	ms	12
		SL-part	-	256	-	256	-	256	ms	11
40	tWCS	Write Command Set-up Time	0	-	0	-	0	-	ns	8

AC CHARACTERISTICS

(continued)

#	SYMBOL	PARAMETER	HY5116810JC/TC/RC/SLJC/SLTC/SLRC						UNIT	NOTE
			-70		-80		-100			
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
41	tCWD	CAS to WE Delay Time	50	-	50	-	60	-	ns	8
42	tRWD	RAS to WE Delay Time	100	-	110	-	135	-	ns	8
43	tAWD	Column Address to WE Delay Time	65	-	70	-	85	-	ns	8
44	tCSR	CAS Set-up Time (CBR Cycle)	10	-	10	-	10	-	ns	
45	tCHR	CAS Hold Time (CBR Cycle)	15	-	15	-	20	-	ns	
46	tRPC	RAS to CAS Precharge Time	10	-	10	-	10	-	ns	
47	tCPT	CAS Precharge Time (CBR Counter Test)	40	-	40	-	50	-	ns	
48	tROH	RAS Hold Time Reference to OE	20	-	20	-	20	-	ns	
49	tOEA	OE Access Time	-	20	-	20	-	25	ns	
50	tOED	OE to Data Delay	20	-	20	-	25	-	ns	
51	tOEZ	Output Buffer Turn Off Delay Time	0	15	0	15	0	15	ns	5
52	tOEH	OE Command Hold Time	20	-	20	-	25	-	ns	
53	tCPWD	WE Delay Time from CAS Precharge	70	-	75	-	90	-	ns	8
54	tRHCP	RAS Hold Time from CAS Precharge	45	-	45	-	55	-	ns	
55	tRASS	RAS Pulse Width (Self Refresh Cycle)	100	-	100	-	100	-	µs	
56	tRPS	RAS Precharge Time (Self Refresh Cycle)	130	-	150	-	180	-	ns	
57	tCHS	CAS Hold Time (Self Refresh Cycle)	-50	-	-50	-	-50	-	ns	
58	tWBS	Write-Per-Bit Set-up Time	0	-	0	-	0	-	ns	
59	tWBH	Write-Per-Bit Hold Time	10	-	10	-	15	-	ns	
60	tWDS	Write-Per-Bit Selection Set-up Time	0	-	0	-	0	-	ns	
61	tWDH	Write-Per-Bit Selection Hold Time	10	-	10	-	15	-	ns	

et4U.com

DataShee

NOTE :

1. An initial pause of 200 μ s is required after power-up followed by any 8 $\overline{\text{RAS}}$ only or $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycles before proper device operation is achieved. In case of using internal refresh counter, a minimum of 8 $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ initialization cycles instead of 8 $\overline{\text{RAS}}$ -only refresh cycles are required.
2. If $\overline{\text{RAS}} = \text{Vss}$ during power-up, the HY5117810 could begin an active cycle. This condition results in higher current than necessary current which is demanded from the power supply during power-up. It is recommended that $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ track with Vcc during power-up or be held at valid VIH in order to minimize the power-up current.
3. $\text{VIH}(\text{min.})$ and $\text{VIL}(\text{max.})$ are reference levels for measuring timing of input signals. Transition times are measured between $\text{VIH}(\text{min.})$ and $\text{VIL}(\text{max.})$, and are assumed to be 5ns for all inputs
4. Measured at $\text{VOH}=2.4\text{V}$ and $\text{VOL}=0.4\text{V}$ with a load equivalent to 2 TTL loads and 100pF.
5. $\text{tOFF}(\text{max.})$ and tOEZ define the time at which the output achieves the open circuit condition and is not referenced to output voltage levels.
6. Either tRCH or tRRH must be satisfied for a read cycle.
7. These parameters are referenced to $\overline{\text{CAS}}$ leading edge in early write cycles and to $\overline{\text{WB}}/\overline{\text{WE}}$ leading edge in Read-Modify-Write cycles.
8. twCS , tRWD , tCWD , tAWD and tCPWD are not restrictive operating parameters. They are included in the data sheet as electrical characteristics only. If $\text{twCS} \geq \text{twCS}(\text{min.})$, the cycle is an early write cycle and data out pin will remain open circuit (high impedance) through the entire cycle. If $\text{tRWD} \geq \text{tRWD}(\text{min.})$, $\text{tCWD} \geq \text{tCWD}(\text{min.})$, $\text{tAWD} \geq \text{tAWD}(\text{min.})$, and $\text{tCPWD} \geq \text{tCPWD}(\text{min.})$, the cycle is a Read-Modify-Write cycle and data out will contain data read from the selected cell. If neither of the above sets of conditions is satisfied, the condition of the data out (at access time) is indetermined.
9. Operation within the $\text{tRCD}(\text{max.})$ limit insures that $\text{tRAC}(\text{max.})$ can be met. $\text{tRCD}(\text{max.})$ is specified as a reference point only. If tRCD is greater than the specified $\text{tRCD}(\text{max.})$ limit, then access time is controlled by tCAC .
10. Operation within the $\text{tRAD}(\text{max.})$ limit insures that $\text{tRAC}(\text{max.})$ can be met. $\text{tRAD}(\text{max.})$ is specified as a reference point only. If tRAD is greater than the specified $\text{tRAD}(\text{max.})$ limit, then access time is controlled by tAA .
11. $\text{tREF}(\text{max.})=256\text{ms}$ is applied to SL-parts only (HY5117810SLJC, HY5117810SLTC and HY5117810SLRC).
12. A burst of 2048 $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycles must be executed within 32ms (256ms for SL-part) after exiting self refresh.


CAPACITANCE

($\text{T}_\text{A}=25^\circ\text{C}$, $\text{V}_{\text{CC}}=5\text{V} \pm 10\%$, $\text{V}_{\text{SS}}=0\text{V}$, $f=1\text{MHz}$, unless otherwise noted.)

SYMBOL	PARAMETER	TYP.	MAX.	UNIT
CIN1	Input Capacitance (A0-A10)	-	5	pF
CIN2	Input Capacitance ($\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WB}}/\overline{\text{WE}}$, $\overline{\text{OE}}$)	-	7	pF
CDQ	Write Mask / Data I/O Capacitance (W/DQ0-W/DQ7)	-	7	pF

TIMING DIAGRAM

READ CYCLE

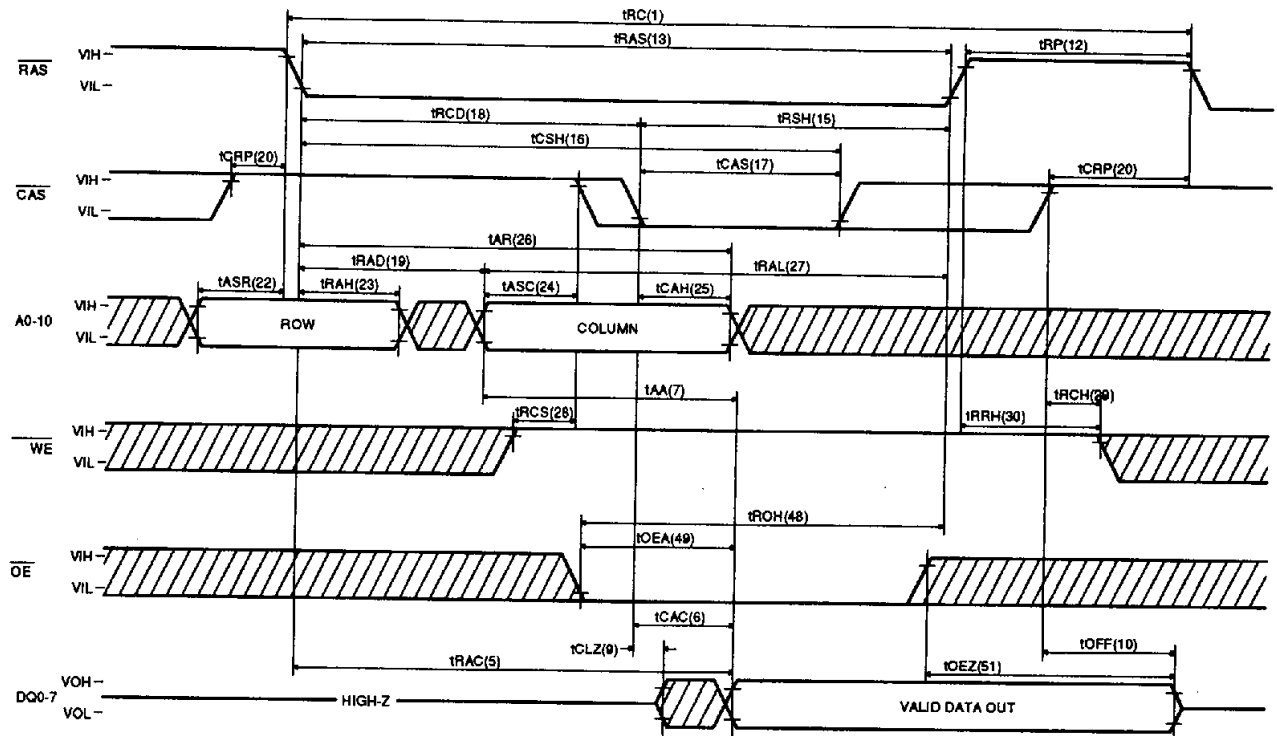


DataSheet4U.com


DataSheet4U.com

DataSheet4U.com

EARLY WRITE CYCLE

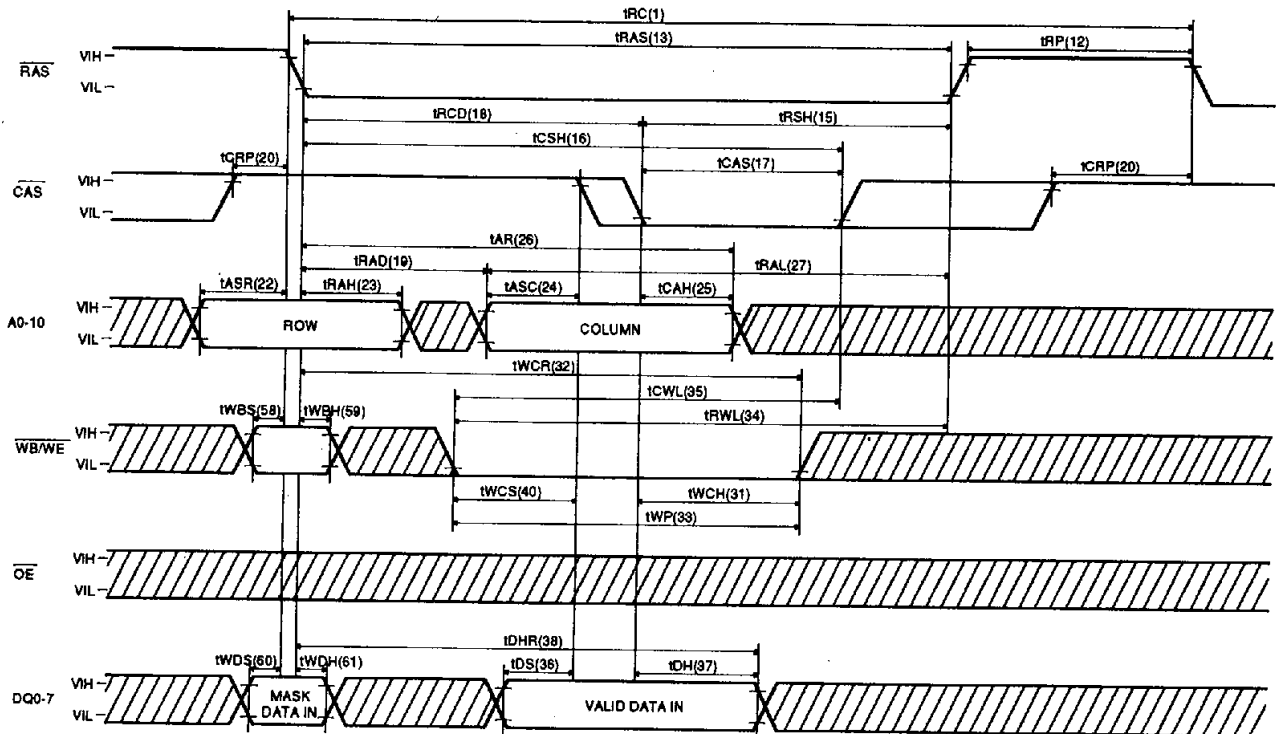


WRITE CYCLE (OE CONTROLLED WRITE)

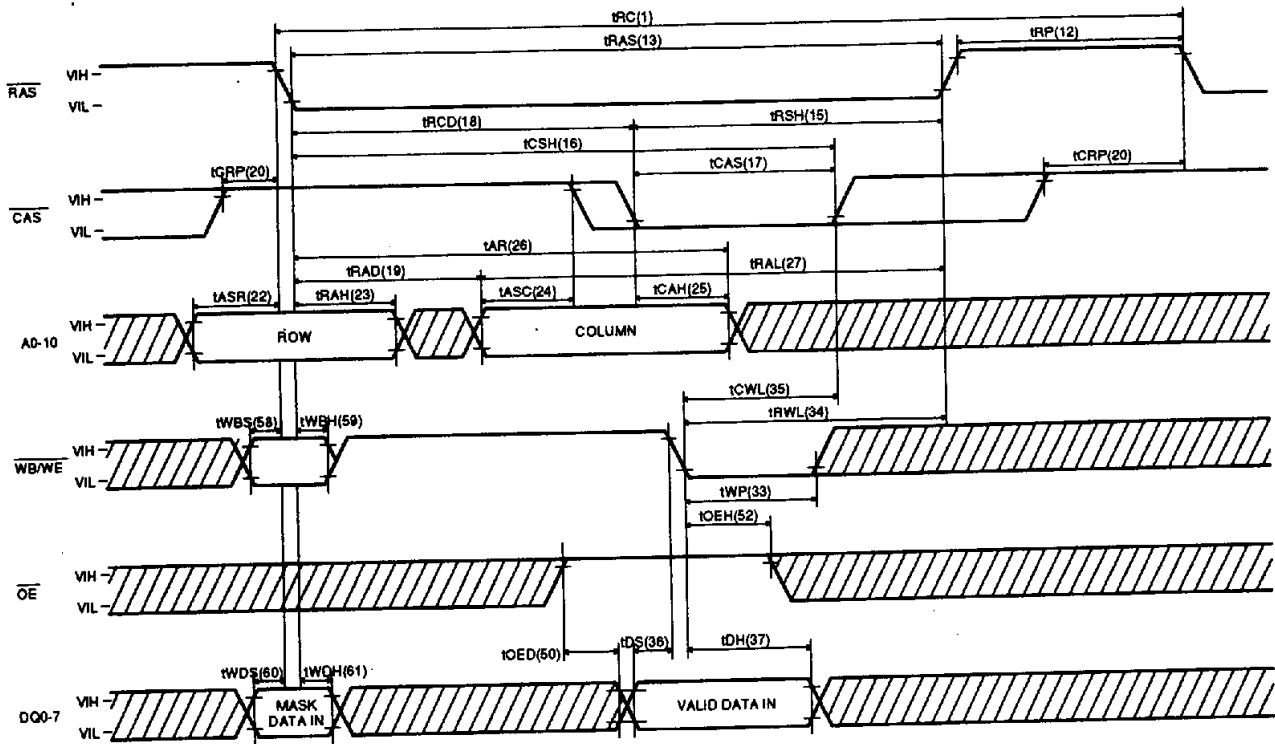


DataSheet4U.com


READ-MODIFY-WRITE CYCLE

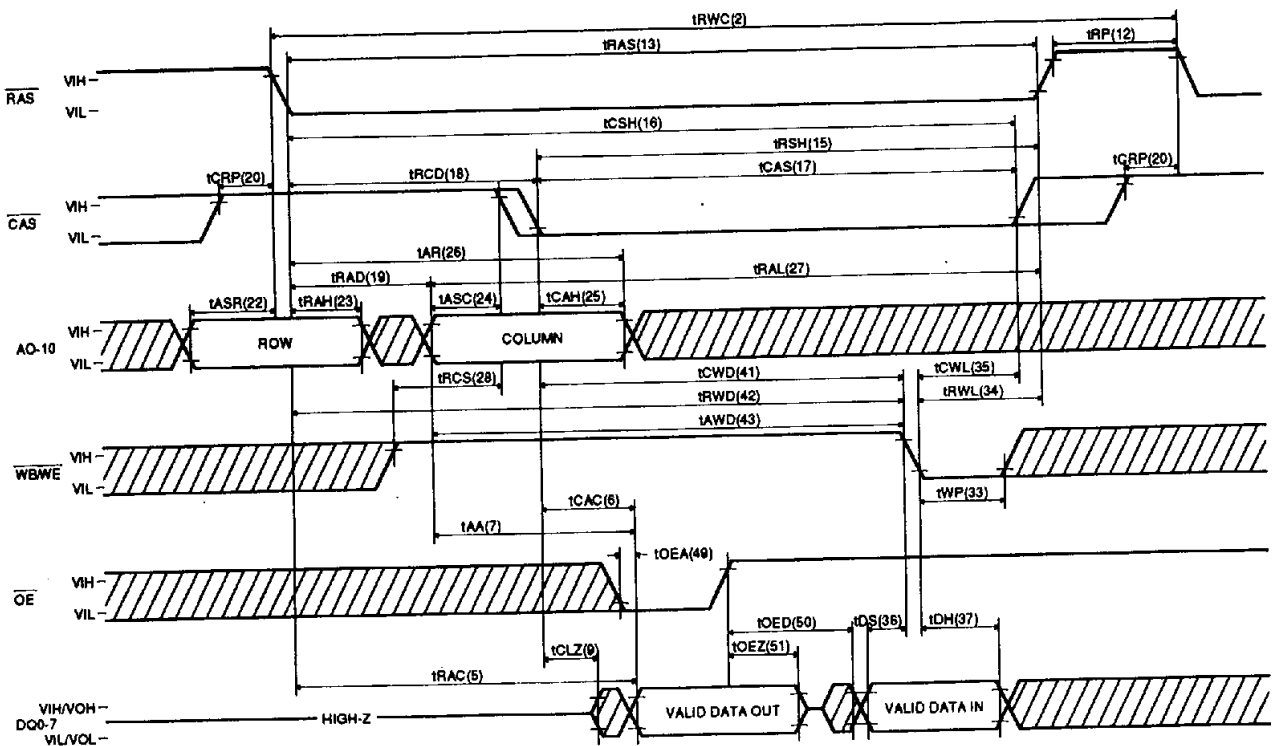


FAST PAGE MODE READ CYCLE

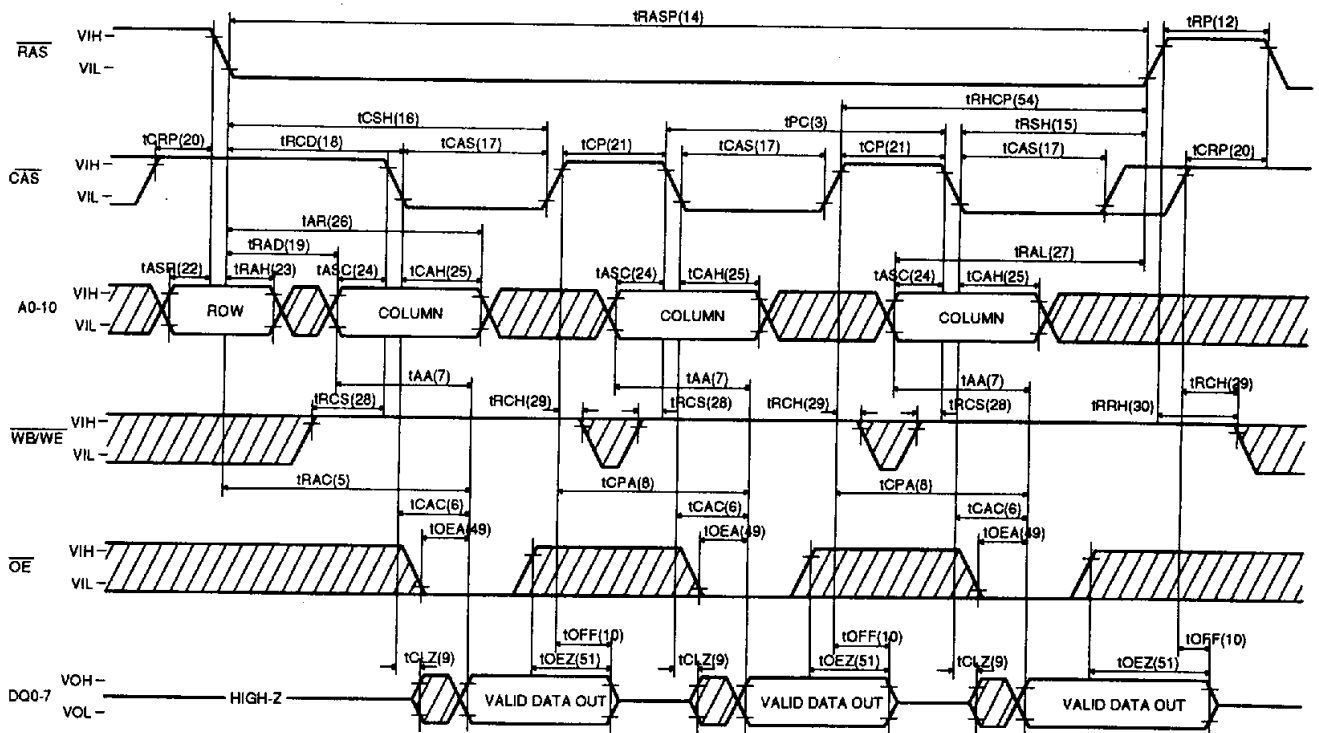

FAST PAGE MODE EARLY WRITE CYCLE

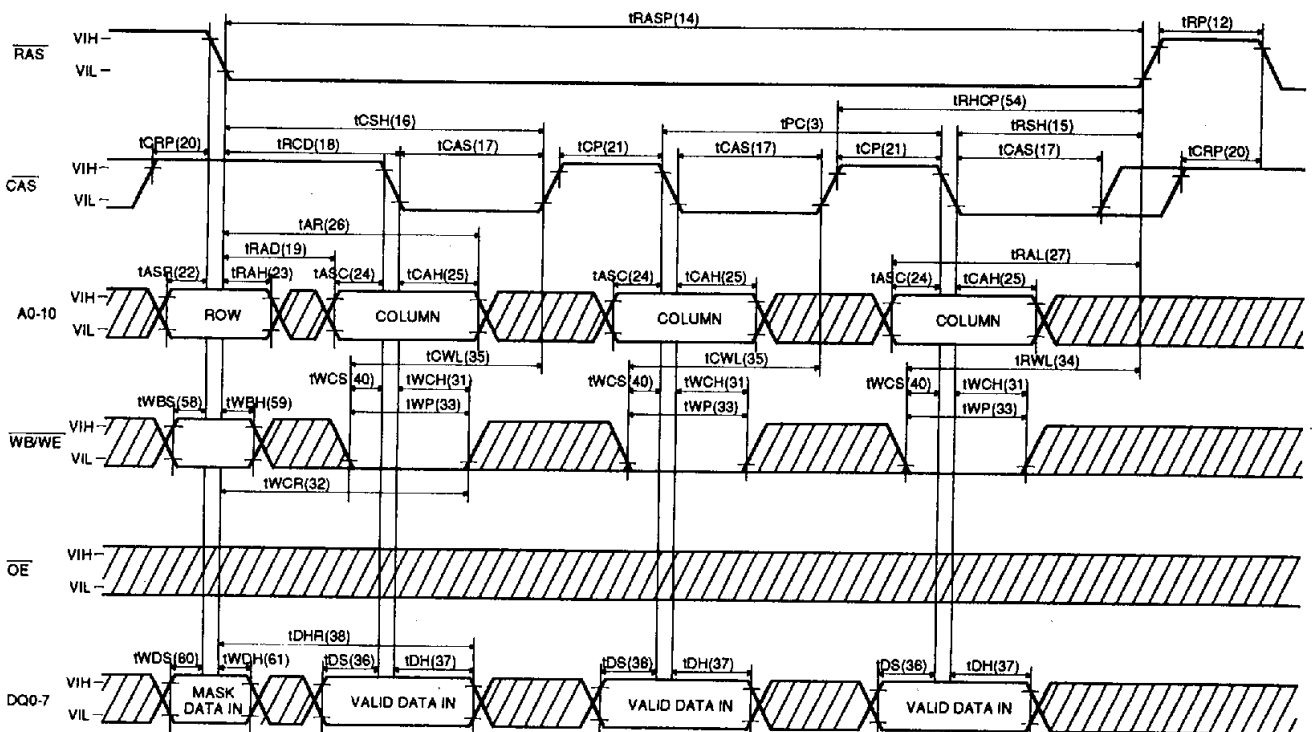

FAST PAGE MODE READ-MODIFY-WRITE CYCLE

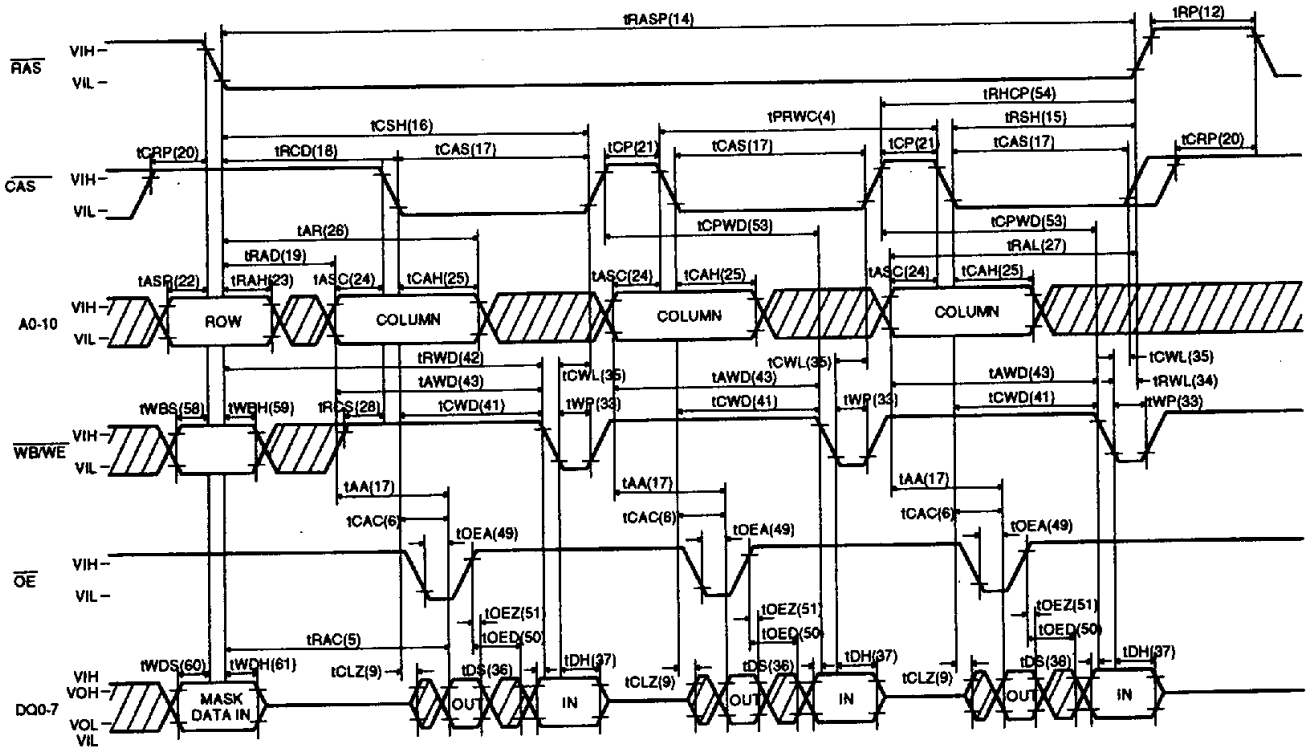


et4U.com


DataSheet4U.com

DataShe


RAS-ONLY REFRESH CYCLE

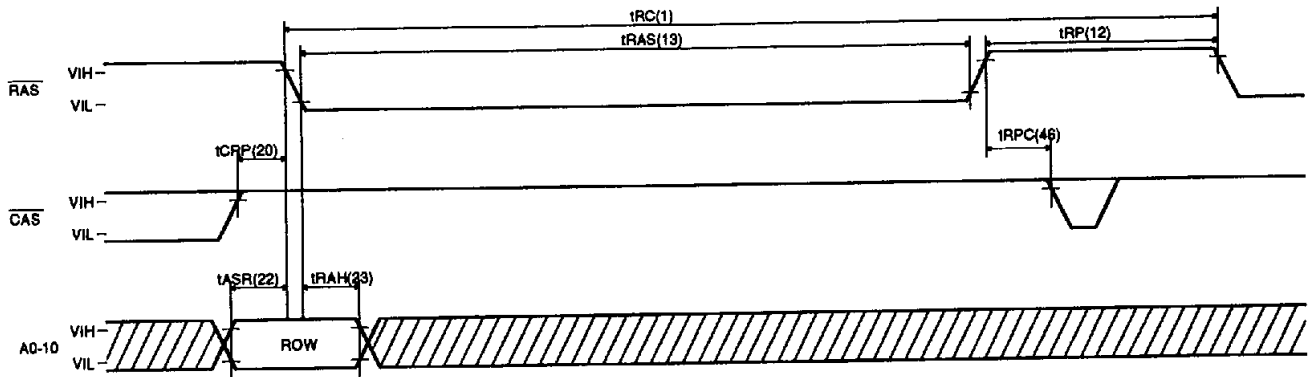


NOTE : OE and WE = "H" or "L"

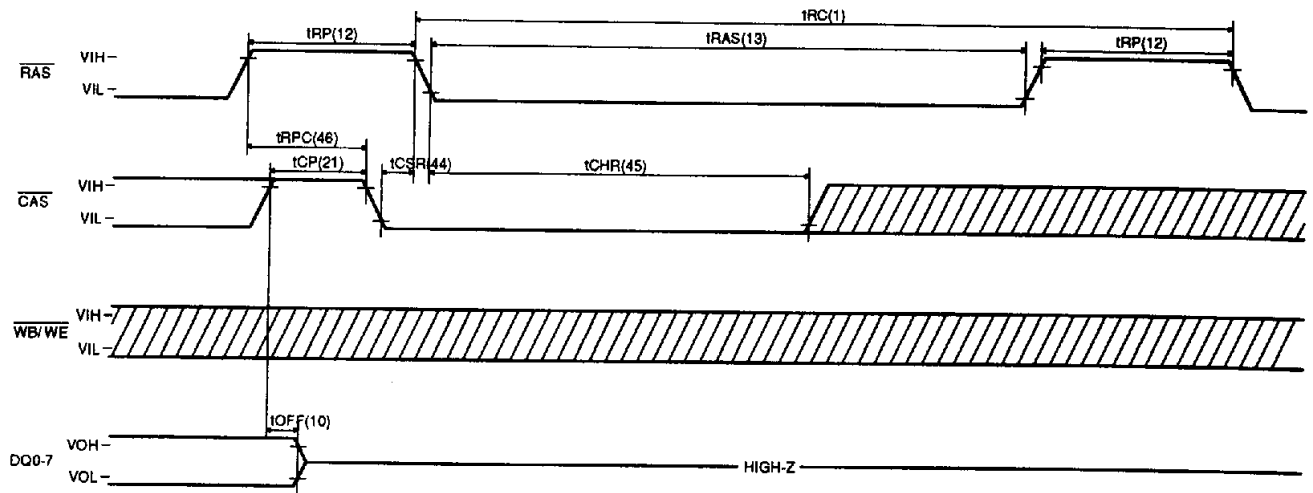CAS-BEFORE-RAS REFRESH CYCLE

NOTE : A0-10 and DE = "H" or "L"

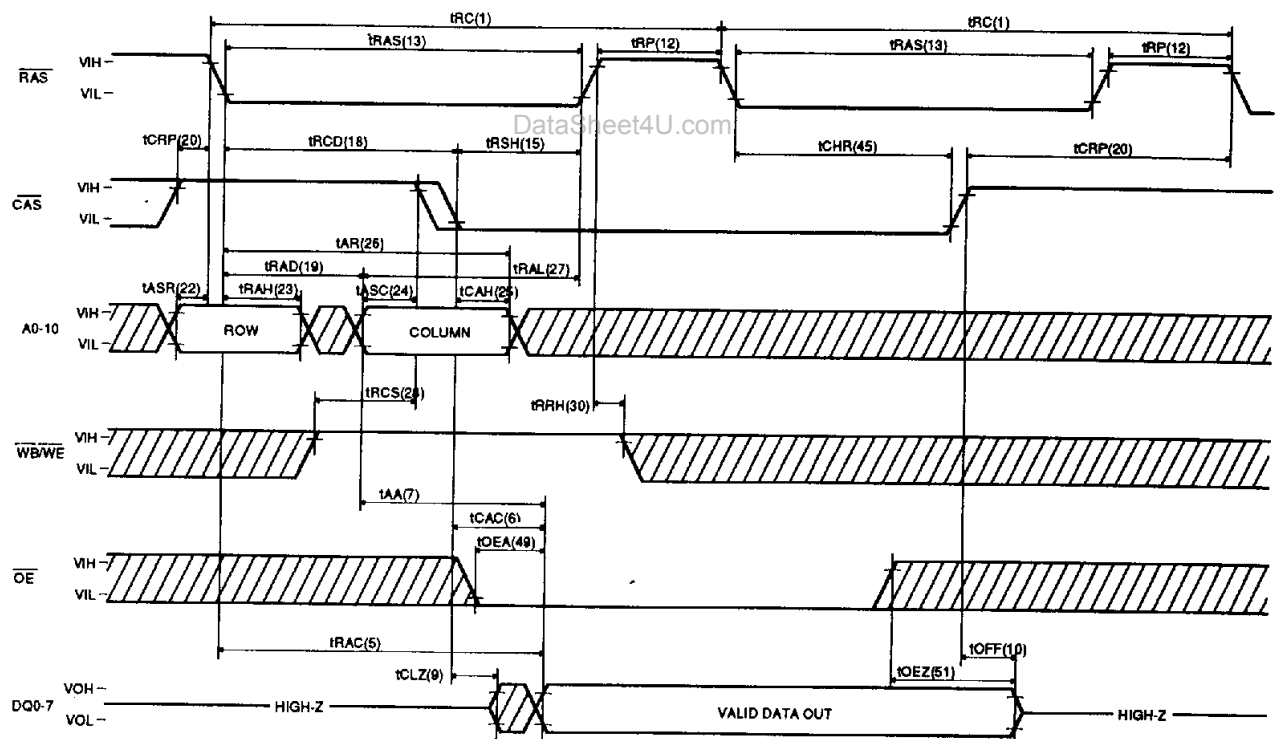HIDDEN REFRESH CYCLE (READ)


HIDDEN REFRESH CYCLE (WRITE)

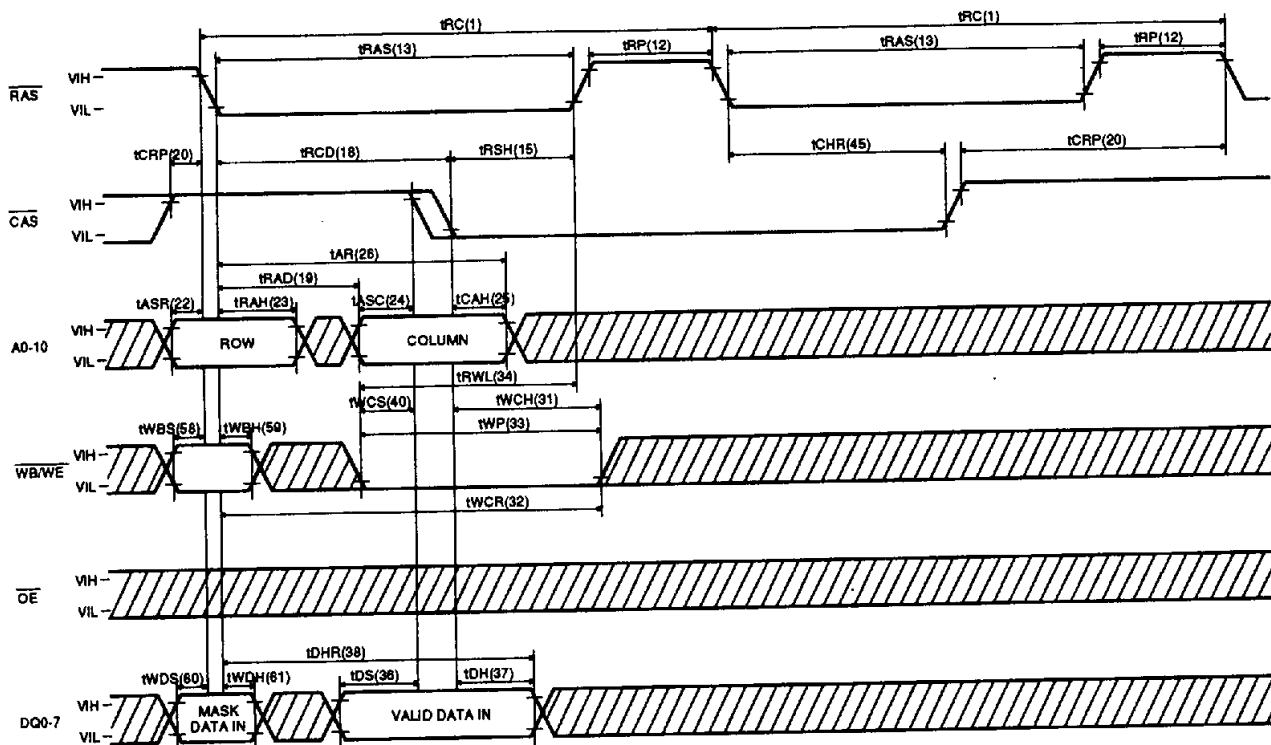

DataSheet4U.com


DataSheet4U.com

CAS-BEFORE-RAS SELF REFRESH CYCLE

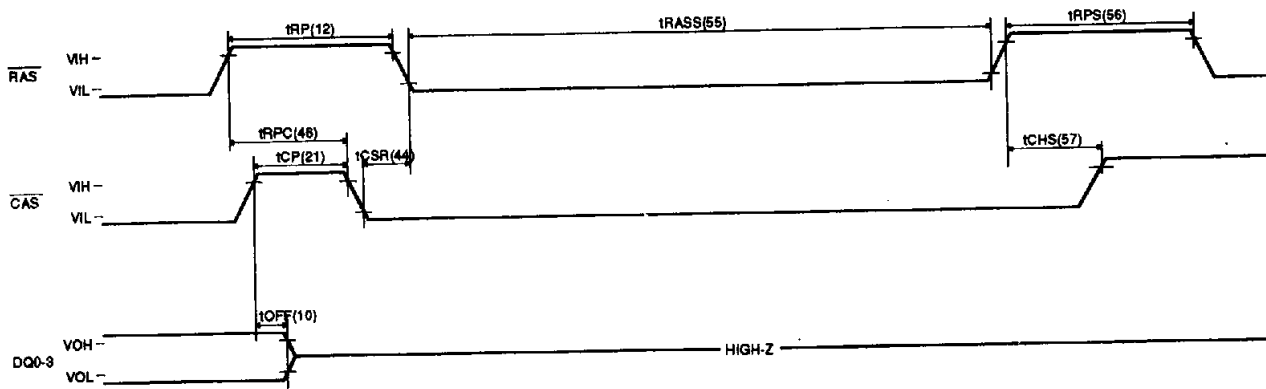


NOTE: A0-10, OE and WE = "H" or "L"

CAS-BEFORE-RAS REFRESH COUNTER TEST CYCLE

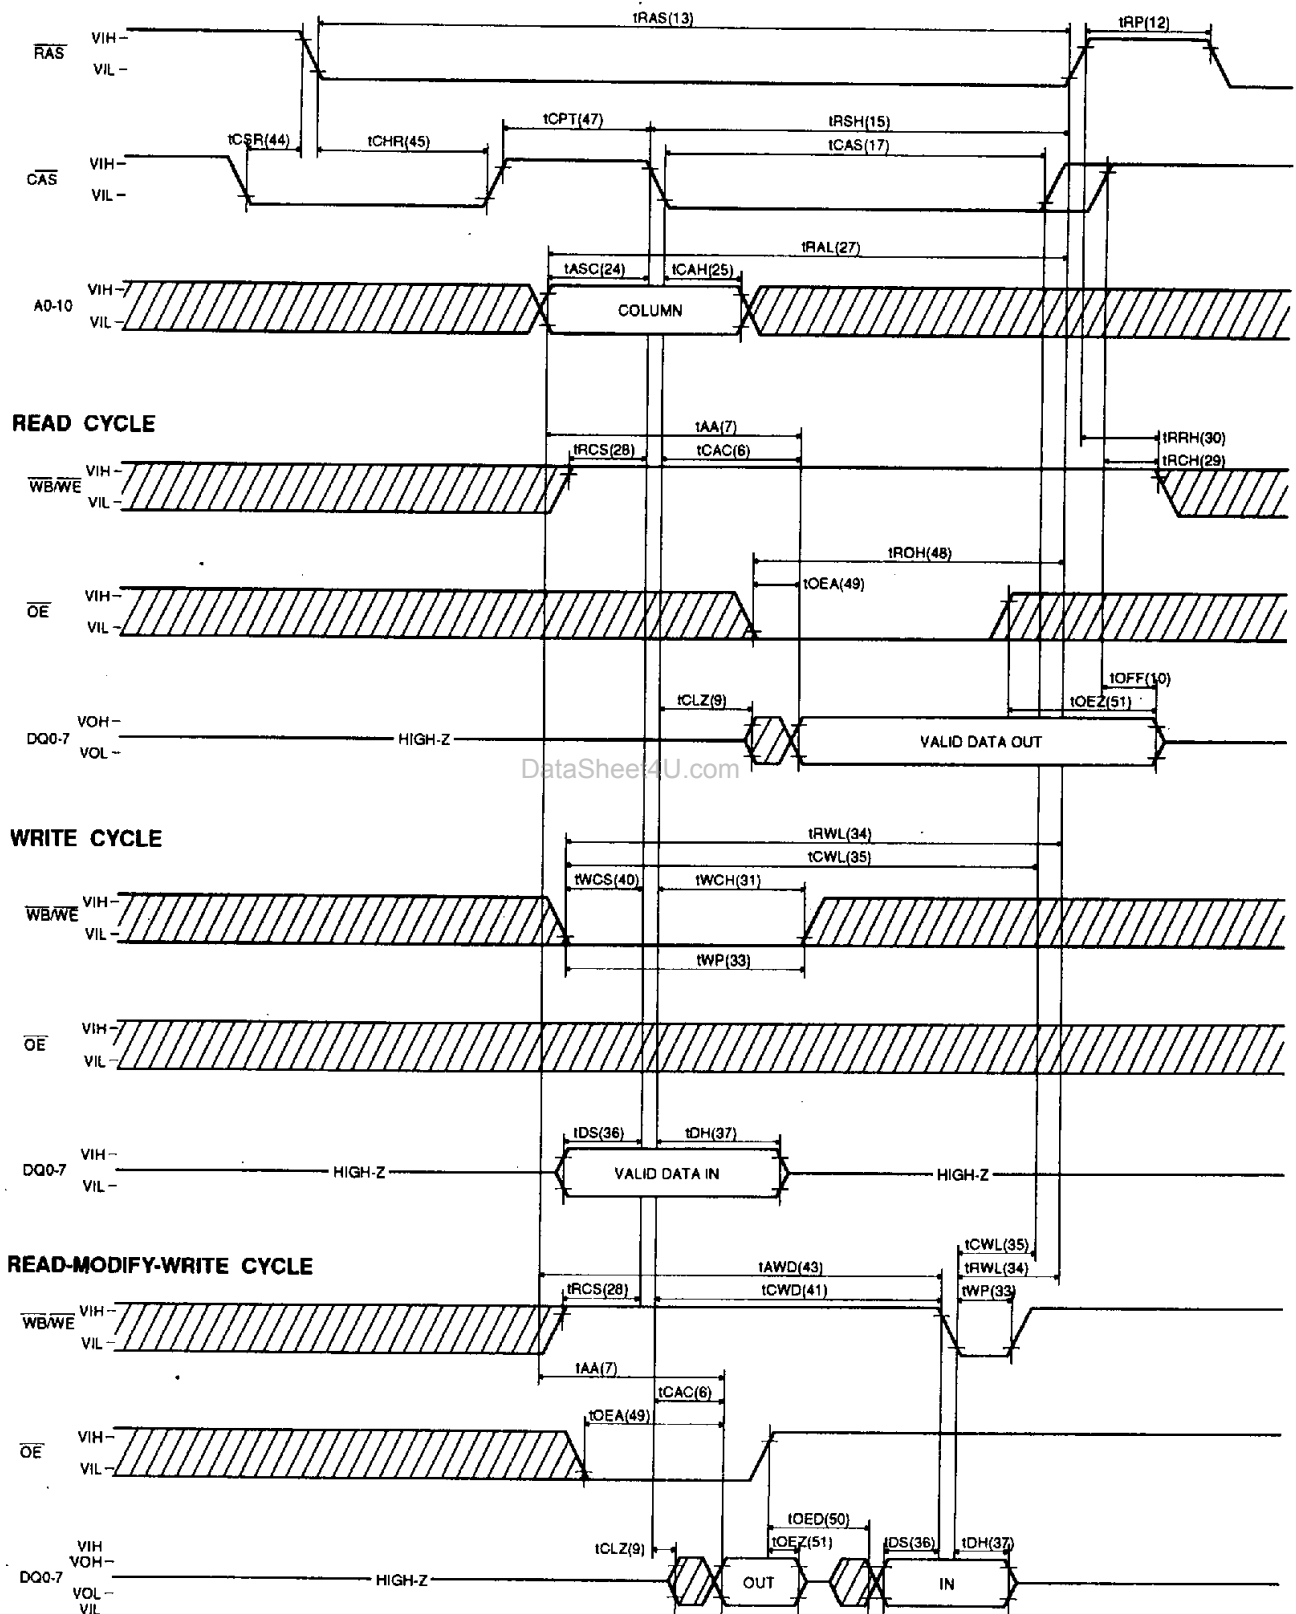


PACKAGE INFORMATION

400 mil 28/28 pin Small Outline J-form Package (JC)

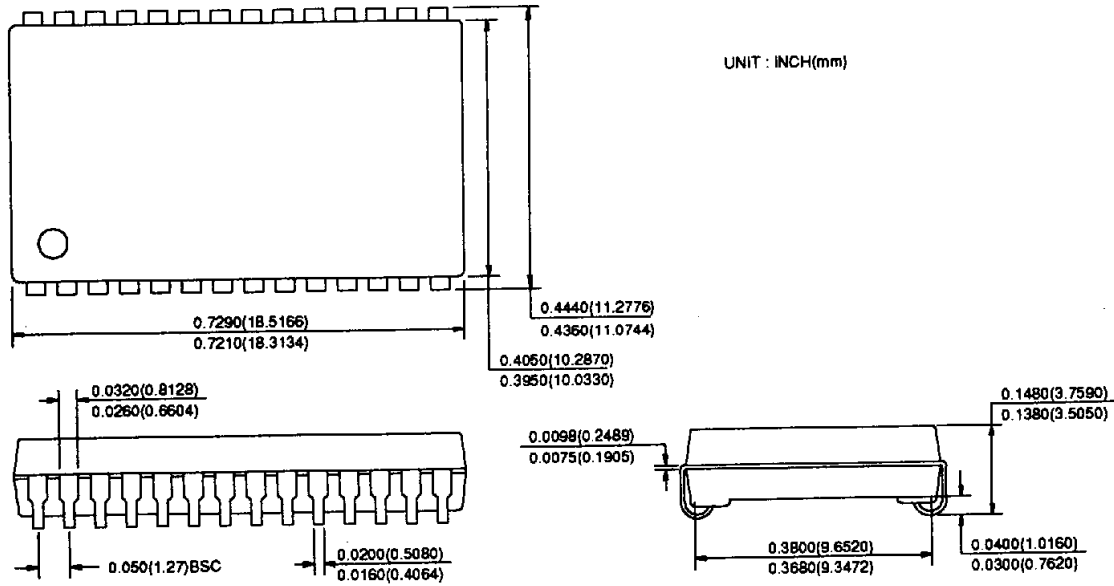

400 mil 28/28 pin Thin Small Outline Package (TC) (RC)

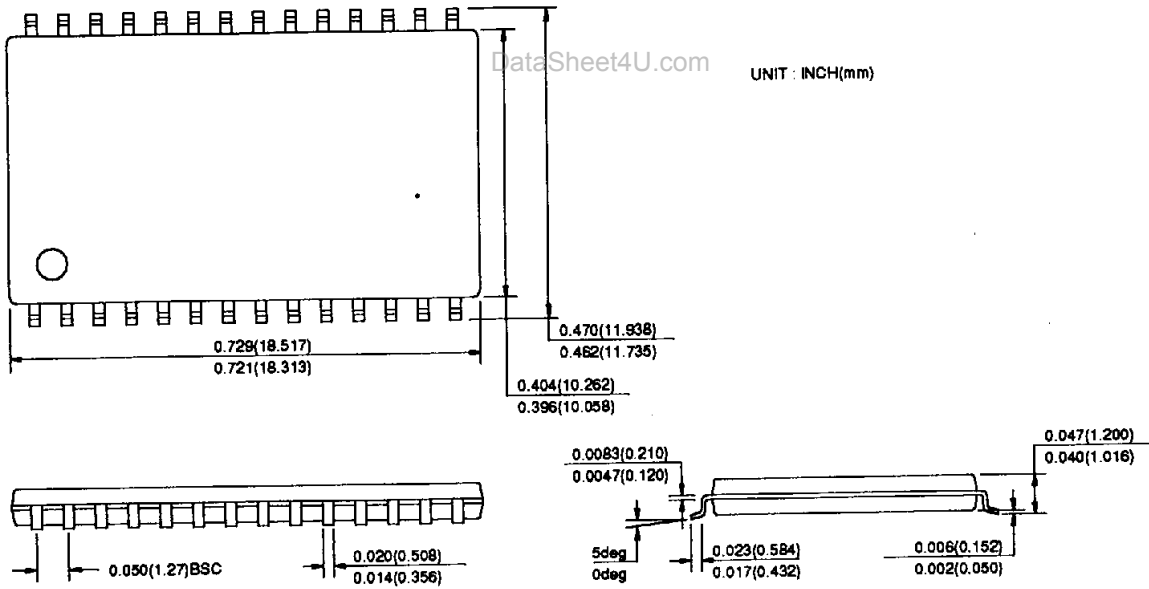

ORDERING INFORMATION

PART NO	SPEED	POWER	PACKAGE
HY5117810JC	70/80/100		SOJ
HY5117810SLJC	70/80/100	SL-part	SOJ
HY5117810TC	70/80/100		TSOP-II
HY5117810SLTC	70/80/100	SL-part	TSOP-II
HY5117810RC	70/80/100		TSOP-II(R)
HY5117810SLRC	70/80/100	SL-part	TSOP-II(R)