

IGD-8-326-E1F12-BH-FA



IGBT Module Stack

Three-phase inverter

SEMIKUBE - Size 3H

IGD-8-326-E1F12-BH-FA

Preliminary Data

Features

- Highly compact
- Integrated current, voltage and temperature sensors
- Easy maintenance
- Easy mounting and dismounting
- Very high Life-Time Expectancy
- Very low inductive DC bus


Typical Applications

- Industrial
- AC motor control
- UPS
- Solar inverter
- Oil and gas pumps

No. 08800930

Footnotes

Electrical parameters to be derated for $T_{amb} > 40^{\circ}\text{C}$

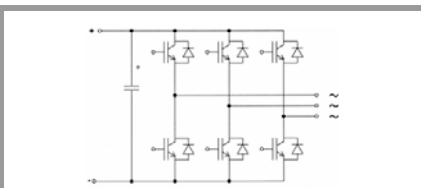


B6CI

| Characteristics | | | | | | |
|----------------------------------|---|-----------------------------------|------------|--------|--------------------|---|
| Symbol | Conditions | min. | typ. | max. | Unit | |
| Electrical Data | | | | | | |
| I_{rms} | $T_{amb}=40^{\circ}\text{C}$, 3kHz, 650V _{dc} , 400V _{ac} , cos=0,85 | no overload | | 1230 | A | |
| | | 110% overload, 60s every 10min | | 1200 | 1320 | A |
| | | 150% overload, 60s every 10min | | 920 | 1390 | A |
| V_{CES} | | | | 1200 | V | |
| f_{sw} | max. switching frequency | | | 20 | kHz | |
| V_{DC} | DC voltage applied to the capacitor bank | | | 750 | V | |
| V_{AC} | network voltage (line side), -20% / +15% | | | 460 | V | |
| V_{isol} | 50Hz / 1min | | | 2500 | V | |
| P_{tot} | $T_{amb}=40^{\circ}\text{C}$ | | 10320 | | W | |
| T_j | T_{vj} for continuous operation | -40 | | 125 | $^{\circ}\text{C}$ | |
| Capacitor Data | | | | | | |
| C_{DC} | value 0...-15% | | 40.18 | | mF | |
| C | | | Electrolyt | | | |
| LTE | expected lifetime calculated, forced air cooling | 60 | | | kHrs | |
| | | 30 | | | kHrs | |
| Controller Interface Data | | | | | | |
| V_S | supply voltage primary side | 21.6 | 24 | 26.4 | V | |
| I_{SO} | supply current primary side (+ external current sensors) | | 270 | 1200 | mA | |
| V_{IT+} | Input threshold voltage (HIGH) | | | 0,7*Vs | V | |
| V_{IT-} | Input threshold voltage (LOW) | 0.3*Vs | | | V | |
| R_{IN} | Input resistance | | 10 | | k Ω | |
| I_{TRIPSC} | Over current trip level | | 3600 | | A _{PEAK} | |
| T_{tp} | Over temperature protection level | | 100 | | $^{\circ}\text{C}$ | |
| Mechanical Data | | | | | | |
| dv/dt _{AIR} | required airflow per fan | 620 | | | m ³ /h | |
| w | approx. total weight | | 110 | | kg | |
| Size | Width x Depth x Height (with fan) | 1122 | 752 | 544 | mm | |
| T_{stg} | w/o need of reforming the caps | -20 | | 40 | $^{\circ}\text{C}$ | |
| T_{amb} | | -20 | | 55 | $^{\circ}\text{C}$ | |
| T_{hs} | | | | | $^{\circ}\text{C}$ | |
| Alltitude | installation height w/o derating | | | 1000 | m | |
| Protection | | | IP00 | | | |
| Pollution | EN 50178 | | 2 | | | |
| Fan Data | | | | | | |
| Fan | included in the stack (NO) | | | | | |
| Type | (SKF 16 O-230-01) | | | | | |
| V_{Fan} | Fan voltage | | 230 | | V | |
| f_{FAN} | Fan frequency | | 50 | | Hz | |
| I_{FAN} | Fan current | | 1.3 | | A | |
| P_{FAN} | Fan power | | 300 | | W | |

PIN Array X1

| PIN | Signal | Function | Specifications |
|-------|--------------|---|---|
| X1:01 | IF_PWR_VP | Power Supply | Supply voltage +24V _{DC} (±10%) IN |
| X1:02 | IF_PWR_GND | IF_HB | |
| X1:03 | IF_PWR_VP | Power Supply | Supply voltage +24V _{DC} (±10%) IN |
| X1:04 | IF_PWR_GND | GND_for_IF_PWR_VP | |
| X1:05 | IF_PWR_VP | Power Supply | Supply voltage +24V _{DC} (±10%) IN |
| X1:06 | IF_PWR_GND | GND_for_IF_PWR_VP | |
| X1:07 | IF_CMN_rsvd | Reserved | |
| X1:08 | IF_CMN_GND | GND for IF_CMN_nHALT, IF_CMN_rsvd | |
| X1:09 | IF_CMN_nHALT | Status signal | Digital IF_PWR_VP logic LOW (dominant) = not ready to operate HIGH (recessive) = ready to operate |
| X1:10 | IF_CMN_GPIO | General purpose IO | Inverted IF_CMN_nHALT signal Signal propagation time to IF_CMN_nHALT signal: 100µs (typ.) |
| X1:11 | IF_CMN_ANLG0 | Temperature analog out | Max. output current: 5mA Turns ratio: 100mV/°C Max. voltage range: +15V Nominal voltage range: 0...10V |
| X1:12 | IF_CMN_AGND0 | GND for IF_CMN_ANLG0 | |
| X1:13 | IF_CMN_ANLG1 | U _{DC} analog out | Max. output current: 5mA Turns ratio: 10mV/V Max. voltage range: +15V Nominal voltage range: 0...10V |
| X1:14 | IF_CMN_AGND1 | GND for IF_CMN_ANLG1 | |
| X1:15 | IF_HB1_TOP | Switching signal input (HB1 TOP switch) | Digital IF_PWR_VP logic LOW = TOP switch off HIGH = TOP switch on |
| X1:16 | IF_HB1_BOT | Switching signal input (HB1 BOT switch) | Digital IF_PWR_VP logic LOW = BOT switch off HIGH = BOT switch on |
| X1:17 | IF_HB1_rsvd | Reserved | |
| X1:18 | IF_HB1_GND | GND for IF_HB1_TOP, IF_HB1_BOT, IF_HB1_rsvd | |
| X1:19 | IF_HB1_ANLG | I analog out HB1 | Max. output current: 5mA Turns ratio: 3mV/A Max. voltage range: ±15V Nominal voltage range: -10...10V |
| X1:20 | IF_HB1_AGND | GND for IF_HB1_ANLG | |

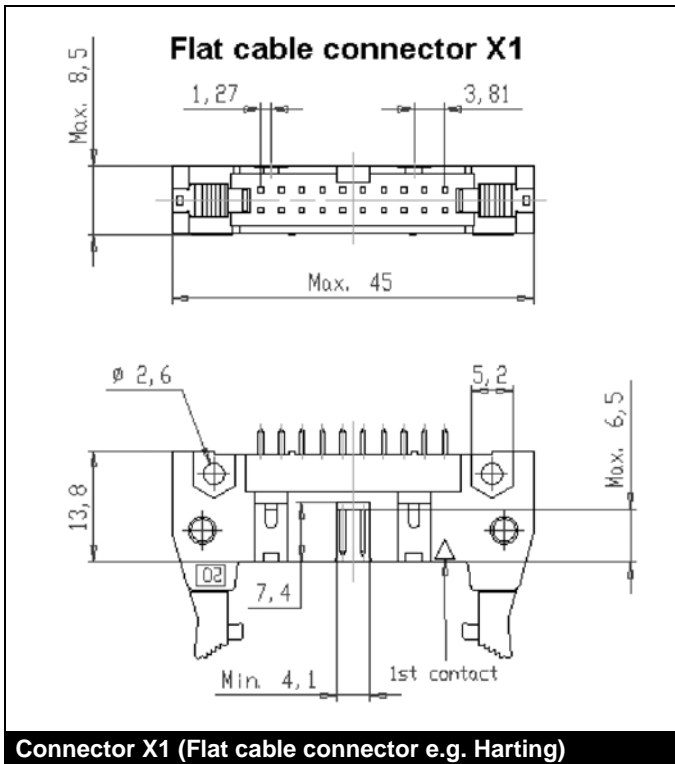

Connector X1 (Flat cable connector e.g. Harting)

Product information of suitable female connectors and distributor contact information is available at e.g. <http://www.harting.com> (part number 09 18 520 7 813 – female connector with strain relief clamp).

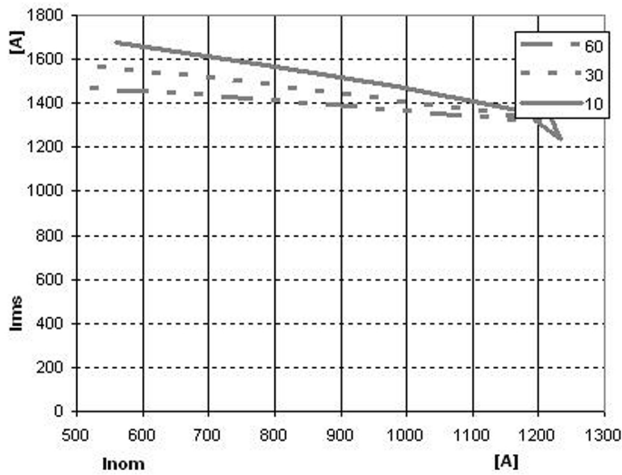


Fig. 1 Maximum overload current, $T_{amb} = 40\text{ °C}$

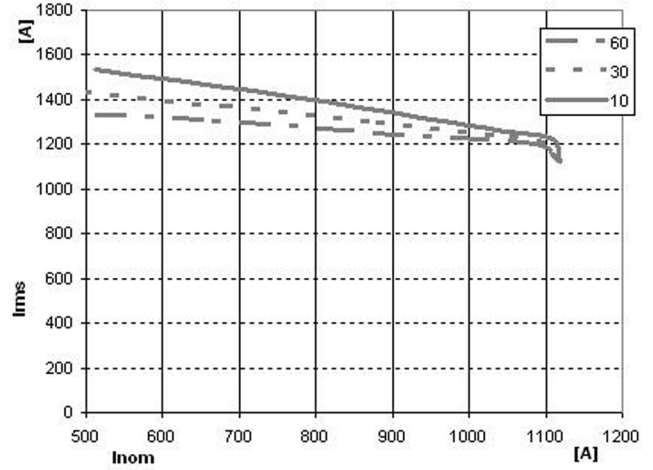


Fig. 2 Maximum overload current, $T_{amb} = 50\text{ °C}$

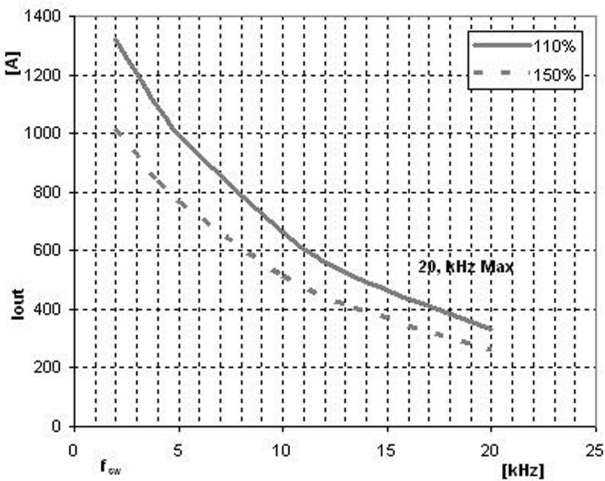


Fig. 3 Max permanent inverter curr. vs. f_{sw} , $T_{amb}=40\text{ °C}$

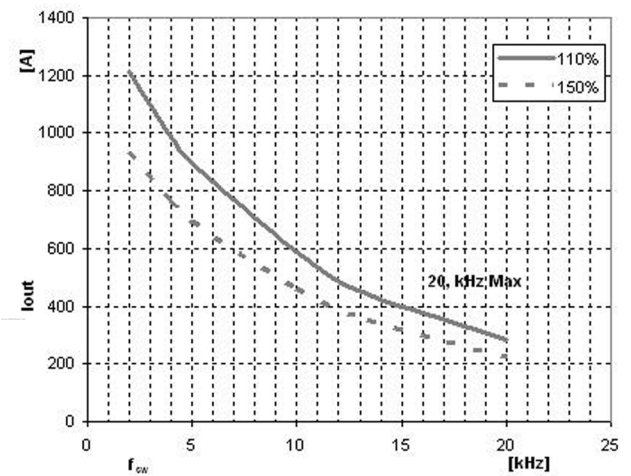


Fig. 4 Max. permanent inverter curr. vs. f_{sw} , $T_{amb}=50\text{ °C}$

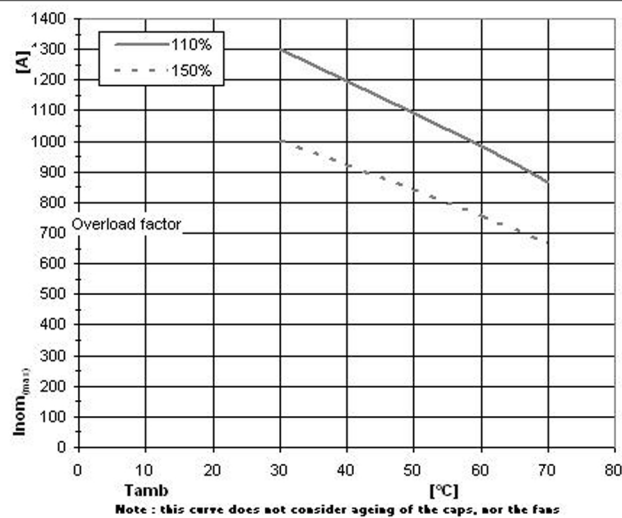


Fig. 5 Max. nominal curr. vs. ambient temperature



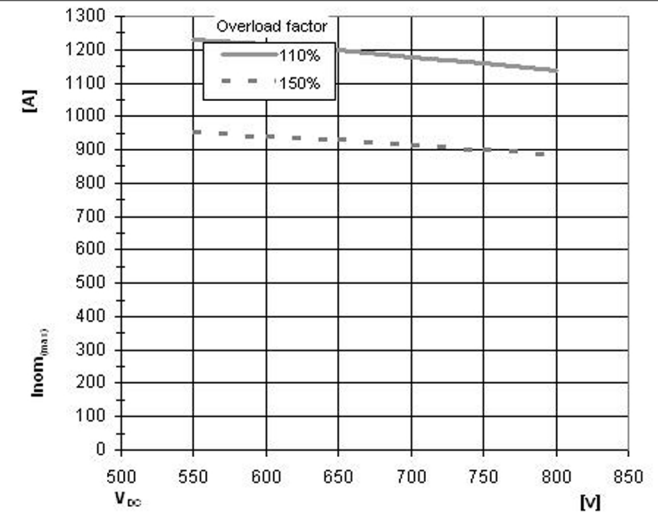


Fig. 6 Maximum nominal current vs. DC Link voltage

IGD-8-326-E1F12-BH-FA

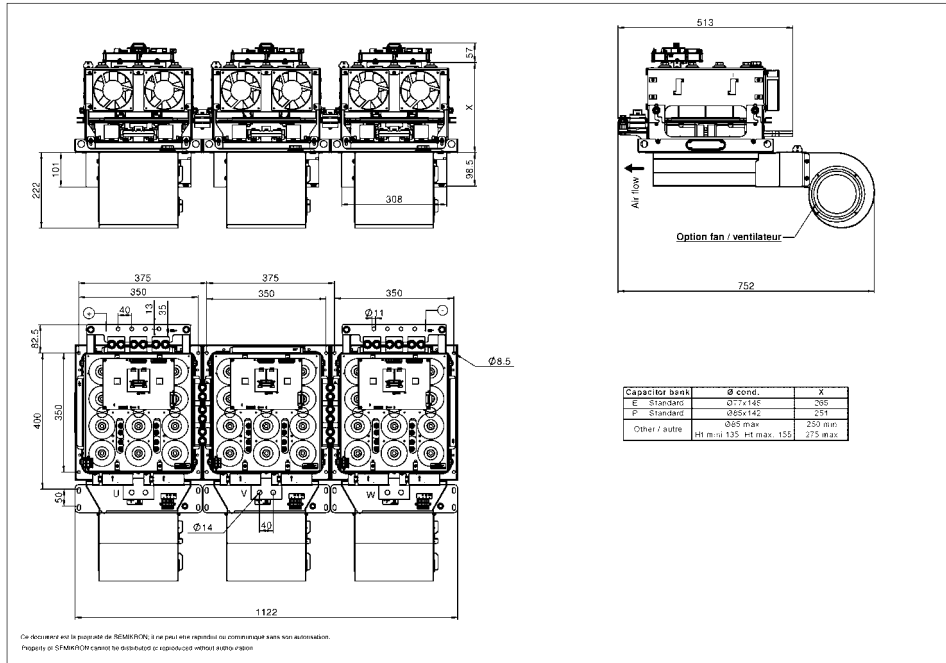

SEMIKUBE GD-8HA, Px308/308

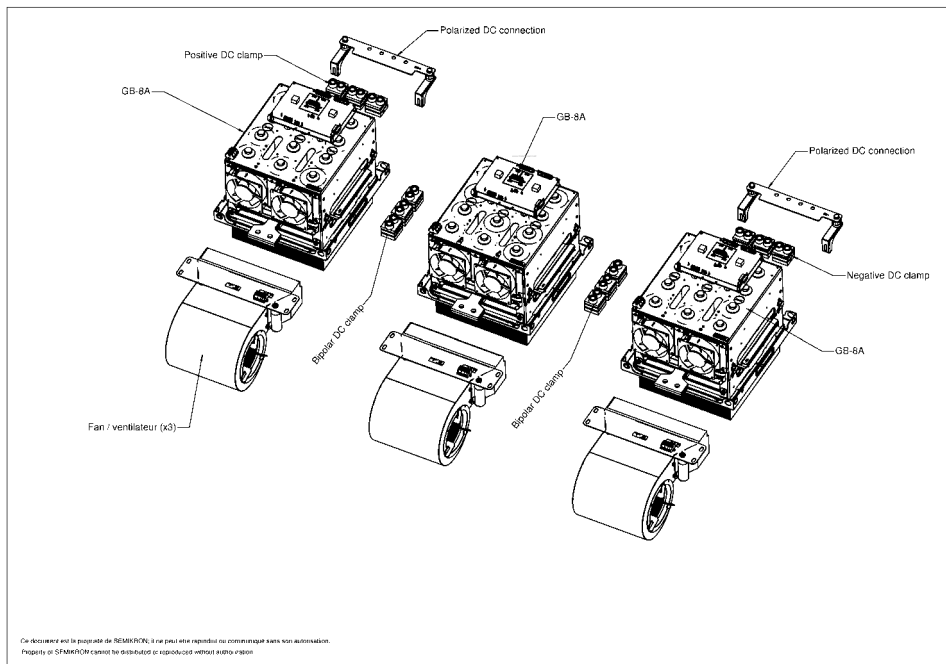

3D view of the SEMIKUBE Size '3'

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.