

# IGD-8-426-E1F12-BH-FA



**IGBT Module Stack**

## Three-phase inverter

### SEMIKUBE - Size 3H

IGD-8-426-E1F12-BH-FA

Preliminary Data

#### Features

- Highly compact
- Integrated current, voltage and temperature sensors
- Easy maintenance
- Easy mounting and dismounting
- Very high Life-Time Expectancy
- Very low inductive DC bus


#### Typical Applications

- Industrial
- AC motor control
- UPS
- Solar inverter
- Oil and gas pumps

No. 08800900

#### Footnotes

Electrical parameters to be derated for  $T_{amb} > 40^{\circ}\text{C}$

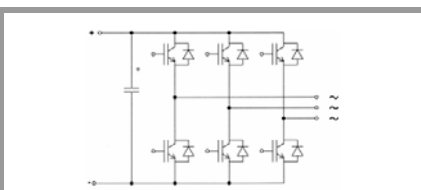


**B6CI**

Characteristics						
Symbol	Conditions	min.	typ.	max.	Unit	
<b>Electrical Data</b>						
$I_{rms}$	$T_{amb}=40^{\circ}\text{C}$ , 3kHz, 650V <sub>dc</sub> , 400V <sub>ac</sub> , cos=0,85	no overload		1490	A	
		110% overload, 60s every 10min		1460	1600	A
		150% overload, 60s every 10min		1140	1700	A
$V_{CES}$				1200	V	
$f_{sw}$	max. switching frequency			15.6	kHz	
$V_{DC}$	DC voltage applied to the capacitor bank			750	V	
$V_{AC}$	network voltage (line side), -20% / +15%			460	V	
$V_{isol}$	50Hz / 1min			2500	V	
$P_{tot}$	$T_{amb}=40^{\circ}\text{C}$			11720	W	
$T_j$	$T_{vj}$ for continuous operation	-40		125	$^{\circ}\text{C}$	
<b>Capacitor Data</b>						
$C_{DC}$	SKC4M7-40A1		42.3		mF	
C			Electrolyt			
LTE	expected lifetime calculated, forced air cooling	60			kHrs	
		30			kHrs	
<b>Controller Interface Data</b>						
$V_S$	supply voltage primary side	21.6	24	26.4	V	
$I_{SO}$	supply current primary side (+ external current sensors)		270	1200	mA	
$V_{IT+}$	Input threshold voltage (HIGH)			$0,7 \cdot V_S$	V	
$V_{IT-}$	Input threshold voltage (LOW)	$0,3 \cdot V_S$			V	
$R_{IN}$	Input resistance		10		k $\Omega$	
$I_{TRIPSC}$	Over current trip level		3600		A <sub>PEAK</sub>	
$T_{tp}$	Over temperature protection level		100		$^{\circ}\text{C}$	
<b>Mechanical Data</b>						
$dv/dt_{AIR}$	required airflow per fan	620			m <sup>3</sup> /h	
w	approx. total weight		110		kg	
Size	Width x Depth x Height (with fan)	1122	752	544	mm	
$T_{stg}$	w/o need of reforming the caps	-20		40	$^{\circ}\text{C}$	
$T_{amb}$		-20		55	$^{\circ}\text{C}$	
$T_{hs}$					$^{\circ}\text{C}$	
Alltitude	installation height w/o derating			1000	m	
Protection			IP00			
Pollution	EN 50178		2			
<b>Fan Data</b>						
Fan	included in the stack ( <b>NO</b> )					
Type	(SKF 16 O-230-01)					
$V_{Fan}$	Fan voltage		230		V	
$f_{FAN}$	Fan frequency		50		Hz	
$I_{FAN}$	Fan current		1.3		A	
$P_{FAN}$	Fan power		300		W	

## PIN Array X1

PIN	Signal	Function	Specifications
X1:01	IF_PWR_VP	Power Supply	Supply voltage +24V <sub>DC</sub> (±10%) IN
X1:02	IF_PWR_GND	IF_HB	
X1:03	IF_PWR_VP	Power Supply	Supply voltage +24V <sub>DC</sub> (±10%) IN
X1:04	IF_PWR_GND	GND_for_IF_PWR_VP	
X1:05	IF_PWR_VP	Power Supply	Supply voltage +24V <sub>DC</sub> (±10%) IN
X1:06	IF_PWR_GND	GND_for_IF_PWR_VP	
X1:07	IF_CMN_rsvd	Reserved	
X1:08	IF_CMN_GND	GND for IF_CMN_nHALT, IF_CMNrsrvd	
X1:09	IF_CMN_nHALT	Status signal	Digital IF_PWR_VP logic LOW (dominant) = not ready to operate HIGH (recessive) = ready to operate
X1:10	IF_CMN_GPIO	General purpose IO	Inverted IF_CMN_nHALT signal Signal propagation time to IF_CMN_nHALT signal: 100µs (typ.)
X1:11	IF_CMN_ANLG0	Temperature analog out	Max. output current: 5mA Turns ratio: 100mV/°C Max. voltage range: +15V Nominal voltage range: 0...10V
X1:12	IF_CMN_AGND0	GND for IF_CMN_ANLG0	
X1:13	IF_CMN_ANLG1	U <sub>DC</sub> analog out	Max. output current: 5mA Turns ratio: 10mV/V Max. voltage range: +15V Nominal voltage range: 0...10V
X1:14	IF_CMN_AGND1	GND for IF_CMN_ANLG1	
X1:15	IF_HB1_TOP	Switching signal input (HB1 TOP switch)	Digital IF_PWR_VP logic LOW = TOP switch off HIGH = TOP switch on
X1:16	IF_HB1_BOT	Switching signal input (HB1 BOT switch)	Digital IF_PWR_VP logic LOW = BOT switch off HIGH = BOT switch on
X1:17	IF_HB1_rsvd	Reserved	
X1:18	IF_HB1_GND	GND for IF_HB1_TOP, IF_HB1_BOT, IF_HB1_rsvd	
X1:19	IF_HB1_ANLG	I analog out HB1	Max. output current: 5mA Turns ratio: 3mV/A Max. voltage range: ±15V Nominal voltage range: -10...10V
X1:20	IF_HB1_AGND	GND for IF_HB1_ANLG	

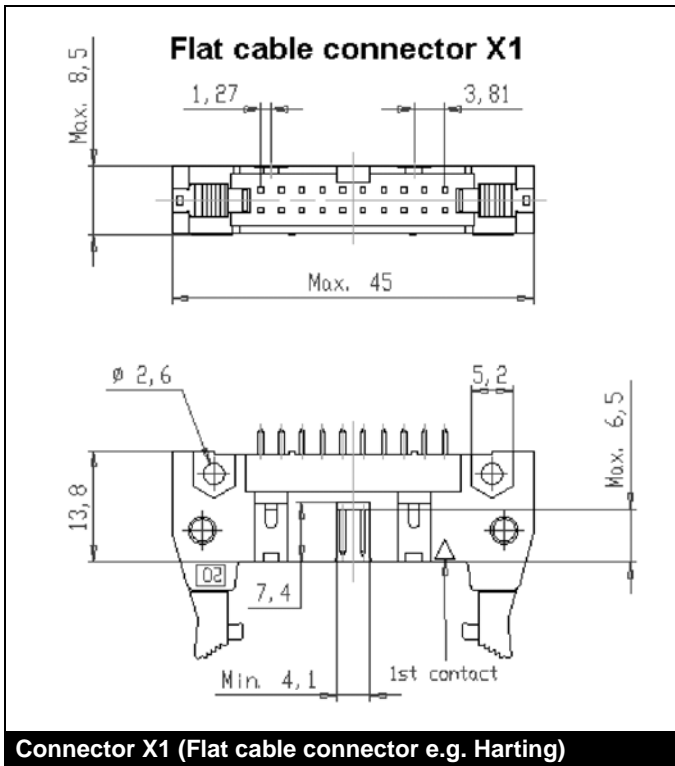

Product information of suitable female connectors and distributor contact information is available at e.g. <http://www.harting.com> (part number 09 18 520 7 813 – female connector with strain relief clamp).

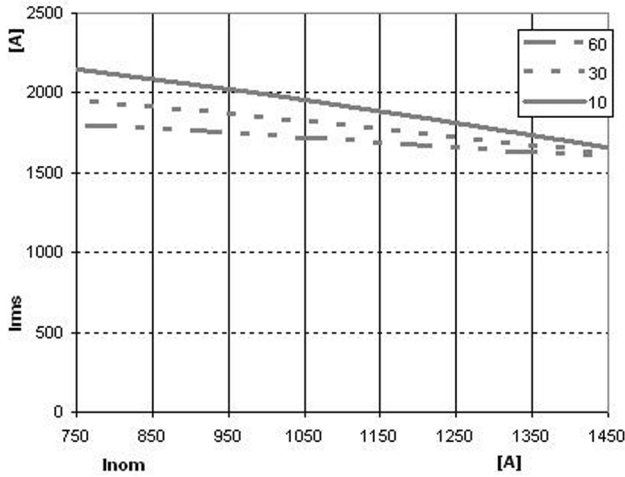


Fig. 1 Maximum overload current,  $T_{amb} = 40\text{ °C}$

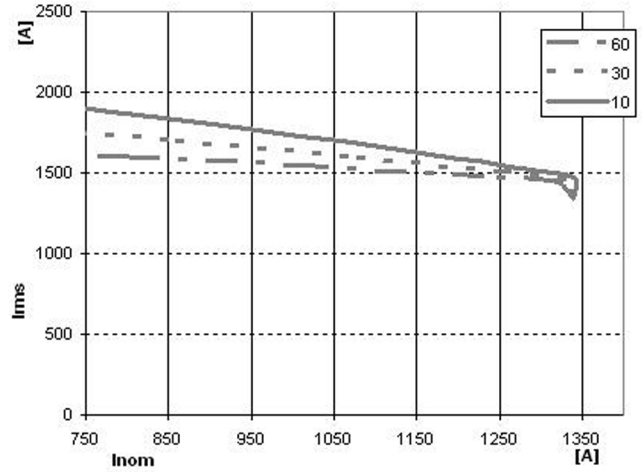


Fig. 2 Maximum overload current,  $T_{amb} = 50\text{ °C}$

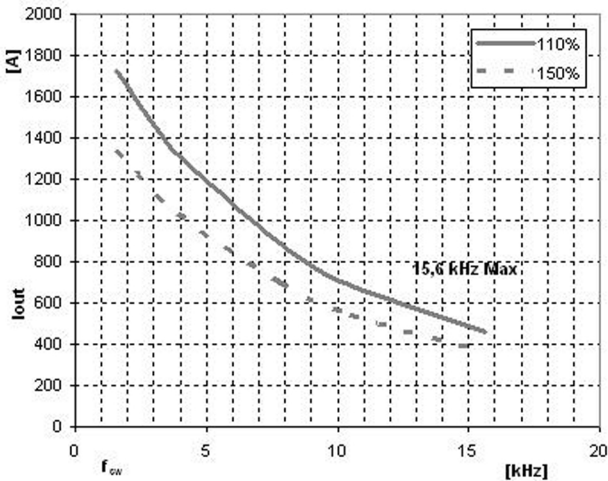


Fig. 3 Max permanent inverter curr. vs.  $f_{sw}$ ,  $T_{amb}=40\text{ °C}$

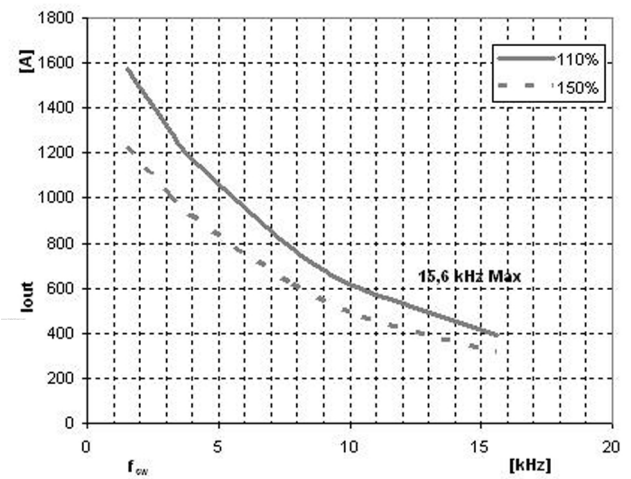


Fig. 4 Max. permanent inverter curr. vs.  $f_{sw}$ ,  $T_{amb}=50\text{ °C}$

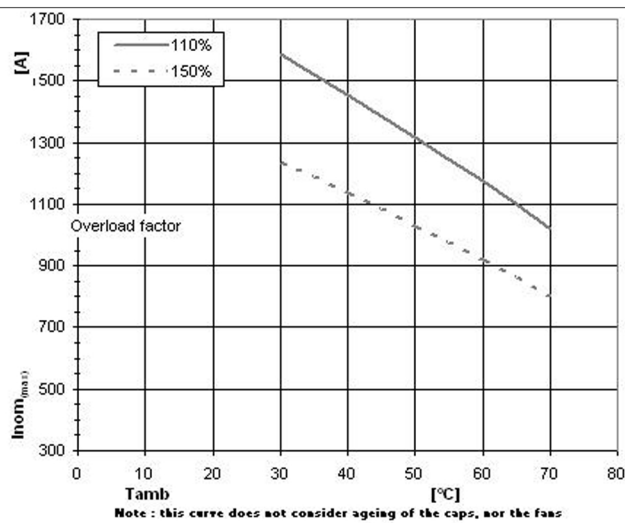


Fig. 5 Max. nominal curr. vs. ambient temperature

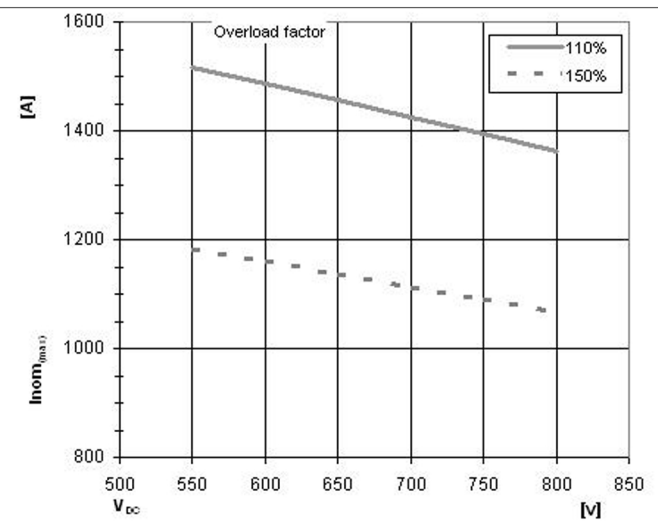


Fig. 6 Maximum nominal current vs. DC Link voltage

