


Monitoring technique

Undervoltage relay IK 9171, IL 9171,
SK 9171, SL 9171, 3-phase

varimeter

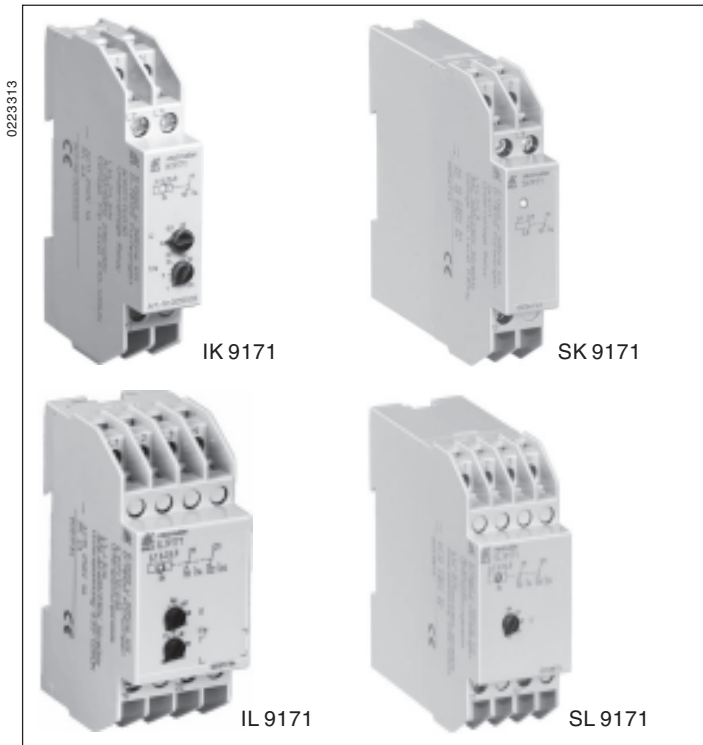


- According to IEC/EN 60 255, DIN VDE 0435-303
- **Devices available in 2 enclosure versions:**
 - I-model:** depth 59 mm, with terminals at the bottom for installation systems and industrial distribution systems according to DIN 43 880
 - S-model:** depth 98 mm, with terminals at the top for cabinets with mounting plate and cable duct
- Monitoring of undervoltage in 3-phase system
- Also for single phase
- Without auxiliary supply
- Optionally for 3p3w systems
- LED indicator for state of output relay
- Independent of phase sequence
- 1 or 2 changeover contacts
- Optionally fixed or settable response value
- As option with phase sequence detection
- Optionally with or without N
- Optionally with off-delay t_1
- Optionally with on delay t_2
- Width:
 - IK 9171, SK 9171: 17,5 mm
 - IL 9171, SL 9171: 35 mm

Approvals and marking



Function diagram

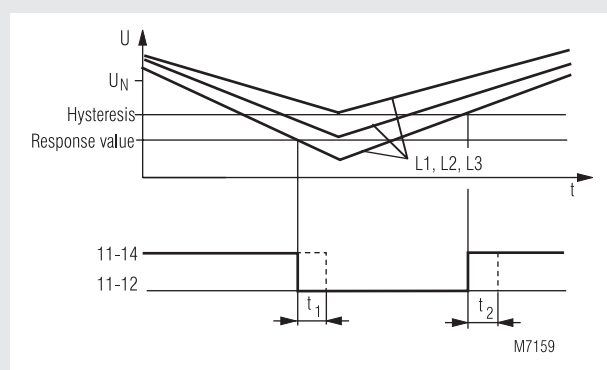

Applications

Monitoring of voltage systems on undervoltage. Automatic switching to emergency supply or of emergency light in the case of phase loss according to DIN VDE 0100-710 or DIN VDE 0108.


Variant with t_2 is used in unstable voltage systems, where after phase failure detection the consumers should be energized one after the other. This is done by setting the operate delay e.g. 0,1 ... 20 s of the different relays to different values.

This variant is also used where a consumer after only short phase failure should not be started immediately (e.g. compressors).

Function

The arithmetic mean value of each phase is measured against N. The variants without N measure L1 and L3 against L2 (IK/SK 9171) and L1 and L2 against L3 (IL/SL 9171).

Circuit diagram

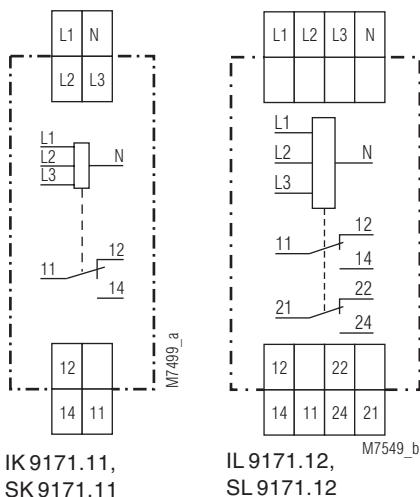

Indicators

Yellow LED: output contact active (11-14 closed)

Notes

To measure single-phase voltage terminals L1, L2, L3 have to be linked together.

The time delay t_1 is only active if the voltage L1-N (IK/SK 9171) or L3-N (IL/SL 9171) is at least $0,5 U_N$.

Technical data

Input circuit

Nominal voltage U_N

- with neutral:
 - 3 AC 110/63 V, 3 AC 220/127 V,
 - 3 AC 400/230 V, 3 AC 415/240 V,
 - 3 AC 440/254 V, 3 AC 500/290 V
- without neutral:
 - 3 AC 110 V, 3 AC 127 V, 3 AC 220 V,
 - 3 AC 400 V, 3 AC 415 V, 3 AC 440 V,
 - 3 AC 500 V
- Max overload:** 1,15 U_N continuously

Technical data

Nominal consumption

IK/SK 9171.11:	approx. 6 VA
IL/SL 9171.12:	approx. 8 VA
Frequency range:	45 ... 65 Hz

Setting ranges

Response value:	fixed: 0,7 or 0,85 U_N adjustable: 0,55 ... 1,05 U_N
Hysteresis:	approx. 4 % of setting value
Time delay t_1 / t_2:	0,5 ... 20 s
Reaction time:	approx. 100 ms

Output

Contacts

IK/SK 9171.11:	1 changeover contact
IL/SL 9171.12:	2 changeover contacts
Thermal current I_{th}:	4 A
Switching capacity to AC 15	
NO contact:	3 A / AC 230 V IEC/EN 60 947-5-1
NC contact:	1 A / AC 230 V IEC/EN 60 947-5-1
Electrical life to AC 15 at 1 A, AC 230 V:	$\geq 3 \times 10^5$ switching cycles
Short circuit strength max. fuse rating:	4 A gL IEC/EN 60 947-5-1
Mechanical life:	$\geq 30 \times 10^6$ switching cycles

General data

Operating mode:	Continuous operation
Temperature range:	- 20 ... + 60 °C
Clearance and creepage distances rated impuls voltage / pollution degree:	4 kV / 2 IEC 60 664-1
EMC	
Electrostatic discharge:	8 kV (air) IEC/EN 61 000-4-2
HF irradiation:	10 V / m IEC/EN 61 000-4-3
Fast transients:	2 kV IEC/EN 61 000-4-4
Surge voltages between wires for power supply: between wire and ground:	1 kV IEC/EN 61 000-4-5 2 kV IEC/EN 61 000-4-5
Interference suppression:	Limit value class B EN 55 011
Degree of protection:	Housing: IP 40 IEC/EN 60 529 Terminals: IP 20 IEC/EN 60 529
Housing:	Thermoplastic with V0 behaviour according to UL subject 94
Vibration resistance:	Amplitude 0,35 mm, frequency 10 ... 55 Hz, IEC/EN 60 068-2-6
Climate resistance:	20 / 060 / 04 IEC/EN 60 068-1
Terminal designation:	EN 50 005
Wire connection:	2 x 2,5 mm ² solid or 2 x 1,5 mm ² stranded ferruled DIN 46 228-1/-2/-3/-4
Wire fixing:	Flat terminals with self-lifting clamping piece IEC/EN 60 999-1
Mounting:	DIN rail IEC/EN 60 715
Weight	
IK 9171:	65 g
SK 9171:	83 g
IL 9171:	110 g
SL 9171:	137 g

Dimensions

Width x height x depth

IK 9171:	17,5 x 90 x 59 mm
SK 9171:	17,5 x 90 x 98 mm
IL 9171:	35 x 90 x 59 mm
SL 9171:	35 x 90 x 98 mm

Standard type

IK 9171.11/200 3/N AC 400/230 V 50/60 Hz 0,85 U_N	
Article number:	0049292 stock item
SK 9171.11/200 3/N AC 400/230V 50/60Hz 0,85 U_N	
Article number:	0054744
• Output:	1 changeover contact
• Nominal voltage U_N :	3/N AC 400/230 V
• Detection of undervoltage at < 0,85 U_N	
• Fixed response value:	0,85 U_N
• No time delay	
• For 3p3w connection	
• Width:	17,5 mm

Variants

I_ 9171/001	
0	NC circuit operation with N
1	NC circuit operation without N
0	without time delay
3	settable time delay t_1
4	settable time delay t_2
0	settable response value
2	fixed response value
K	width 17,5 mm
L	width 35 mm

IK 9171.11/034:	- with settable time t_1 - NC circuit operation without N - detection of phase sequence
-----------------	---

Ordering example for Variants

IK 9171 .11 / _ _ _ 3 AC 400 V 50/60 Hz 0,55 ... 1,05 U_N 0,5 ... 20 s	
	Time delay t_2
	Response value
	Nominal frequency
	Nominal voltage
	Variant, if required
	Contact
	Type