


5-V Low-Drop Fixed-Voltage Regulator

ILE4264G

ILE 4264 G is a 5-V low-drop fixed-voltage regulator in an SOT-223 package. The IC regulates an input voltage V_i in the range $5.5\text{ V} < V_i < 45\text{ V}$ to $V_{Qrated} = 5.0\text{ V}$. The maximum output current is more than 120 mA. This IC is shortcircuit-proof and features temperature protection that disables the circuit at overtemperature.

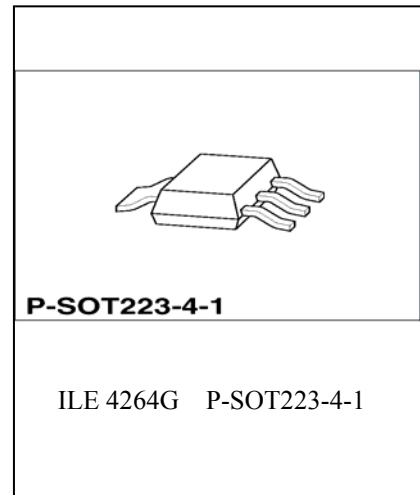

Features:

- Output voltage tolerance $\leq \pm 2\%$
- Low-drop voltage
- Very low current consumption
- Overtemperature protection
- Short-circuit proof
- Suitable for use in automotive electronics
- Reverse polarity.

Dimensioning Information on External Components

The input capacitor C_i is necessary for compensating line influences. Using a resistor of approx. $1\ \Omega$ in series with C_i , the oscillating of input inductivity and input capacitance can be clamped. The output capacitor C_o is necessary for the stability of the regulating circuit. Stability is guaranteed at values $C_o \geq 10\ \mu\text{F}$ and an $\text{ESR} \leq 10\ \Omega$ within the operating temperature range.


Pin Definitions and Functions

Pin	Symbol	Function
1	V_i	Input voltage; block to ground directly on IC with ceramic capacitor
2, 4	GND	Ground
3	V_o	5-V output voltage; block to ground with $\geq 10\text{-}\mu\text{F}$ Ω capacitor, $\text{ESR} < 10\ \Omega$

Circuit Description

The control amplifier compares a reference voltage, which is kept highly precise by resistance adjustment, to a voltage that is proportional to the output voltage and drives the base of the series transistor via a buffer. Saturation control, working as a function of load current, prevents any over-saturation of the power element. The IC is additionally protected against overload, overtemperature and reverse polarity.

Pin Configuration
(top view)

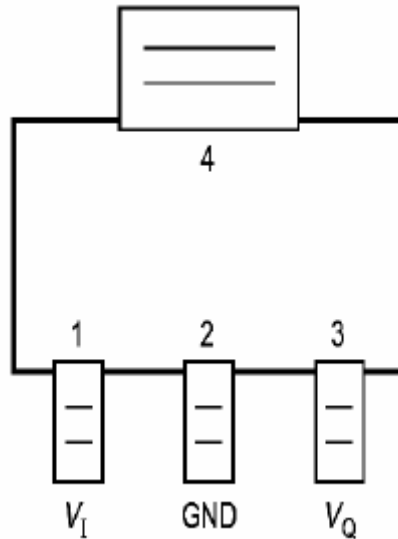


Absolute Maximum Ratings

$T_j = -40$ to 150 °C

Parameter	Symbol	Limit Values		Unit	Notes
		min.	max		
Input					
Input voltage	V_I	-42	45	V	-
Input current	I_I	-	-	-	limited internally
Output					
Output voltage	V_Q	-1	16	V	-
Output current	I_Q	-	-	-	limited internally
Ground					
Current	I_{GND}	50	-	mA	-
Temperatures					
Junction temperature	T_j	-	150	°C	-
Storage temperature	T_{stg}	-50	150	°C	-
Operating Range					
Input voltage	V_I	5.5	45	V	-
Junction temperature	T_j	-40	150	°C	-
Thermal Resistances					
System-air	$R_{th SA}$	-	100	K/W	soldered in
System-case	$R_{th SC}$	-	25	K/W	-

Block Diagram

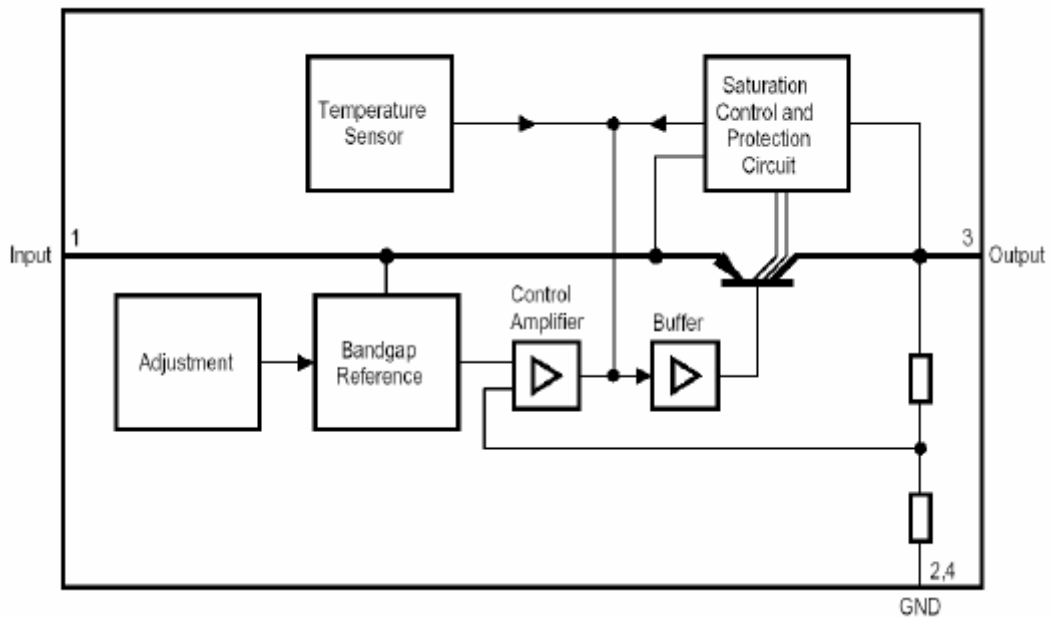


Characteristics


$V_I = 13.5\text{ V}; -40\text{ }^\circ\text{C} \leq T_j \leq 125\text{ }^\circ\text{C}$, unless specified otherwise

Parameter	Symbol	Limit Values			Unit	Test Condition
		min	Typ	Max		
Output voltage	V_Q	4.9	5.0	5.1	V	$5\text{ mA} \leq I_Q \leq 100\text{ mA}$ $6\text{ V} \leq V_I \leq 28\text{ V}$
Output-current limiting	I_Q	120	150	–	mA	–
Current consumption $I_q = I_I - I_Q$	I_q	–	–	400	μA	$I_Q = 1\text{ mA}$
Current consumption $I_q = I_I - I_Q$	I_q	–	10	15	mA	$I_Q = 100\text{ mA}$
Drop voltage	V_{dr}	–	0.25	0.5	V	$I_Q = 100\text{ mA}_{(1)}$
Load regulation	ΔV_Q	–	–	40	mV	$I_Q = 5\text{ to }100\text{ mA}$ $V_I = 6\text{ V}$
Supply-voltage regulation	ΔV_Q	–	15	30	mV	$V_I = 6\text{ to }28\text{ V}$ $I_Q = 5\text{ mA}$
Supply voltage suppression	SVR	–	54	–	dB	$f_r = 100\text{ Hz}$ $V_r = 0.5\text{ Vpp}$


Application Circuit

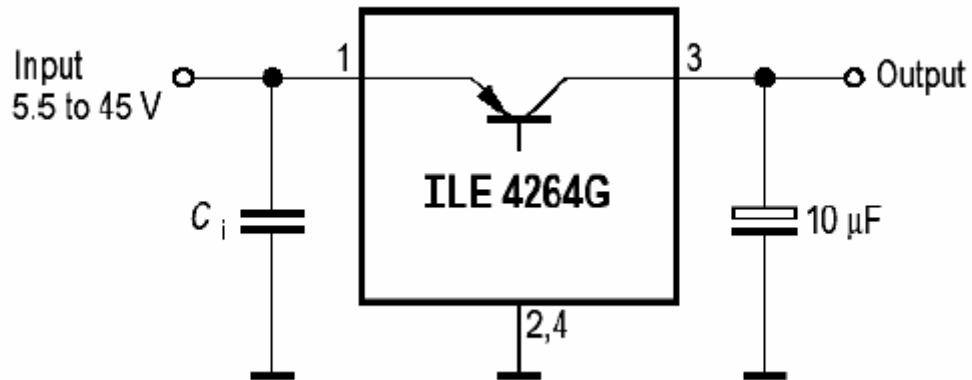


Drop Voltage V_{Dr} versus Output Current I_O

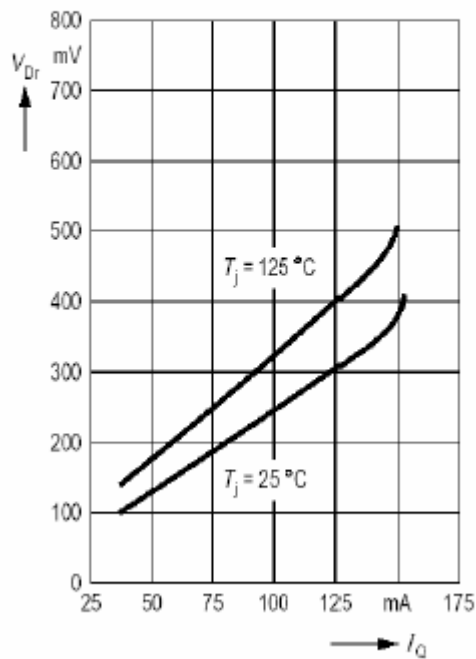


Current Consumption I_q versus Input Voltage V_i

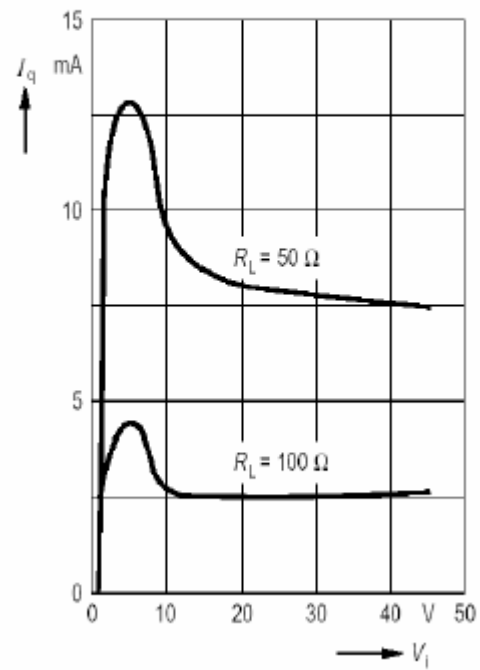


Current Consumption I_q versus Output Current I_Q

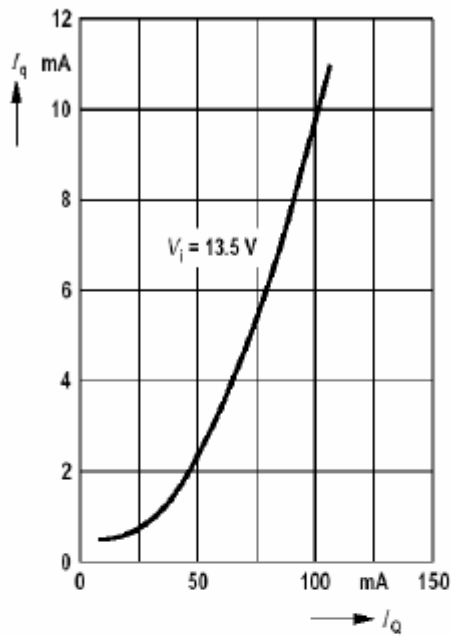


Current Consumption I_q versus Output Current I_Q

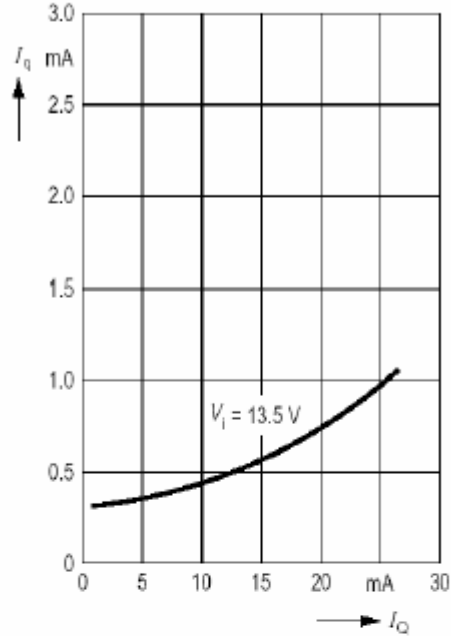

Output Voltage V_Q versus Temperature T_j

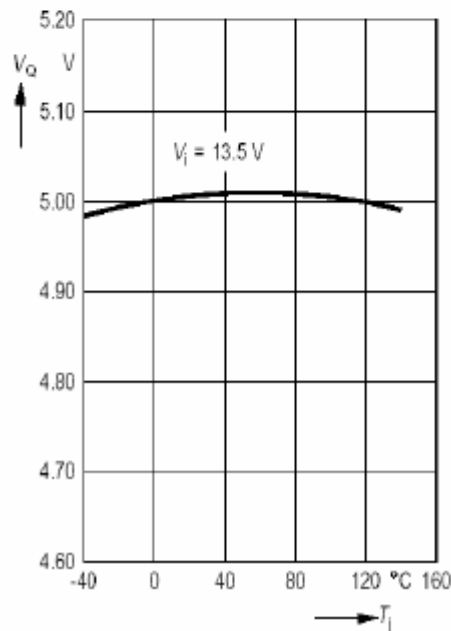

Output Current I_Q versus Input Voltage V_i

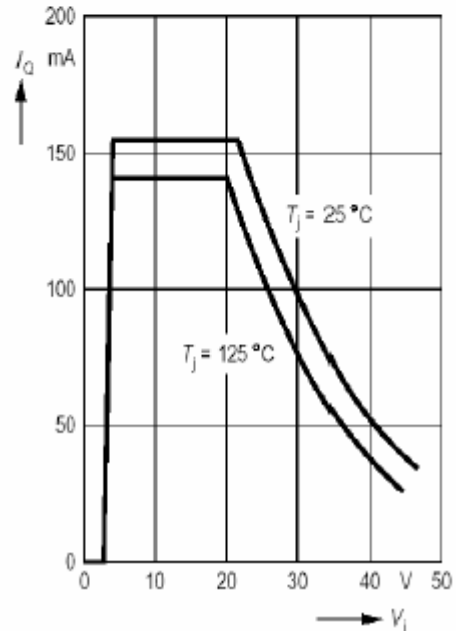

Package Dimensions

P-SOT 223-4-1

