


**MICROCIRCUIT ILX3221N INTERFACE TRANSCEIVER OF THE SERIAL DATA OF THE STANDARD RS -232**

**(compatible to MAX3221 (MAXIM USA))**


Microcircuits ILX3221 is interface transceiver of serial data under RS - 232 standard with single power supply source & bipolar output voltage of transmitter, forming by build-in voltage multiplier on 4 external capacities, 0.1 μF. ILX3221 correspond to EIA/TIA-232E, V.28 standard and is purposed for application in modern high efficient calculating systems with the wide range of supply voltage, fast-operating electronic devices with high level of fidelity of information exchange among distant devices.



**N SUFFIX  
DIP**

**IC marking in package**  
ILX3221N Plastic DIP  
T<sub>A</sub>= from -40 to 85 °C

**Pinning**

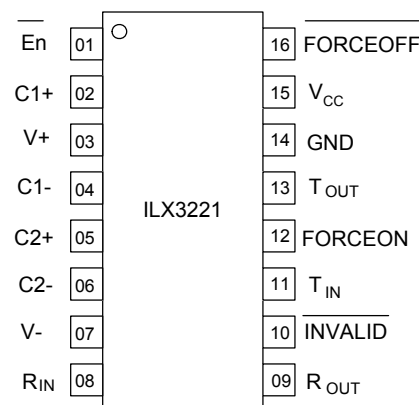

**Functions and structure:**

- Microcircuit contains 1 transmitter and 1 receivers of the serial data of the standard RS-232.
- AutoShutdown function provide low power consumption. Supply
- The microcircuit supply voltage range is from 3.0 to 5.5 V.
- The microcircuits is available in 16-pin DIP-package (MS-001BB).

**Truth table**


| Mode   | Inputs  |          |    |                   |                 | Outputs          |                  |
|--|---------|----------|----|-------------------|-----------------|------------------|------------------|
|  | FORCEON | FORCEOFF | En | R <sub>IN</sub>   | T <sub>IN</sub> | R <sub>OUT</sub> | T <sub>OUT</sub> |
| Low power consumption<br>(without Autoshutdown function) | X       | L        | L  | L                 | X               | H                | Z                |
|  | X       | L        | L  | H                 | X               | L                | Z                |
|  | X       | L        | H  | X                 | X               | Z                | Z                |
| Data transfer<br>(without Autoshutdown function)         | H       | H        | L  | L                 | L               | H                | H                |
|  | H       | H        | L  | L                 | H               | H                | L                |
|  | H       | H        | L  | H                 | H               | L                | L                |
|  | H       | H        | H  | X                 | L               | Z                | H                |
|  | H       | H        | H  | X                 | H               | Z                | L                |
| Data transfer<br>(with Autoshutdown function)            | L       | H        | L  | L                 | L               | H                | H                |
|  | L       | H        | L  | L                 | H               | H                | L                |
|  | L       | H        | L  | H                 | L               | L                | H                |
|  | L       | H        | H  | X                 | H               | Z                | L                |
|  | L       | H        | H  | X                 | L               | Z                | H                |
| Low power consumption<br>(with Autoshutdown function)    | L       | H        | L  | L <sub>INVL</sub> | X               | H                | Z                |
|  | L       | H        | H  | L <sub>INVL</sub> | X               | Z                | Z                |

Note - H – high level;  
 - L – low level;  
 - X – any level (H or L);  
 - L<sub>INVL</sub> – low level signal not less than -0.3 V & not more than 0.3 V with duration not less that t<sub>PHLINV</sub>;  
 - Z – third state of output

Truth table for  $\overline{\text{INVALID}}$  pin

| $R_{\text{IN}}$   | $\overline{\text{INVALID}}$ |
|-------------------|-----------------------------|
| L                 | H                           |
| H                 | H                           |
| $L_{\text{INVL}}$ | L                           |

Functional diagram

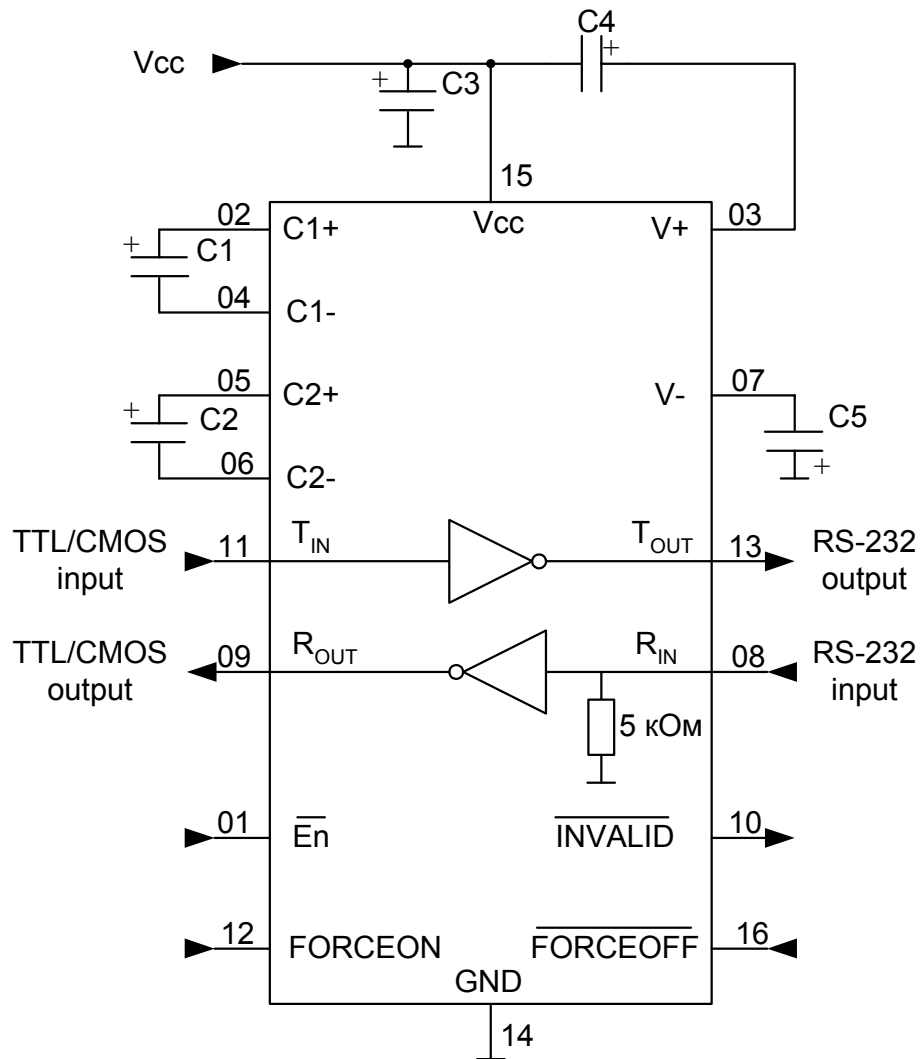

C1 – capacitor  $0.1 \mu\text{F} \pm 10 \%$  for  $U_{\text{CC}} = 3.3 \text{ V} \pm 10\%$  ( $0.047 \mu\text{F} \pm 10 \%$  for  $U_{\text{CC}} = 5.0 \text{ V} \pm 10\%$ )

C2, C4, C5– capacitors  $0.1 \mu\text{F} \pm 10 \%$  for  $U_{\text{CC}} = 3.3 \text{ V} \pm 10\%$  ( $0.33 \mu\text{F} \pm 10 \%$  for  $U_{\text{CC}} = 5.0 \text{ V} \pm 10\%$ )

C3 – capacitor  $0.1 \mu\text{F} \pm 10 \%$

**Pin description table**

| Pin number | Symbol                | Pin description   |
|------------|-----------------------|---|
| 01         | $\overline{E_n}$      | Receiver enable control input   |
| 02         | C1+                   | Positive terminal of the voltage multiplier charge-pump capacitor   |
| 03         | V+                    | Positive voltage multiplier output  |
| 04         | C1-                   | Negative terminal of the voltage multiplier charge-pump capacitor   |
| 05         | C2+                   | Positive terminal of the voltage multiplier charge-pump capacitor   |
| 06         | C2-                   | Negative terminal of the voltage multiplier charge-pump capacitor   |
| 07         | V-                    | Negative voltage multiplier output  |
| 08         | R <sub>IN</sub>       | RS-232 Receiver data inputs   |
| 09         | R <sub>OUT</sub>      | TTL/CMOS Receiver data output   |
| 10         | $\overline{INVALID}$  | Output of the valid signal detector. Indicates if a valid RS-232 level is present on receiver inputs logic "1". |
| 11         | T <sub>IN</sub>       | TTL/CMOS transmitter data input   |
| 12         | FORCEON               | Autoshutdown mode control input (enable active operation of the IC)   |
| 13         | T <sub>OUT</sub>      | RS-232 transmitter data outputs   |
| 14         | GND                   | Common pin  |
| 15         | V <sub>cc</sub>       | Supply voltage  |
| 16         | $\overline{FORCEOFF}$ | Autoshutdown mode control input (switch the IC to low power consumption mode )                                  |

**Maximum Ratings & Recommended Operating Conditions**

| Parameter, unit  | Symbol                         | Recommended operating conditions |                 | Maximum rate |                      |
|--|--------------------------------|----------------------------------|-----------------|--------------|----------------------|
|  |                                | min                              | max             | min          | max                  |
| Supply voltage, V  | U <sub>CC</sub>                | 3.0                              | 5.5             | -0.3         | 6.0                  |
| Voltage applied to transmitter output, B   | U <sub>OT</sub>                | -                                | -               | -13,2        | 13.2                 |
| Multiplier positive output voltage, V  | U <sub>+</sub>                 | 5.0                              | -               | -0,3         | 7.0                  |
| Multiplier negative output voltage, V  | U <sub>-</sub>                 | -5.0                             | -               | -7,0         | 0.3                  |
| Receiver input voltage, V  | U <sub>IR</sub>                | -25                              | 25              | -25          | 25                   |
| Receiver output voltage, V   | U <sub>OR</sub>                | -                                | -               | -0,3         | U <sub>CC</sub> +0.3 |
| Transmitter low level input voltage, V   | U <sub>IL</sub>                | 0                                | 0.8             | -0,3         | -                    |
| Transmitter high level input voltage, V  | U <sub>IH</sub>                | 2.0<br>(U <sub>CC</sub> =3.3 V)  | U <sub>CC</sub> | -            | 6                    |
|  |                                | 2.4<br>(U <sub>CC</sub> =5.0 V)  |                 |              |                      |
| Multiplier outputs voltages difference, V  | U <sub>+,+ U<sub>-</sub></sub> | -                                | -               | -            | 13                   |
| Receiver low level threshold input voltage, V  | U <sub>ITL</sub>               | 0.6<br>(U <sub>CC</sub> =3.3 V)  | -               | -            | -                    |
|  |                                | 0.8<br>(U <sub>CC</sub> =5.0 V)  |                 |              |                      |
| Receiver high level threshold input voltage, V   | U <sub>ITH</sub>               | -                                | 2.4             | -            | -                    |
| Receiver threshold input voltage corresponding to low level on $\overline{INVALID}$ pin , V  | U <sub>INVL</sub>              | -0.3                             | 0.3             | -            | -                    |
| Receiver threshold input voltage corresponding to high level on $\overline{INVALID}$ pin , V | U <sub>INVH</sub>              | -2.7                             | 2.7             | -            | -                    |

**Electric parameters**

| Parameter, unit  | Symbol              | Norm |      | Mode  | T <sub>A</sub> , °C |
|--|---------------------|------|------|---|---------------------|
|  |                     | Min  | Max  |   |                     |
| AutoShutdown mode supply current, $\mu$ A                      | I <sub>CC1</sub>    | -    | 10   | U <sub>CC</sub> = 3.3; 5.0 V;<br>FORCEON is connected to GND;   | 25±10               |
|  |                     |      | 14   | FORCEOFF is connected to V <sub>CC</sub><br>R <sub>IN</sub> not connected   | -40; 85             |
| Low power consumption mode supply current, $\mu$ A             | I <sub>CC2</sub>    | -    | 10   | U <sub>CC</sub> = 3.3; 5.0 V;<br>FORCEOFF is connected to   | 25±10               |
|  |                     |      | 14   | GND<br>R <sub>IN</sub> connected to GND   | -40; 85             |
| AutoShutdown Disabled supply current, $\mu$ A                  | I <sub>CC3</sub>    | -    | 1.0  | U <sub>CC</sub> = 3.3 V; 5.0 V;<br>FORCEON &  | 25±10               |
|  |                     |      | 1.4  | FORCEOFF is connected to V <sub>CC</sub><br>without load  | -40; 85             |
| Low level input leakage current (for control inputs), $\mu$ A  | I <sub>ILL</sub>    | -    | -0.5 | U <sub>CC</sub> = 5.5 V   | 25±10               |
|  |                     |      | -1.0 |   | -40; 85             |
| High level input leakage current (for control inputs), $\mu$ A | I <sub>ILH</sub>    | -    | 0.5  | U <sub>CC</sub> = 5.5 V   | 25±10               |
|  |                     |      | 1.0  |   | -40; 85             |
| <b>Receiver</b>  |                     |      |      |   |                     |
| Low level output voltage, V                                    | U <sub>OLR</sub>    | -    | 0.3  | U <sub>CC</sub> = 3.3V ±10%; U <sub>ITL</sub> = 2.4V;<br>I <sub>OL</sub> = 1.6 mA; U <sub>INVH</sub> = 2.7 V  | 25±10               |
|  |                     |      | 0.4  |   | -40; 85             |
|  |                     |      | 0.3  | U <sub>CC</sub> = 5.0V ±10%; U <sub>ITL</sub> = 2.4V;<br>I <sub>OL</sub> = 1.6 mA; U <sub>INVH</sub> = 2.7 V  | 25±10               |
|  |                     |      | 0.4  |   | -40; 85             |
| High level output voltage, V                                   | U <sub>OHR1</sub>   | -    | 2.5  | U <sub>CC</sub> = 3.3V ±10%; U <sub>ITL</sub> = 0.6 V;<br>I <sub>OH</sub> = -1.0 mA; U <sub>INVH</sub> = -2.7 V   | 25±10               |
|  |                     |      | 2.37 |   | -40; 85             |
|  | U <sub>OHR2</sub>   | -    | 4.0  | U <sub>CC</sub> = 5.0V ±10%; U <sub>ITL</sub> = 0.8 V;<br>I <sub>OH</sub> = -1.0 mA; U <sub>INVH</sub> = -2.7 V   | 25±10               |
|  |                     |      | 3.9  |   | -40; 85             |
| Receiver hysteresis, V   | U <sub>hR</sub>     | 0.2  | 1.0  | U <sub>CC</sub> = 3.3 V ± 10%; 5.0 V ± 10%  | 25±10               |
| Low level output voltage, V (for INVALID pin)                  | U <sub>OLINV</sub>  | -    | 0.3  | U <sub>CC</sub> = 3.3V ±10 %; I <sub>OL</sub> = 1.6 mA;<br>U <sub>INVL</sub> = 0.3 V or -0.3 V;<br>FORCEON is connected to GND;<br>FORCEOFF is connected to V <sub>CC</sub>   | 25±10               |
|  |                     |      | 0.4  |   | -40; 85             |
|  |                     |      | 0.3  | U <sub>CC</sub> = 5.0V ±10 %; I <sub>OL</sub> = 1.6 mA;<br>U <sub>INVL</sub> = 0.3 V or -0.3 V;<br>FORCEON is connected to GND;<br>FORCEOFF is connected to V <sub>CC</sub>   | 25±10               |
|  |                     |      | 0.4  |   | -40; 85             |
| High level output voltage, V (for INVALID pin)                 | U <sub>OHINV1</sub> | -    | 2.5  | U <sub>CC</sub> = 3.3 V ±10 %; I <sub>OH</sub> = -1.0 mA;<br>U <sub>INVH</sub> = 2.7 V or -2.7 V;<br>FORCEON is connected to GND;<br>FORCEOFF is connected to V <sub>CC</sub> | 25±10               |
|  |                     |      | 2.37 |   | -40; 85             |
|  | U <sub>OHINV2</sub> | -    | 4.0  | U <sub>CC</sub> = 5.0V ±10%; I <sub>OH</sub> = -1.0 mA;<br>U <sub>INVH</sub> = 2.7 V or -2.7 V;<br>FORCEON is connected to GND;<br>FORCEOFF is connected to V <sub>CC</sub>   | 25±10               |
|  |                     |      | 3.9  |   | -40; 85             |


Electric parameters

| Parameter, unit  | Symbol                                    | Norm |               | Mode  | T <sub>A</sub> , °C |                  |
|--|---|------|---------------|---|---------------------|------------------|
|  |   | Min  | Max           |   |                     |                  |
| Receiver   |   |      |               |   |                     |                  |
| Low level output current for OFF-state, μA                                   | I <sub>OZLR</sub>                         | -    | -2.5<br>-10   | Receiver output is disabled;<br>U <sub>CC</sub> =5.5 V; U <sub>O</sub> = 0 V                      | 25±10<br>-40; 85    |                  |
| High level output current for "OFF"-state, μA                                | I <sub>OZHR</sub>                         | -    | 2.5<br>10     | Receiver output is disabled;<br>U <sub>CC</sub> =5.5 V; U <sub>O</sub> = 5.5 V                    | 25±10<br>-40; 85    |                  |
| Input resistance, kOhm   | R <sub>I</sub>                            | 3    | 7             | -   | 25±10               |                  |
| OFF-ON switching propagation delay, ns                                       | t <sub>PHLR</sub> ,<br>t <sub>PLHR</sub>  | -    | 500           | U <sub>CC</sub> = 5.0V ±10 %;<br>C <sub>L</sub> = 150 pF;   |                     |                  |
| Propagation delays difference, ns  | t <sub>SKD</sub>                          | -    | 200           | U <sub>IL</sub> = 0 V;<br>U <sub>IH</sub> = 3.0 V;<br>t <sub>LH</sub> = t <sub>HL</sub> ≤ 10 ns   |                     |                  |
| Propagation delay of transition from high (low) level state to OFF-state, ns | t <sub>PLZR</sub><br>(t <sub>PHZR</sub> ) | -    | 400           | U <sub>CC</sub> = 5.0V ±10 %;<br>U <sub>IL</sub> = 0 V;<br>U <sub>IH</sub> = 3.0 V;               |                     |                  |
| Propagation delay of transition from OFF-state to high (low) level state, ns | t <sub>PZLR</sub><br>(t <sub>PZHR</sub> ) | -    | 400           | t <sub>LH</sub> = t <sub>HL</sub> ≤ 10 ns;<br>C <sub>L</sub> = 150 pF;<br>R <sub>L</sub> = 1 kOhm |                     |                  |
| Propagation delay of transition <u>INVALID</u> pin to low level state, μs    | t <sub>PHLINV</sub>                       | -    | 80            | U <sub>CC</sub> = 5.0V ±10 %;<br>U <sub>IL</sub> = 0; -3.0 V;<br>U <sub>IH</sub> = 3.0; 0 V;      |                     |                  |
| Propagation delay of transition <u>INVALID</u> pin to high level state, μs   | t <sub>PLHINV</sub>                       | -    | 2.9           | t <sub>LH</sub> = t <sub>HL</sub> ≤ 10 ns;<br>C <sub>L</sub> = 15 pF                              |                     |                  |
| Transmitter  |   |      |               |   |                     |                  |
| Low level output voltage, V  | U <sub>OLT1</sub>                         | -    | -5.07<br>-5.0 | U <sub>CC</sub> =3.3V ±10%; U <sub>IH</sub> = 2.0V;<br>R <sub>L</sub> = 3 kOhm                    |                     | 25±10<br>-40; 85 |
|  | U <sub>OLT2</sub>                         | -    | -5.07<br>-5.0 | U <sub>CC</sub> =5.0V ±10%; U <sub>IH</sub> = 2.4V;<br>R <sub>L</sub> = 3 kOhm                    |                     | 25±10<br>-40; 85 |
| High level output voltage, V   | U <sub>OHT</sub>                          | 5.07 | -             | U <sub>CC</sub> =3.3V ±10%; U <sub>IL</sub> = 0.8V;<br>R <sub>L</sub> = kOhm                      |                     | 25±10<br>-40; 85 |
|  |   | 5.07 | -             | U <sub>CC</sub> =5.0V ±10%; U <sub>IL</sub> = 0.8V;<br>R <sub>L</sub> = kOhm                      | 25±10<br>-40; 85    |                  |
|  |   | 5.0  | -             |   |                     |                  |
| Transmitter hysteresis, V  | U <sub>HT</sub>                           | 0.1  | 1,0           | U <sub>CC</sub> = 3.3 V ± 10%; 5.0 V ± 10%  | 25±10               |                  |
| Output resistance , Ohm  | R <sub>O</sub>                            | 350  | -             | U <sub>CC</sub> = U <sub>V+</sub> *= U <sub>V-</sub> * = 0 V;<br>U <sub>O</sub> = ±2 V            | 25±10<br>-40; 85    |                  |
|  |   | 300  |               |   |                     |                  |
| Short circuit current, mA  | I <sub>OS</sub>                           | -    | 53            | U <sub>CC</sub> = 3.63 V;   | 25±10               |                  |
|  |   |      | 60            | U <sub>IH</sub> = 2.0V  | -40; 85             |                  |
|  |   |      | -53           | U <sub>CC</sub> = 3.63 V;   | 25±10               |                  |
|  |   |      | -60           | U <sub>IH</sub> = 2.0V  | -40; 85             |                  |
|  |   |      | 53            | U <sub>CC</sub> = 5.5 V;  | 25±10               |                  |
|  |   |      | 60            | U <sub>IH</sub> = 2.0V  | -40; 85             |                  |
|  |   |      | -53           | U <sub>CC</sub> = 5.5 V;  | 25±10               |                  |
|  |   |      | -60           | U <sub>IH</sub> = 2.0V  | -40; 85             |                  |
| Low level output current for OFF-state, uA                                   | I <sub>OZLT</sub>                         | -    | -10<br>-25    | U <sub>CC</sub> = 0; 3.3; 5.5 V;<br>U <sub>O</sub> = -12 V; transmitter output is disabled        | 25±10<br>-40; 85    |                  |


Electric parameters

| Parameter, unit                             | Symbol            | Norm |          | Mode  | T <sub>A</sub> , °C |
|---|-------------------|------|----------|---|---------------------|
|   |                   | Min  | Max      |   |                     |
| Transmitter                                 |                   |      |          |   |                     |
| High level output current for OFF-state, μA | I <sub>OZHT</sub> | -    | 10<br>25 | U <sub>CC</sub> = 0; 3.3; 5.5 V<br>U <sub>O</sub> = 12 V; transmitter output is disabled  | 25±10<br>-40; 85    |
| Maximum Data Rate, Kbit/s                   | ST                | 250  | -        | R <sub>L</sub> = 3 kOhm; C <sub>L</sub> = 1000 pF   | -40÷85              |
| Transition-Region Slew Rate, V/us           | SR                | 6    | 30       | U <sub>CC</sub> = 3.3 V; R <sub>L</sub> = (3-7) kOhm;<br>U <sub>OT</sub> is changing from +3 to -3 V<br>or from -3 to +3 V;<br>C <sub>L</sub> = (150-1000) pF                     | 25±10               |
| Propagation delays difference, ns           | t <sub>SKEW</sub> | -    | 300      | U <sub>CC</sub> = 5.0V ±10 %;<br>U <sub>IL</sub> = 0 V; U <sub>IH</sub> = 3.0 V;<br>t <sub>LH</sub> = t <sub>HL</sub> ≤ 10 ns;<br>R <sub>L</sub> =3 kOhm; C <sub>L</sub> =1000 pF |                     |
| Transmitter output enable time, μS          | t <sub>WU</sub>   | -    | 120      | U <sub>CC</sub> = 5.0V ±10 %;<br>U <sub>IL</sub> = 0 V; U <sub>IH</sub> = 3.0 V;<br>U <sub>IL</sub> = -3.0 V; U <sub>IH</sub> = 0 V   |                     |


\* U<sub>V+</sub>, U<sub>V-</sub> - voltages applied to pins 03 , 07.  
 Note – Electric parameters is indicated for C1=0.047 uF, C2-C4 = 0.33 μF & U<sub>CC</sub> = 5.0 V±10 %  
 (or C1-C4 = 0.1 μF & U<sub>CC</sub> = 3.3 V±10 %)

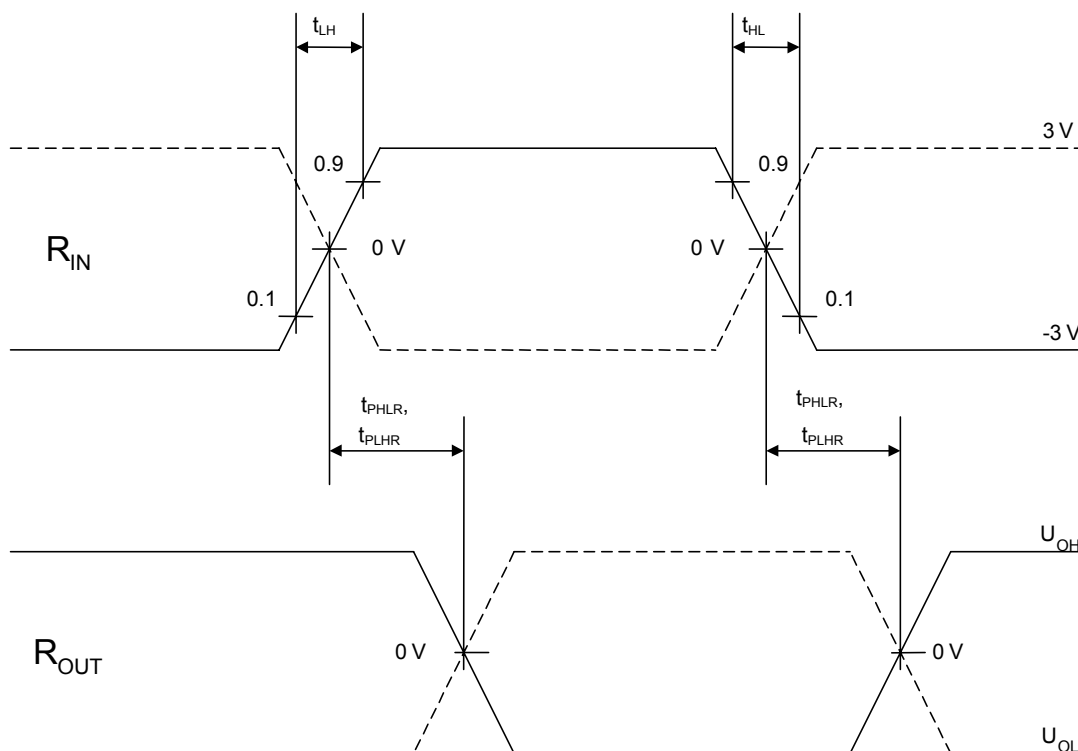


Receiver output & input signals time diagram

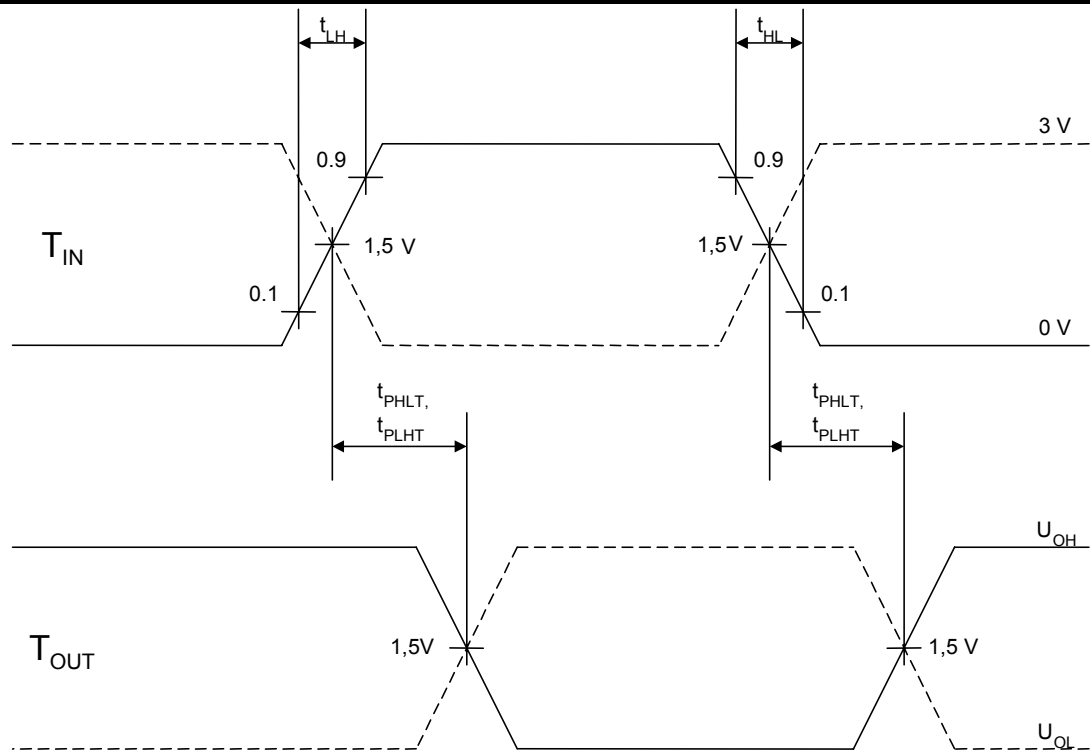


Transmitter output & input signals time diagram

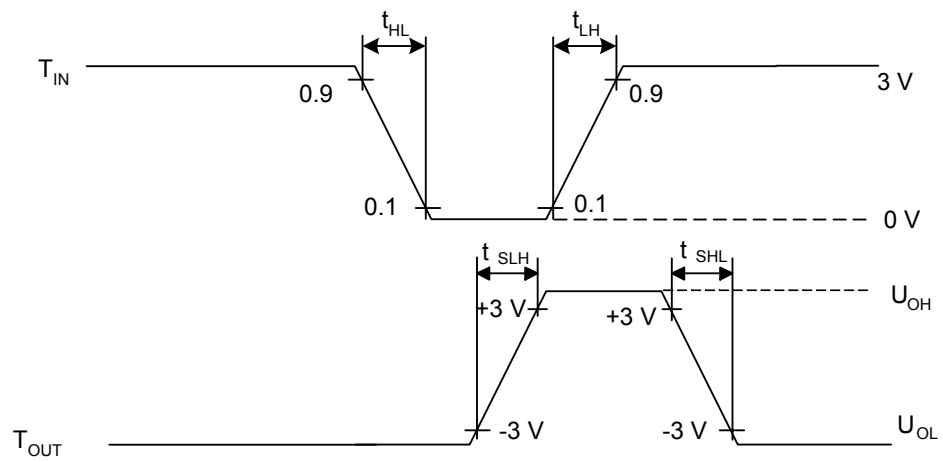

Transmitter output & input signals time diagram

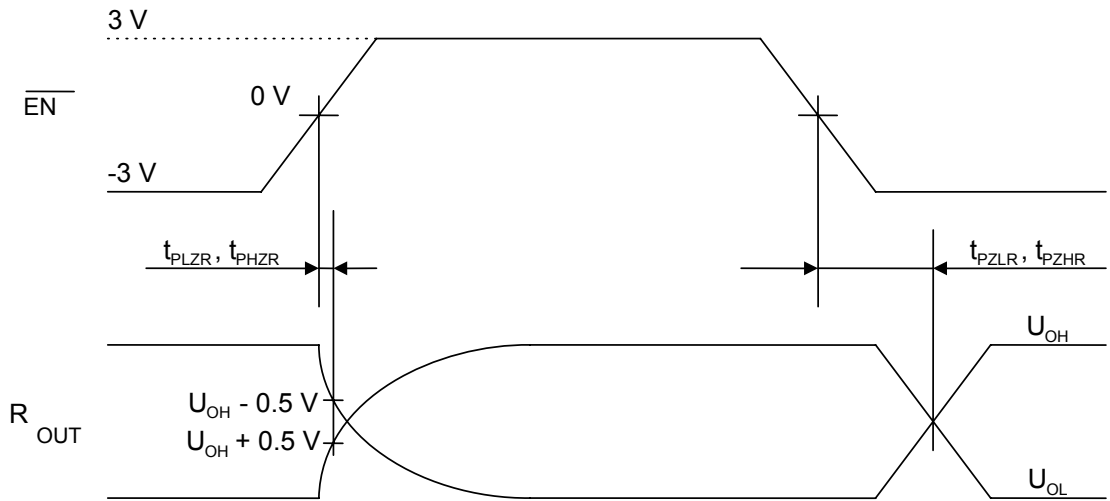


Receiver output & input signals time diagram

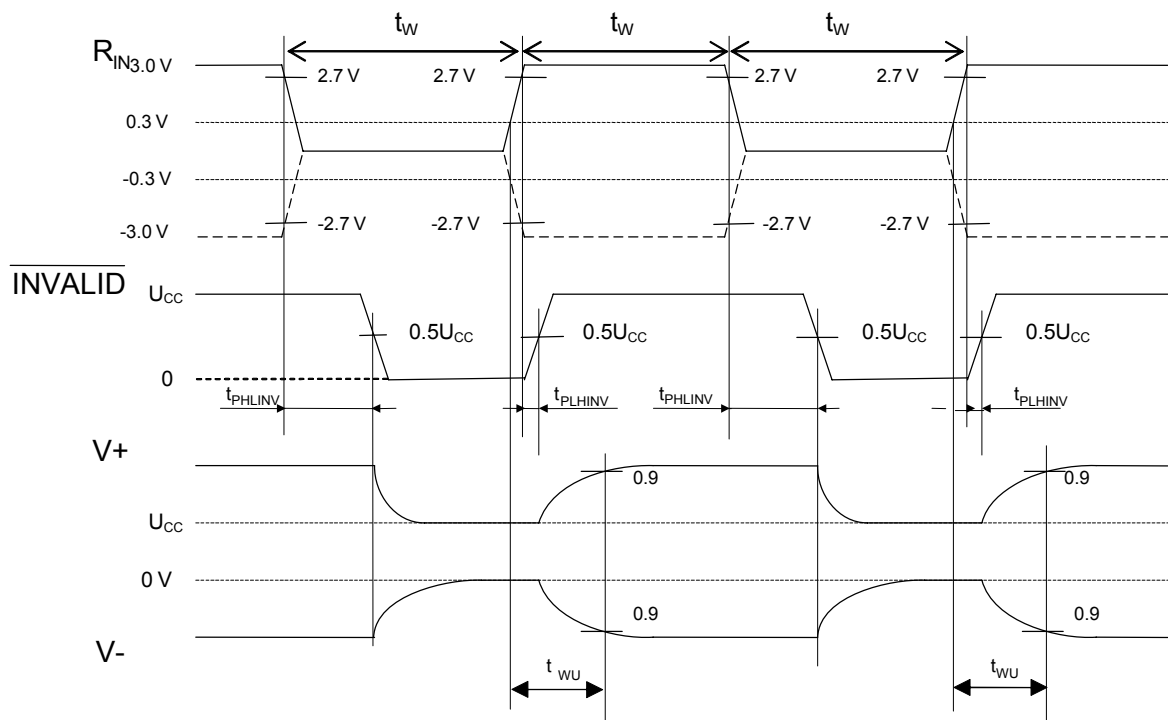

t<sub>PHLINV</sub>, t<sub>PLHINV</sub>, t<sub>WU</sub> dynamic parameters timing diagram



**Package Dimensions**  
**DIP-package MS-001BB**

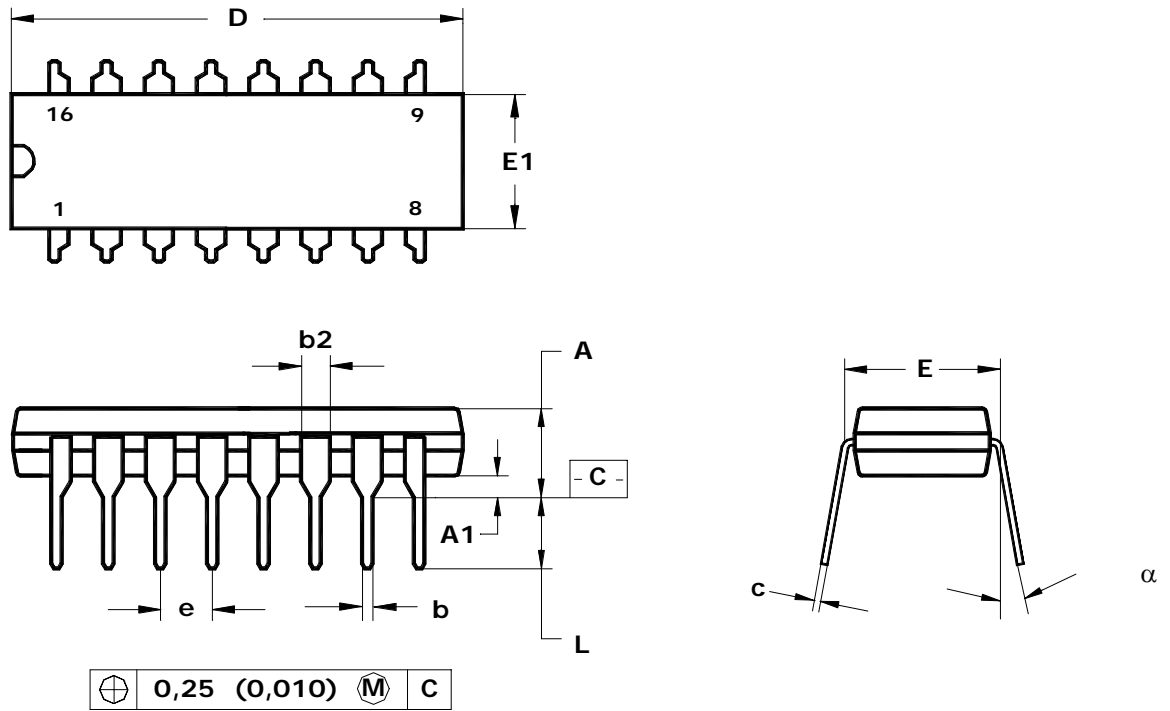

Note - Dimensions D, E1 do not include the fin value, which should not exceed 0.25 mm (0.010) per side.

|     | D      | E1    | A     | b     | b2    | e    | $\alpha$ | L     | E     | c     | A1    |
|-----|--------|-------|-------|-------|-------|------|----------|-------|-------|-------|-------|
|     | mm     |       |       |       |       |      |          |       |       |       |       |
| min | 18.93  | 6.07  | —     | 0.36  | 1.14  | 2.54 | 0°       | 2.93  | 7.62  | 0.20  | 0.38  |
| max | 19.43  | 7.11  | 5.33  | 0.56  | 1.78  |      | 15°      | 3.81  | 8.26  | 0.36  | —     |
|     | Inches |       |       |       |       |      |          |       |       |       |       |
| min | 0.355  | 0.240 | —     | 0.014 | 0.045 | 0.1  | 0°       | 0.115 | 0.300 | 0.008 | 0.015 |
| max | 0.400  | 0.280 | 0.210 | 0.022 | 0.070 |      | 15°      | 0.150 | 0.325 | 0.014 | —     |