

ABSOLUTE MAXIMUM RATINGS



Forward Current	I_F	100mA
Reverse Voltage	V_R	15V
Operating Temperature	T_{opr}	-20 to +70°C
Storage Temperature	T_{stg}	-30 to +80°C

ELECTRO-OPTICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	V_F	13.3	14.7	15.5	V	$I_F=100\text{mA}$
Reverse Current	I_R			100	μA	$V_R=15\text{V}$
Peak Wavelength	λ_p		565		nm	$I_F=100\text{mA}$
Spectral Line Half Width	$\Delta\lambda$		40		nm	$I_F=100\text{mA}$
Brightness	B	40	150		cd/m^2	$I_F=100\text{mA}$

MECHANICAL OUTLINE

CIRCUIT DIAGRAM

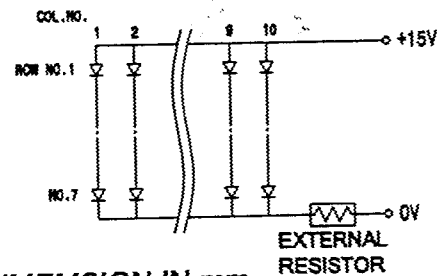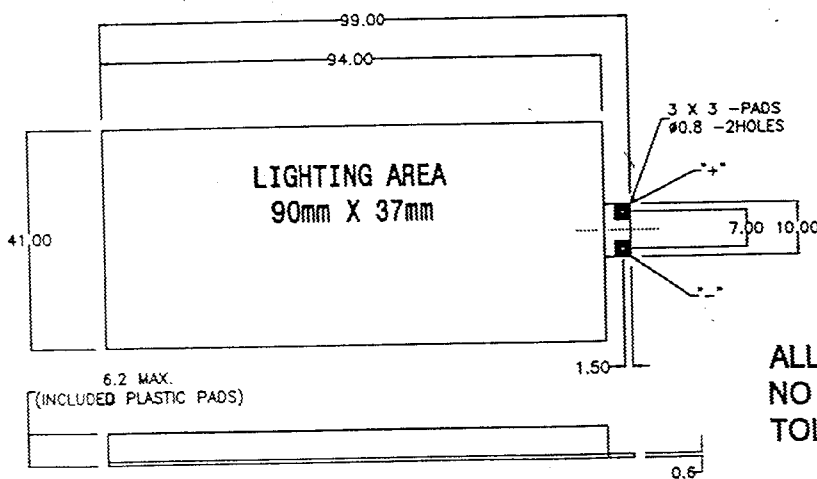

ALL DIMENSION IN mm
NO SCALE
TOL. : +/-0.3MM



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Bulding, Kwun Tong, Kowloon, Hong Kong.
Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Rev A