

Description




- A GPS disciplined OCXO incorporating sync to a 1pps input and 1pps output with tight holdover stability achieved by using an adaptive algorithm. Current internal parameters of the algorithm are available to the user via Tx and Rx commands.
- Model IQCM-100
- Model Issue number 1
- Application Information (Reference Drawing):
Connect the 1PPS output of your GPS system to the IQCM-100. A MCU can be used to monitor the working state of the IQCM-100.
- Working States (Reference Drawing):
Run1: Fast track. Adjust the OCXO 10MHz output frequency quickly to track the 1PPS to 10MHz with 1PPS reference.
Run2: Slow track. Adjust the OCXO 10MHz output frequency slowly when phase error is in the defined range.
Holdover: No 1PPS input present; an algorithm enables adaptive modelling of the frequency stability of an OCXO with reference to the GPS timing signal.
Free Run: Clock module powered up with no 1PPS input.
- Note1: The IQCM-100 should be left powered and running for 7 days minimum before operation to allow for the OCXO's internal drift to stabilise.
Note2: The adaptive module algorithm can be built after two days operation with good GPS signal, however this data will be lost at power down.
Note3: When State input (Pin 8) is set low the IQCM-100 will operate in Holdover mode regardless of the 1PPS signal condition.
- Output Data Word Example:
\$PDP,00,0,F,1,-3095,32768.0000,32768.0000,000,000,000000.
0000,00000.0000,00000.0000,00000.0000,3-23,+000.0000,-00
00,www.iqdfp.com,1,1,2011-05-16*55

(See table for full description)




Outline (mm)

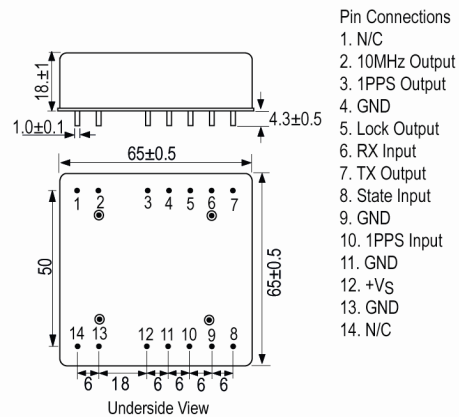

Frequency Parameters

- Frequency 10.0MHz
- Operating Temperature Range -20.00 to 75.00°C
- 10MHz RF Output Details, Pin 2:
HCMOS Compatible, 15pF load
(Sinewave 50Ω option available)
VoH: 2.7V min
VoL: 0.4V max
Rise and Fall time: 8ns max
Duty Cycle: 45/55% max
Accuracy (24-hour averaging when locked to 1PPS): ±1E-12
Short Term Stability (tested after power for 1hr ref to 25°C, 1s, using PN9000 test equipment): 2E-11 max
Ageing (Vs and temperature constant, reference to T=25°C, Vs = 5.0V and after 30 days operation): ±0.2ppb per day, ±10ppb per year

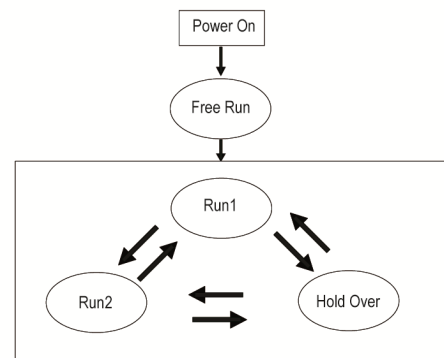

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Electrical Parameters

- Supply Voltage 5.0V ±5%
- 1PPS Reference Input, Pin 10 (50Ω test condition):
Waveform: HCMOS
ViH: 2.7V min
ViL: 0.4V max
Pulse Width: 10us min
Stability: 200ns max
- State Input, Pin 8 (<5mA load):
Lock: 2.7V min
Unlock: 0.4V max
- Power Supply Details, Pin 12:
Supply Voltage: 5.0V ±5%
Current Consumption: 2.5A during warm up, 1A steady state @25°C
Warm up time: 15mins
AC Ripple: 50mV pk-pk max, 10Hz to 1MHz
12.0V supply voltage also available, please contact our sales office for details.

Output Details

- Output Compatibility HCMOS
- 1PPS Reference Output, Pin 3 (15pF test condition):
Waveform: HCMOS
VoH: 2.7V min
VoL: 0.4V max
Pulse Width: 10μs min
Phase Accuracy
<30min after GNSS lock status: ±200ns
>30min after GNSS lock status: ±80ns
Phase Accuracy RMS
>24hrs after GNSS lock status: ±25ns
- Lock Status Indicator, Pin 5:
Module Locked: 2.7V min
Module Holdover: 0.4V max
Module Locked means Working State is = Run2
- Serial Interface (pin6 and pin7)
UART
VoL and ViL: 0.4V max
VoH and ViH: 2.7V min
Baud rate: 9600
Bits: 8
Parity: N
Stop Bit: 1

Noise Parameters

- Phase Noise on 10MHz RF output signal (dBm/Hz)

| Offset | Typical | Max |
|--------|---------|------|
| 10Hz | -125 | -120 |
| 100Hz | -140 | -135 |
| 1kHz | -148 | -143 |
| 10kHz | -152 | -147 |
| 100kHz | -155 | -150 |
| 1MHz | -155 | -150 |

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Environmental Parameters

- Operating Temperature Range: -20 to 75°C
- Storage Conditions:
 - Temperature: -55 to 105°C
 - Humidity: 30 to 80%
- Shock: IEC68-2-27 Test Ea, severity 50A, 50G 11ms half sinewave, 3 times in three mutually perpendicular axes
- Vibration: IEC 68-2-06 Test Fc, 10G, 0.75mm acceleration, 10Hz to 500Hz, 3 times in three mutually perpendicular axes

Manufacturing Details

- ESD Level:
 - ANSI/ESDA/JEDEC JS-001-2010; HBM Class 2; 2kV to 4kV
 - ANSI/ESDA/JEDEC JS-001-2010; Machine Model Class B 200V to 400V

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable


Packaging Details

- Pack Style: Bulk Loose in bulk pack
Pack Size: 1
- Alternative packing option available


Technical Notes

- Holdover stability 1.5µs in 24hrs ref ±5°C

Functional Block Diagram

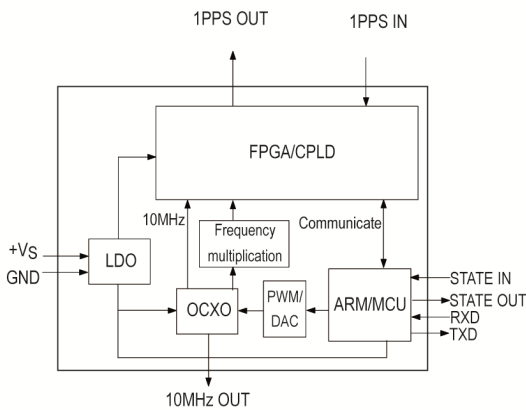

Application Information

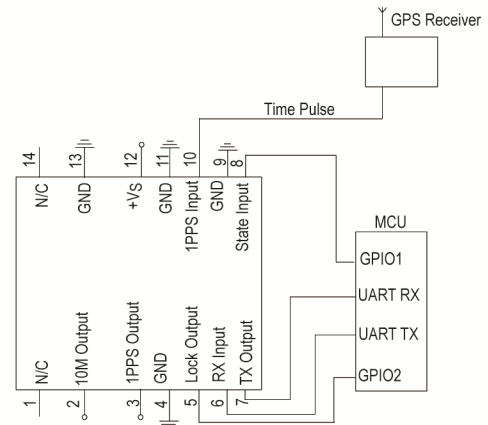

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Output Data Word (Format Key: c=Character, d=Numerical Digit, s=Sign)

| Field NO. | Name | Format | Description | Length | |
|-----------|-------------|-----------|--|--------|--|
| 0 | \$PDP\$ | \$ccc | Message ID, Protocol Header | 4 | |
| 1 | No | dd | Message No | 2 | |
| 2 | TxRxFlag | d | Transmit and Receive Flag (0 = upper computer transmit, 1 = upper computer receive) | 1 | |
| 3 | CStatus | c | Current Status (F = warm up, L = lock, H = holdover) | 1 | |
| 4 | TrackStatus | d | Track status (Q = fast track, S = slow track) | 1 | |
| 5 | cPHDiff | sdddd | Current phase difference, 1 unit = 6.25ns | 5 | |
| 6 | cPWM1 | dddd.dddd | Current PWM1 (Voltage control value1) | 10 | |
| 7 | cPWM2 | dddd.dddd | Current PWM2 (Voltage Controlled Value 2), not used, default value = 32769.000000 | 10 | |
| 8 | SYNCNT | ddd | The synchronous times | 3 | |
| 9 | HCNT | ddd | Power on hours count | 3 | |
| 10 | HPAVG | dddd.dddd | The average of the PWM in the last half hour | 10 | |
| 11 | VCH1 | dddd.dddd | Voltage Controlled compensation value every half hour | 10 | |
| 12 | HPMOD | dddd.dddd | The Module PWM Value | 10 | |
| 13 | VCM10 | dddd.dddd | Voltage controlled compensation value every 10mins | 10 | |
| 14 | POS | d-dd | The position of the product. (Layer-No), just for the inner test. | 4 | |
| 15 | TEMP | sdddd.ddd | The temperature monitor inside the module | 9 | |
| 16 | AlarmFlag | sdddd | Only the last 1 byte indicates Alarm flag (0=Normal, 1=OCXO warmup abnormal, 2=OCXOoutput abnormal, 3=Internal temperature sensor abnorm | 5 | |
| 17 | Website | | www.IQDFP.com | 13 | |
| 18 | Version | d.d | version | 3 | |
| 19 | Date | ddd-dd-dd | Date | 10 | |
| 20 | | dd | 55 | 2 | |
| 21 | END | | <CR><LF> | 2 | |

Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: 0800 1808 443

France: 0800 901 383

USA: +1.760.318.2824

 Email: info@iqdfrequencyproducts.com

 Web: www.iqdfrequencyproducts.com