



IQS227D DATASHEET

Single Channel Capacitive Proximity and Touch Controller

The **IQS227D** ProxSense® IC is a fully integrated Self Capacitive sensor with dual outputs (Touch and Proximity outputs).

Features

- > **Sub 5μA** in Low Power Mode while sensing Proximity
- > **Automatic Tuning Implementation (ATI)** - Automatic tuning of sense electrode
- > **Internal Capacitor Implementation (ICI)** - reference capacitor on-chip
- > Supply voltage: 2.4 V to 5 V
- > Minimum external components
- > Data streaming option
- > Advanced on-chip digital signal processing
- > User selectable (OTP) :
 - 4 Power Modes
 - IO sink/ source
 - Time-out for stuck key
 - Output mode (Direct/Latch/Toggle)
 - Proximity and Touch Button sensitivity



RoHS2
Compliant

6 pin DFN-6
Representation only, not
actual markings

Applications

- > LCD, Plasma & LED TVs
- > GSM cellular telephones - On ear detection / touch keys
- > LED flashlights or headlamps
- > White goods and appliances
- > Office equipment, toys, sanitary ware
- > Flameproof, hazardous environment Human Interface Devices
- > Proximity detection enables backlighting activation
- > Wake-up from standby applications
- > Replacement for electromechanical switches
- > Find-In-The-Dark (FITD) applications
- > Automotive: Door pocket lighting, electric window control
- > GUI trigger on Proximity detected

Available Options

T _A	DFN-6
-40°C to 85°C	IQS227D



Contents

1	Overview	5
1.1	Device	5
1.2	Applicability	5
1.3	Analogue Functionality	5
2	Packaging and Pin-Out	6
2.1	IQS227D	6
2.1.1	Pin-out	6
2.2	Schematic	7
2.2.1	DFN-6	7
2.3	Recommended Capacitor Values	7
2.4	Exception to recommended capacitor values	8
3	User Configurable Options	9
3.1	Configuring of Devices	9
4	Measuring Capacitance Using the <i>Charge Transfer</i> Method	11
5	Descriptions of User Options	12
5.1	Proximity / Touch Sensor	12
5.2	Logic select for outputs	12
5.3	Output Pin Function	12
5.3.1	Output function: Active	13
5.3.2	Output function: Latch (for t_{LATCH})	13
5.3.3	Output function: Toggle	13
5.4	Proximity Threshold	14
5.5	Touch Threshold	14
5.6	Power Modes	15
5.7	Base Values	15
5.8	ATI Target Counts	16
5.9	Charge Transfer	16
5.10	Filters used by the IQS227D	16
5.10.1	Long Term Average (LTA)	16
5.10.2	IIR Raw Data filter	17
6	Data Streaming Mode	18
6.1	I ² C	18
7	Automatic Tuning Implementation (ATI)	19
7.1	Automatic ATI	19
8	Electrical Specifications	20
8.1	Absolute Maximum Specifications	20
8.2	General Characteristics	20
8.3	Output Characteristics	20
8.4	Packaging Information	21
8.4.1	DFN-6	21
8.4.2	MSL Level	21
9	Datasheet and Part-number Information	22
9.1	Ordering Information	22



9.2	Standard Devices	22
9.3	Device Marking - Top	23
9.3.1	DFN-6 Package Markings	23
9.3.2	Tape and Reel Specification	23
A	Memory Map	24



List of Abbreviations

ATI	Automatic Tuning Implementation
BP	Boost Power Mode
CS	Counts (Number of Charge Transfers)
C _S	Internal Reference Capacitor
DYCAL™	Dynamic Calibration
EMI	Electromagnetic Interference
ESD	Electro-Static Discharge
FTB/EFT	(Electrical) Fast Transient Bursts
GND	Ground
HC	Halt Charge
LP	Low Power Mode
LTA	Long Term Average
THR	Threshold



1 Overview

1.1 Device

The IQS227D is a single channel capacitive proximity and touch controller with an internal voltage regular and reference capacitor (C_S).

The IQS227D device has dedicated pin(s) for the connection of sense electrodes (C_x) and output pins for proximity events on POUT and touch event on TOUT. The output pins can be configured for various output methods including a I²C data streaming option on TOUT and POUT.

Device configuration is determined by One Time Programmable (OTP) options. The device can automatically track slow varying environmental changes via various filters and detect noise. It has an Automatic Tuning Implementation (ATI) to tune the device sense electrode(s). The IQS227D is built on ProxSense® low voltage platform ideal for battery application (down to 2.4 V).

1.2 Applicability

All specifications, except where specifically mentioned otherwise, provided by this datasheet are applicable to the following ranges:

- > Temperature:
 - IQS227D: -40°C to 85°C
- > Supply voltage (V_{DDHI}): 2.4 V to 5 V

1.3 Analogue Functionality

The analogue circuitry measures the capacitance of a sense electrode attached to the C_x pin through a charge transfer process that is periodically initiated by the digital circuitry. The measuring process is referred to a conversion and consists of the discharging of reference capacitor and C_x , the charging of C_x and then a series of charge transfers from C_x to C_s until a trip voltage is reached. The number of charge transfers required to reach the trip voltage is referred to as the Counts (CS). The capacitance measurement circuitry makes use of an internal C_s and voltage reference (VREG). The analogue circuitry further provides functionality for:

- > Power on reset (POR) detection.
- > Reset detection.

2 Packaging and Pin-Out

2.1 IQS227D

The IQS227D is available in a DFN-6 package.

2.1.1 Pin-out

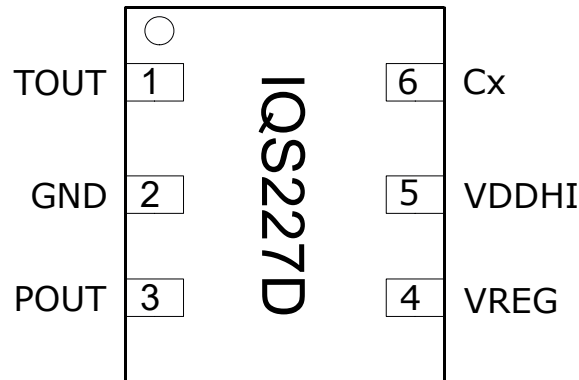


Figure 2.1: IQS227D DFN-6 Pin-out

Table 2.1: DFN-6 Pin-out Description

Pin	Name	Type	Function
1	TOUT	Digital Output	Touch Output
2	GND	Ground	GND Reference
3	POUT	Digital Output	Proximity Output
4	VREG	Analogue Output	Internal Regulator Pin
5	VDDHI	Supply Input	Supply voltage Input
6	Cx	Analogue I/O	Sense Electrode



2.2 Schematic

2.2.1 DFN-6

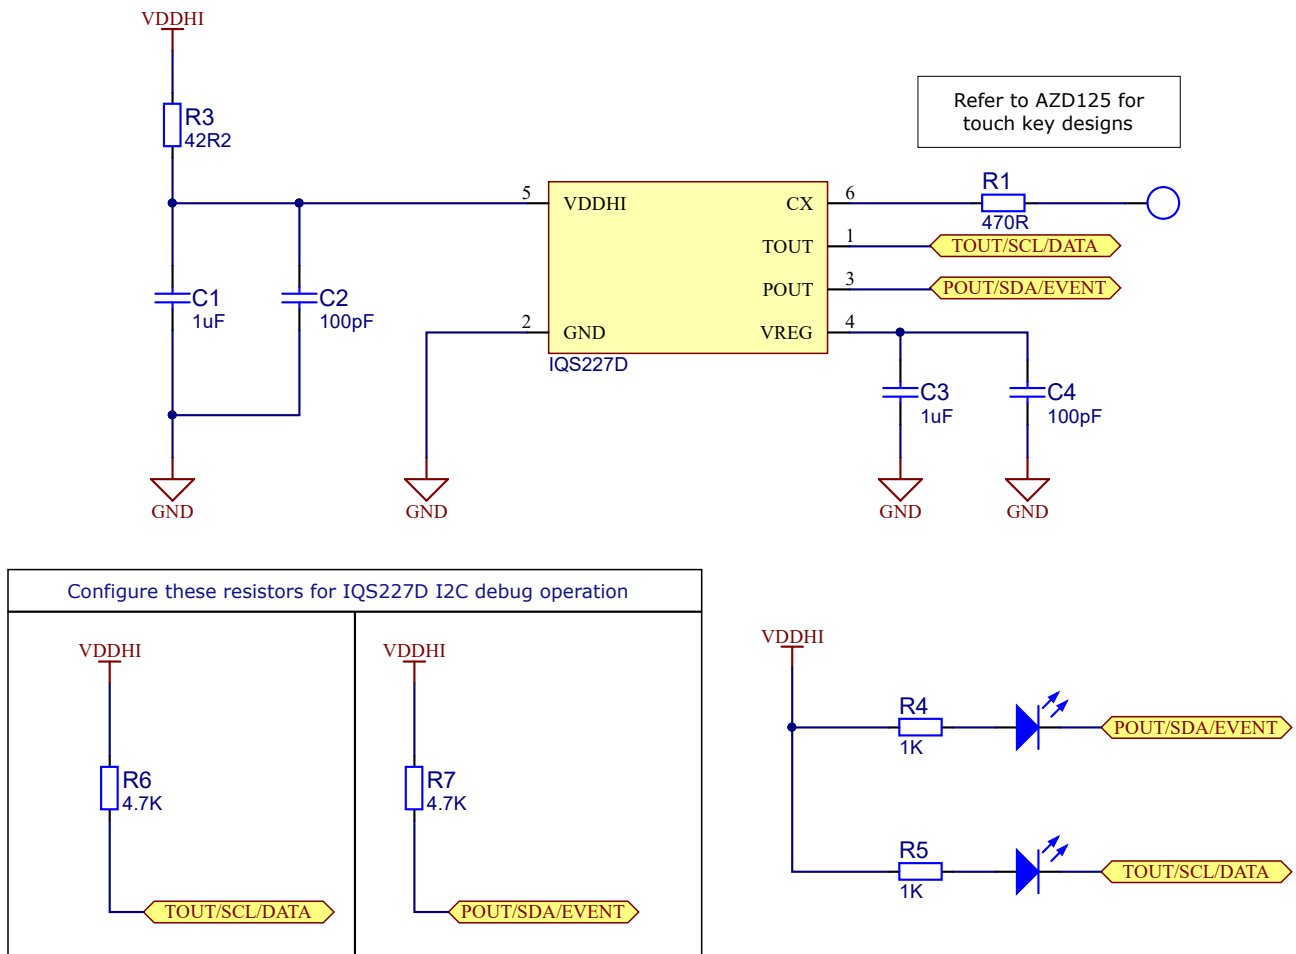


Figure 2.2: Typical application schematic of IQS227D. 100 pF capacitors are optional for added RF immunity. Place all decoupling capacitors (on VDDHI and VREG) as close to the IC as possible.

Where a system level ESD strike is found to cause the IC to go into ESD induced latch-up, it is suggested that the supply current to the IQS227D IC is limited by means of a series resistor that could limit the maximum supply current to the IC to <80 mA.

The 1uF capacitors on VDDHI and VREG are for default power mode. Please see Table 2.3 to select the correct capacitors for low power modes.

The 470 Ω series resistor on the Cx pin is added for ESD protection.

2.3 Recommended Capacitor Values

The 1uF VREG capacitor value is chosen to ensure VREG remains above the maximum BOD specification stated in Table 8.2. The combination of the 1 μ F VREG capacitor and the 1 μ F VDDHI capacitor is chosen to prevent a potential ESD issue. Recommended values to prevent this is shown in Table 2.2.



Table 2.2: VDDHI and VREG capacitor size recommendation to prevent ESD issues with typical hardware combinations

Low Power Scan	8ms(default) - 32ms	64ms	128ms	160ms
Capacitor recommendation	C1 = 1 μ F C3 = 1 μ F	C1 = 4.7 μ F C3 = 2.2 μ F	C1 = 4.7 μ F C3 = 2.2 μ F	C1 = 4.7 μ F C3 = 2.2 μ F

2.4 Exception to recommended capacitor values

In applications where the VDDHI source has high internal resistance or a high resistance path, it will be required to ensure $C3 > C1$ to prevent a VDDHI BOD after the IC sleep cycle (see Table 8.2).

Table 2.3: Capacitor Values for VDDHI and VREG under certain supply voltage condition

Low Power Scan	8ms(default) - 32ms	64ms	128ms	160ms
Capacitor recommendation	C1 = 1 μ F C3 = 1 μ F	C1 = 2.2 μ F C3 = 4.7 μ F	C1 = 4.7 μ F C3 = 10 μ F	C1 = 4.7 μ F C3 = 10 μ F



3 User Configurable Options

The IQS227D provides One Time Programmable (OTP) user options (each option can be modified only once). The device is fully functional in the default state. OTP options are intended for specific applications. The configuration of the device can be done on packaged devices or in-circuit. In-circuit configuration may be limited by values of external components chosen. A number of standard device configurations are available. Azoteq can supply pre-configured devices for large quantities.

3.1 Configuring of Devices

Azoteq offers a Configuration Tool (CT210) and accompanying software (USBProg2.exe) that can be used to program the OTP user options for prototyping purposes.

Alternative programming solutions for the IQS227D also exist. For further enquiries regarding this, please contact Azoteq at ProxSenseSupport@azoteq.com or the local distributor.

Table 3.1: User Selectable Configuration Options: Bank 0 (0xC4H) – IQS227D000000xxDNR

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
T _{Func}	P _{Func}	LOGIC	T _{THR2}	T _{THR1}	T _{THR0}	P _{THR1}	P _{THR0}
Bit 7	T_{Func}: Touch Function						Section 5.3
	0 = Normal						
	1 = Toggle						
Bit 6	P_{Func}: Proximity Function						Section 5.3
	0 = Normal						
	1 = Latch						
Bit 5	LOGIC: I/O's Output logic select						Section 5.2
	0 = Active low						
	1 = Active High						
Bit 4-2	T_{THR}: Touch Threshold						Section 5.5
	000 = 72/256						
	001 = 8/256						
	010 = 24/256						
	011 = 48/256						
	100 = 96/256						
	101 = 128/256						
	110 = 160/256						
	111 = 192/256						
Bit 1-0	P_{THR}: Proximity Threshold Selections						Section 5.4
	00 = 4						
	01 = 2						
	10 = 8						
	11 = 16						



Table 3.2: User Selectable Configuration Options: Bank 1 Full ATI (0xC5H) – IQS227D0000xx00DNR

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
t _{HALT1}	t _{HALT0}	~	~	~	BASE ₂	BASE ₁	BASE ₀

Bit 7-6	t_{HALT}: Halt times 00 = 20 seconds 01 = 40 seconds 10 = Never 11 = Always (Prox on 40s)	Section 5.10
Bit 5-3	Reserved	
Bit 2-0	BASE: Base Value 000 = 200 001 = 50 010 = 75 011 = 100 100 = 150 101 = 250 110 = 300 111 = 500	Section 5.7

Table 3.3: User Selectable Configuration Options: Bank 2 (0xC6H) – IQS227D00xx0000DNR

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
STREAM	TRANS	COMMS	~	TARGET	~	LP ₁	LP ₀

Bit 7	STREAM: Streaming Method 0 = Standalone 1 = 2-wire (I ² C)	Section 6.1
Bit 6	TRANS: Charge Transfer Frequency 0 = 512 kHz 1 = 250 kHz	Section 5.8
Bit 5	COMMS: Streaming 0 = Disabled 1 = Enabled	Section 6
Bit 4	Reserved	
Bit 3	TARGET: ATI Target Counts 0 = 1024 1 = 512	Section 5.9
Bit 2	Reserved	
Bit 1-0	LP: Low Power Modes 00 = BP (9 ms) 01 = NP (128 ms) 10 = LP1 (256 ms) 11 = LP2 (512 ms)	Section 5.6



4 Measuring Capacitance Using the *Charge Transfer* Method

The charge transfer method of capacitive sensing is employed on the IQS227D. (The charge transfer principle is thoroughly described in the application note: [AZD004 - Azoteq Capacitive Sensing](#)).

A charge cycle is used to take a measurement of the capacitance of the sense electrode (connected to Cx) relative to ground. It consists of a series of pulses charging Cx and discharging Cx to the reference capacitor, at the charge transfer frequency (f_{Cx} - refer to Section 5.9 and 8.2). The number of the pulses required to reach a trip voltage on the reference capacitor is referred to as Count Value (CS) which is the instantaneous capacitive measurement. The Counts (CS) are used to determine if either a physical contact or proximity event occurred (refer to Section 5.10.1), based on the change in Counts (CS) detected. The typical values of CS, without a touch or proximity condition range between 650 and 1150 Counts, although higher and lower counts can be used based on the application requirements. With counts larger than ± 1150 the gain of the system may become too high causing unsteady operation.

The IQS227D schedules a charge cycle every t_{SAMPLE} seconds to ensure regular samples for processing of results. The duration of the charge cycle is defined as t_{CHARGE} (refer to Section 5.6, and varies according to the counts required to reach the trip voltage. Following the charge cycle other activities such as data streaming is completed (if in streaming mode), before the next charge cycle is initiated.

Please note: Attaching a probe to the Cx pin will increase the capacitance of the sense plate and therefore Cs. This may have an immediate influence on the counts (decrease t_{CHARGE}) and cause a proximity or touch event.

After t_{HALT} seconds the system will adjust to accommodate for this change. If the total load on Cx, with the probe attached is still lower than the maximum Cx load the system will continue to function normally after t_{HALT} seconds with the probe attached.

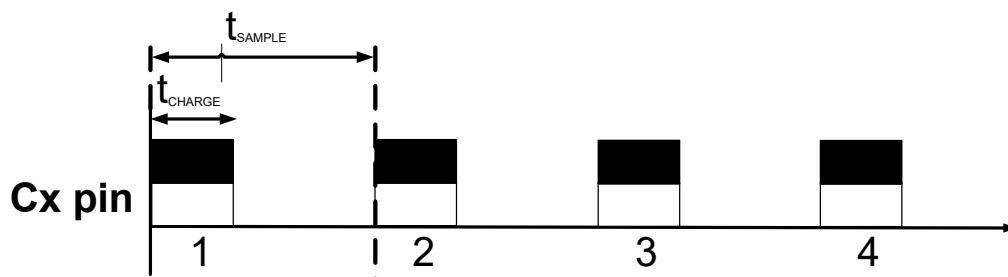


Figure 4.1: Charge cycles as can be seen on Cx.



5 Descriptions of User Options

This section describes the individual user programmable options of the IQS227D in more detail.

User programmable options are programmed to One Time Programmable (OTP) fuse registers (refer to Section 3).

Note:

- > HIGH=Logical '1' and LOW=Logical '0'.
- > The following sections are explained with POUT and TOUT taken as 'Active LOW'.
- > The default is always where bits are set to 0.

Refer to Section 8.3 for the sourcing and sinking capabilities POUT and TOUT. These pins are sourced from VDDHI and will be turned HIGH (when active high) for a minimum time of t_{HIGH} , and LOW for a minimum time of t_{LOW} (when active low).

5.1 Proximity / Touch Sensor

The IQS227D provides a Proximity output on POUT and a Touch output on TOUT, and does not need to be configured.

5.2 Logic select for outputs

The logic used by the device can be selected as active HIGH or active LOW. The output pins, POUT and TOUT, will function based on this selection. The I/O's are push-pull in both directions and does not require a pull-up resistor. When configured as Active High, the I/O's will remain high at POR until ATI has been completed. ATI times will vary based on the capacitive load on the sensor, but typically do not exceed 500 ms.

Configuration: [Bank 0 Bit 5](#)

LOGIC: Output Logic Select

Bit	Selection
0	Active Low
1	Active High

5.3 Output Pin Function

Various options for the function of the output pin(s) are available. These are selected as follows:

Configuration: [Bank 0 Bit 7-6](#)

FUNC1:FUNC0 OUTPUT Pins' functions

Bit	Selection
00	POUT active, TOUT active
01	POUT latch, TOUT active
10	POUT active, TOUT toggle
11	POUT latch, TOUT toggle



5.3.1 Output function: Active

With a Proximity or Touch event, the output pin will change to LOW and stay LOW for as long as the event remains (see Figure 5.1). Also refer to the use of t_{HALT} Section 5.10.1 that may cause the termination of the event.

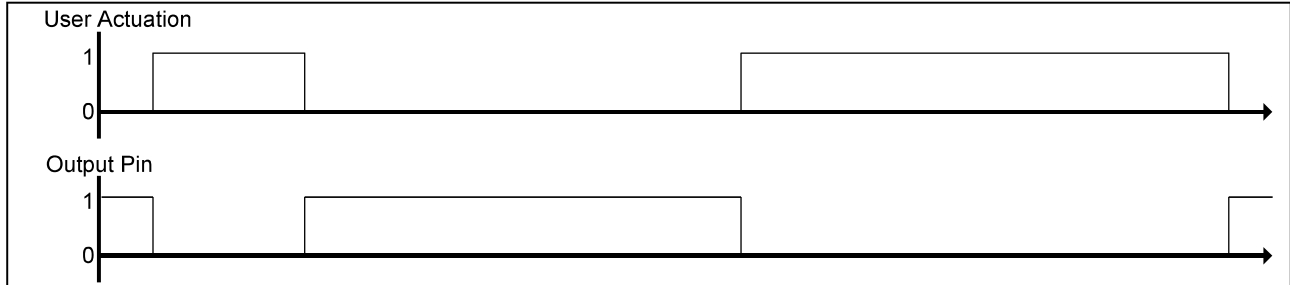


Figure 5.1: Active Mode Output Configuration

5.3.2 Output function: Latch (for t_{LATCH})

With a Proximity or Touch event, the output pin will latch LOW for t_{LATCH} seconds (4 seconds). When the event terminates prior to t_{LATCH} the output pin will remain LOW. When the event remains active longer than t_{LATCH} the output pin will remain LOW as long as the event remains active (see Figure 5.2). When a subsequent event is made before the latch time (4 seconds) has passed, the timer will reset and the output will remain low for another duration of t_{LATCH} seconds (4 seconds). For more details see Figure 5.2.

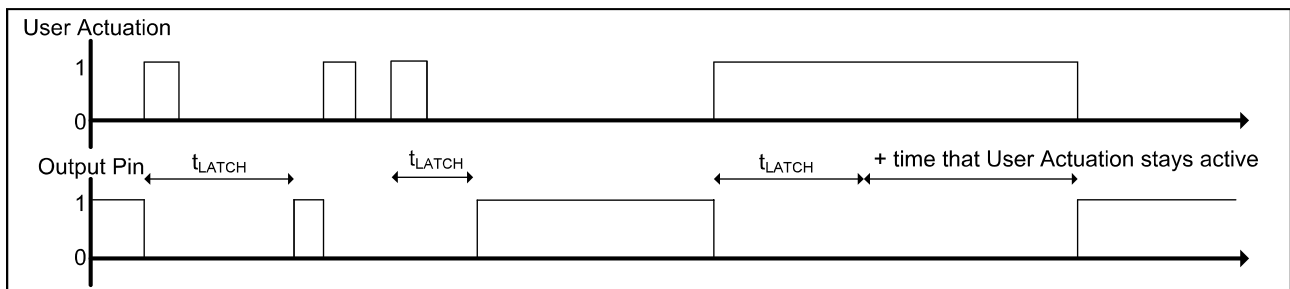


Figure 5.2: Latch Mode Output Configuration

5.3.3 Output function: Toggle

The output pin will toggle with every Proximity or Touch event occurring. Thus, when an event occurs and the output is LOW the output will become HIGH and when the output is HIGH the output will become LOW (see Figure 5.3)

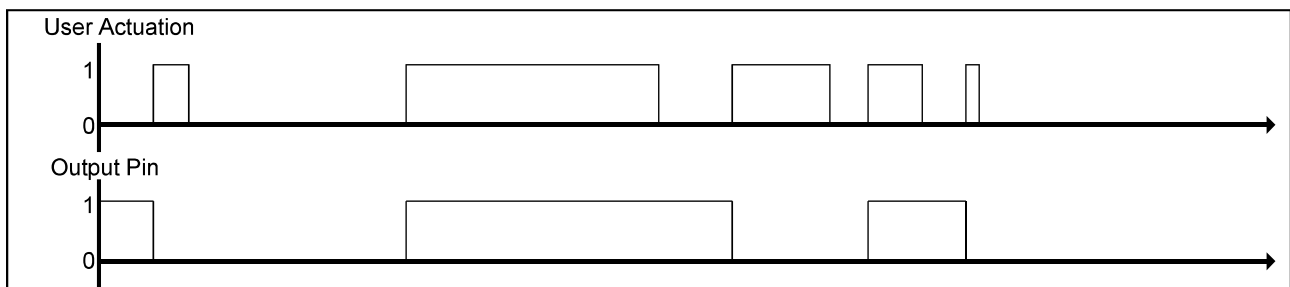


Figure 5.3: Toggle Mode Output Configuration



5.4 Proximity Threshold

The IQS227D has 4 proximity threshold settings. The proximity threshold is selected by the designer to obtain the desired sensitivity and noise immunity. The proximity event is triggered based on the selected proximity threshold; the Counts (CS) and the LTA (Long Term Average). The threshold is expressed in terms of counts; the same as CS (refer to Section 4). A proximity event is identified when for at least 6 consecutive samples the following equation holds:

$$P_{THR} = < LTA - CS \quad (1)$$

Where LTA is the Long Term Average (refer to Section 5.10.1)

Configuration: Bank 0 Bit 1-0

P _{THR1} :P _{THR0} OUTPUT Pins' functions		
Bit	Selection	
00	4	
01	2 (Most sensitive)	
10	8	
11	16 (Least sensitive)	

5.5 Touch Threshold

The IQS227D has 8 touch threshold settings. The touch threshold is selected by the designer to obtain the desired touch sensitivity. The touch threshold is expressed as a fraction of the LTA as follows:

$$T_{THR} = \frac{x}{256} * LTA \quad (2)$$

The touch event is triggered based on T_{TH}, Counts (CS) and LTA. A touch event is identified when for at least 3 consecutive samples the following equation holds:

$$T_{THR} = < LTA - CS \quad (3)$$

With lower average counts (therefore lower LTA) values the touch threshold will be lower and vice versa.



Configuration: *Bank 0 Bit 4-2*

T _{THR2} :T _{THR0} : Touch Thresholds		
Bit	Selection	
000	72/256	
001	8/256	(Most sensitive)
010	24/256	
011	48/256	
100	96/256	
101	128/256	
110	160/256	
111	192/256	(Least sensitive)

5.6 Power Modes

The IQS227D has four power modes specifically designed to reduce current consumption for battery applications. The power modes are basically implemented around the occurrence of charge cycle every t_{SAMPLE} seconds (refer to Table 5.1). The fewer charge transfer cycles that need to occur per second the lower the power consumption (but decreased response time). During Boost Power Mode (BP), charge cycles are initiated approximately every 9 ms. While in any power mode the device will zoom to BP whenever an existing count sample (CS) indicates a possible proximity or touch event. The device will remain in BP for t_{ZOOM} seconds and then return to the selected power mode. The Zoom function allows reliable detection of events with counts being produced at the BP rate.

Table 5.1: Power Mode configuration: Bank 2 bit 1-0

Bit	Power Mode Timing	$t_{\text{SAMPLE}}(\text{ms})$
00	t_{BP} (default)	BP (9 ms)
01	t_{NP}	128
10	t_{LP1}	256
11	t_{LP2}	512

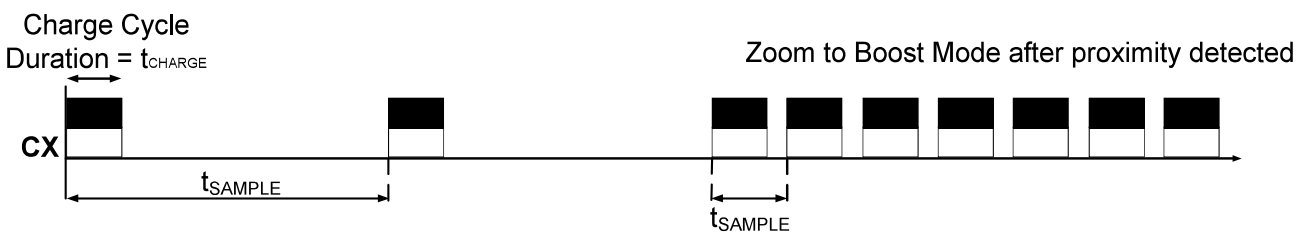


Figure 5.4: Active Mode Output Configuration

5.7 Base Values

The sensitivity of the IQS227D can be changed by adjusting the target and base values of the ATI algorithm, and as a result changing the compensation required to reach the set target. See Section 3.1 for the OTP selectable options of BASE (Table 3.2).

$$\text{sensitivity} = \frac{\text{TARGET}}{\text{BASE}} \quad (4)$$



Configuration: [Bank 1](#) [Bit 2-0](#)

BASE : Base Value Select

Bit	Selection
-----	-----------

000	200
-----	-----

001	50
-----	----

010	75
-----	----

011	100
-----	-----

100	150
-----	-----

101	250
-----	-----

110	300
-----	-----

111	500
-----	-----

5.8 ATI Target Counts

The target of the ATI algorithm can be adjusted between 1024 (default) and 512 counts. When less sensitivity is required, the lower counts will also increase response rate. See Section [3.1](#) for the OTP selectable options of TARGET (Table [3.3](#)).

Configuration: [Bank 2](#) [Bit 3](#)

TARGET : ATI Target Counts

Bit	Selection
-----	-----------

0	1024
---	------

1	512
---	-----

5.9 Charge Transfer

The charge transfer frequency of the IQS227D is adjustable. Changing the transfer frequency will affect sensitivity and response rate. Two options are available:

Configuration: [Bank 2](#) [Bit 6](#)

TRANS : Charge Transfer Frequency

Bit	Selection
-----	-----------

0	512 kHz
---	---------

1	250 kHz
---	---------

5.10 Filters used by the IQS227D

The IQS227D devices employ various signal processing functions that includes the execution of various filters as described below.

5.10.1 Long Term Average (LTA)

Capacitive touch devices detect changes in capacitance that are not always related to the intended proximity or touch of a human. This is a result of changes in the environment of the sense plate and other factors. These changes need to be compensated for in various manners in order to reliably detect touch events and especially to detect proximity events. One mechanism the IQS227D employs is the use of a Long Term Averaging filter (IIR type filter) which tracks slow changes in the environment (expressed as changes in the counts). The result of this filter is a Long Term Average (LTA) value that



forms a dynamic reference used for various functions such as identification of proximity and touch events.

The LTA is calculated from the counts (CS). The filter only executes while no proximity or touch event is detected to ensure compensation only for environmental changes. However, there may be instances where sudden changes in the environment or changes in the environment while a proximity or touch event has been detected cause the counts to drift away from the LTA. To compensate for these situations a Halt Timer (t_{HALT}) has been defined. The Halt Timer is started when a proximity or touch event occurs and when it expires the LTA filter is recalibrated. Recalibration causes $\text{LTA} < \text{CS}$, thus the disappearance of proximity or touch events (refer to Sections 5.4 and 5.5). The designer needs to select a Halt Timer value to best accommodate the required application.

Configuration: [Bank 1 Bit 7-6](#)

$t_{\text{HALT1}} : t_{\text{HALT0}}$ OUTPUT Pins' functions	
Bit	Selection
00	20 seconds
01	40 seconds
10	NEVER
11	ALWAYS (Proximity on 40 seconds)

Notes:

- > The “NEVER” option indicates that the execution of the filters will never be halted.
- > With the ‘ALWAYS’ option and the detection of a proximity event the execution of the filter will be halted for only 40 seconds and with the detection of a touch event the execution of the filter will be halted as long as the touch condition applies.

Refer to Application note [AZD004 - Azoteq Capacitive Sensing](#) for detail regarding the execution of the LTA filter.

5.10.2 IIR Raw Data filter

The extreme sensitivity of the IQS227D makes it susceptible to external noise sources. This causes a decreased signal to noise (S/N) ratio, which could potentially cause false event detections. Noise can also couple into the device as a result of poor PCB, sense electrode design and other factors influencing capacitive sensing devices. In order to compensate for noise the IQS227D uses an IIR filter on the raw data to minimize result of noise in the counts. This filter is implemented on all the IQS227D devices, and cannot be disabled.



6 Data Streaming Mode

The IQS227D has the capability to stream data to an MCU. This provides the designer with the capability to obtain the parameters within the device in order to aid design into applications. Data streaming may further be used by an MCU to control events or further process results obtained from the IQS227D devices. Data streaming is performed through I²C communication (SDA on POUT, SCL on TOUT). Data Streaming can be enabled as indicated below:

Configuration: [Bank 2 Bit 7](#)

COMMS: Data Streaming

Bit	Selection
-----	-----------

0	Disabled
1	Enabled

Configuration: [Bank 2 Bit 5](#)

STREAMING: Data Streaming Mode

Bit	Selection
-----	-----------

0	Standalone
1	I ² C

Data streaming is initiated by the IQS227D. When data streaming is enabled data is sent following each charge.

6.1 I²C

The IQS227D also allow for I²C streaming for debugging. Data Streaming can be changed to I²C as shown below:

Configuration: [Bank 2 Bit 7](#)

STREAMING: Data Streaming Mode

Bit	Selection
-----	-----------

0	Standalone
1	I ² C

The Memory Map for the IQS227D can be found in Appendix A. The IQS227D can communicate on an I²C compatible bus structure. Note that 4.7 k Ω pull-up resistors should be placed on SDA and SCL. The Control byte indicates the 7-bit device address (0x44H) and the Read/Write indicator bit.



7 Automatic Tuning Implementation (ATI)

ATI is sophisticated technology implemented in the latest generation ProxSense® devices that optimises the performance of the sensor in a wide range of applications and environmental conditions (refer to application note [AZD004](#)).

ATI makes adjustments through external reference capacitors unnecessary (as required by most other solutions) to obtain optimum performance.

ATI adjusts internal circuitry according to two parameters, the ATI multiplier and the ATI compensation. The ATI multiplier can be viewed as a course adjustment and the ATI compensation as a fine adjustment. The adjustment of the ATI parameters will result in variations in the counts and sensitivity. Sensitivity can be observed as the change in current sample as the result of a fixed change in sensed capacitance. The ATI parameters have been chosen to provide significant overlap. It may therefore be possible to select various combinations of ATI multiplier and ATI compensation settings to obtain the same count value. The sensitivity of the various options may however be different for the same count value.

7.1 Automatic ATI

The IQS227D implements an automatic ATI algorithm. This algorithm automatically adjusts the ATI parameters to optimise the sensing electrodes connection to the device. The device will execute the ATI algorithm whenever the device starts-up and when the counts are not within a predetermined range. While the Automatic ATI algorithm is in progress this condition will be indicated in the streaming data and proximity and touch events cannot be detected. The device will only briefly remain in this condition, and it will be entered only when relatively large shifts in the counts has been detected. The automatic ATI function aims to maintain a constant count value, regardless of the capacitance of the sense electrode (within the maximum range of the device). The effects of auto-ATI on the application are the following:

- > Automatic adjustment of the device configuration and processing parameters for a wide range of PCB and application designs to maintain an optimal configuration for proximity and touch detection.
- > Automatic tuning of the sense electrode at start-up to optimise the sensitivity of the application.
- > Automatic re-tuning when the device detects changes in the sensing electrodes capacitance to accommodate a large range of changes in the environment of the application that influences the sensing electrode.
- > Re-tuning only occurs during device operation when a relatively large sensitivity reduction is detected. This is to ensure smooth operation of the device during operation.
- > Re-tuning may temporarily influence the normal functioning of the device, but in most instances the effect will be hardly noticeable.
- > Shortly after the completion of the re-tuning process the sensitivity of a Proximity detection may be reduced slightly for a few seconds as internal filters stabilises.

Automatic ATI can be implemented so effectively due to:

- > Excellent system signal to noise ratio (SNR).
- > Effective digital signal processing to remove AC and other noise.
- > The very stable core of the devices.
- > Built in capability to accommodate a large range of sensing electrode capacitances.



8 Electrical Specifications

8.1 Absolute Maximum Specifications

Exceeding these maximum specifications may cause damage to the device

Operating temperature:	-40°C to 85°C
Supply Voltage ($V_{DDHI}-V_{SS}$)	5.5V
Maximum pin Voltage (T_{OUT} , P_{OUT})	$V_{DDHI} + 0.3V$
Minimum pin voltage (V_{DDHI} , V_{REG} , T_{OUT} , P_{OUT} , C_X)	$V_{SS} - 0.3V$
Minimum power-on slope	100V/s
ESD protection (V_{DDHI} , V_{REG} , V_{SS} , T_{OUT} , P_{OUT} , C_X)	8kV

8.2 General Characteristics

IQS227D devices are rated for supply voltages between 2.4 V and 5 V.

Table 8.1: IQS227D General Operating Conditions

Description	Conditions	Parameter	Min	Typ	Max	Unit
Supply voltage		V_{DDHI}	2.4	~	5	V
Internal regulator output	$2.4 \leq V_{DDHI} \leq 5.0$	V_{REG}	1.98	~	2.08	V
Boost operating current	$2.4 \leq V_{DDHI} \leq 5.0$	$I_{IQS227D_BP}$	~	101	~	μA
Normal operating current	$2.4 \leq V_{DDHI} \leq 5.0$	$I_{IQS227D_NP}$	~	6	~	μA
Low Power 1 operating current	$2.4 \leq V_{DDHI} \leq 5.0$	$I_{IQS227D_LP1}$	~	4.5	~	μA
Low Power 2 operating current	$2.4 \leq V_{DDHI} \leq 5.0$	$I_{IQS227D_LP2}$	~	<3.2	~	μA
Charge transfer frequency range	$2.4 \leq V_{DDHI} \leq 5.0$	$f_{Cx} = 512/250$	-8%	f_{Cx}	+8%	kHz

Charge Transfer Timings for low power modes are found in section 5.6.

Table 8.2: Start-up and shut-down slope Characteristics

Description	Parameter	Min	Max	Unit
Reset release voltage on V_{DDHI} rising edge	V_{DDHI} Reset Rising Edge (POR)	~	2.1	V
Reset trigger voltage on V_{DDHI} falling edge	V_{DDHI} Reset Falling Edge (BOD)	0.3	~	V
Reset release voltage on V_{REG} rising edge	V_{REG} Reset Rising Edge (POR)	~	1.8	V
Reset trigger voltage on V_{REG} falling edge	V_{REG} Reset Falling Edge (BOD)	0.3	~	V

8.3 Output Characteristics

Table 8.3: Digital I/O Characteristics

Parameter	Test Conditions	Min	Typ	Max	Unit
V_{OL}	T_{OUT} and P_{OUT} Output low voltage $I_{sink} = 10\text{ mA}$	~	~	0.3	V
V_{OH}	Output high voltage $I_{source} = 5\text{ mA}$	$VDD - 0.3$	~	~	V
V_{IL}	Input low voltage	~	~	$0.3 \times VDD$	V
V_{IH}	Input high voltage	$0.7 \times VDD$	~	~	V

8.4 Packaging Information

8.4.1 DFN-6

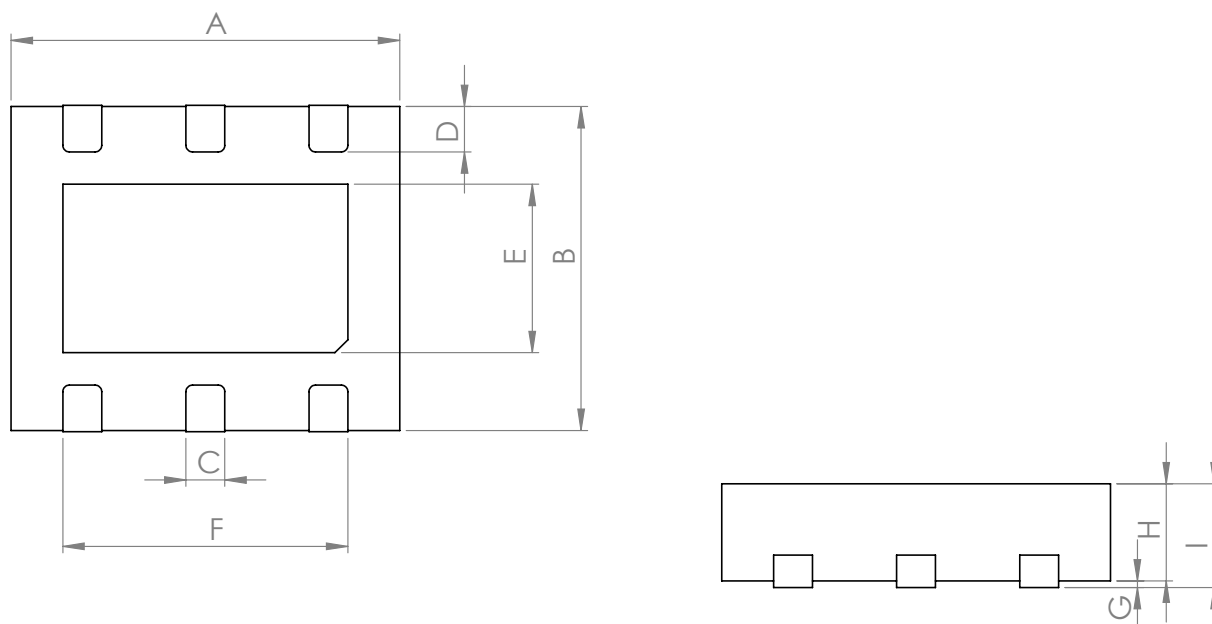


Figure 8.1: DFN-6 Packaging

Table 8.4: DFN-6 Dimensions

Dimension	Min (mm)	Max (mm)
A	3.00	3.00
B	2.50	2.50
C	0.30	0.30
D	0.35	0.35
E	1.30	1.30
F	2.20	2.20
G	0.05	0.05
H	0.75	0.75
I	0.80	0.80

8.4.2 MSL Level

Moisture Sensitivity Level (MSL) relates to the packaging and handling precautions for some semiconductors. The MSL is an electronic standard for the time period in which a moisture sensitive device can be exposed to ambient room conditions (approximately 30°C/85% RH see J-STD003C for more information) before reflow occurs.

Package	Level (duration)
DFN-6	MSL 1 (Unlimited at $\leq 30^{\circ}\text{C}/85\% \text{ RH}$) Reflow profile peak temperature $< 260^{\circ}\text{C}$ for < 30 seconds




9 Datasheet and Part-number Information

9.1 Ordering Information

Contact the official distributor for sample quantities. A list of the distributors can be found under the "Distributors" section of www.azoteq.com. Special MOQs apply for custom configurations.

The Part-number can be generated by using USBProg2.exe.

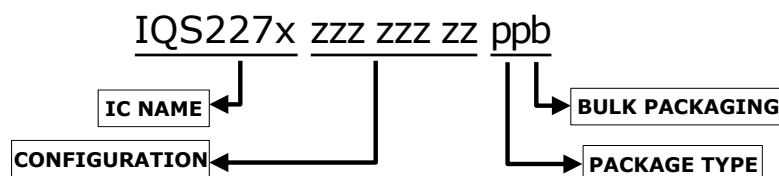

IC NAME	IQS227D	=	Self Capacitive IC with Dual Outputs
CONFIGURATION	zzz zzz zz	=	IC Configuration (hexadecimal)
PACKAGE TYPE	DN	=	DFN-6 package
BULK Packaging	R	=	Reel (6000pcs/reel) – MOQ = 6000pcs MOQ = 1 reel. (Orders shipped as full reels)

9.2 Standard Devices

The default (unconfigured) device will be suitable for most applications. Some popular configurations are kept in stock and do not require further programming. (Ordering codes given for Device IDs: 03 0D / 03 0E or later (the Device ID will be read in USBProg2.exe)).

Table 9.1: IQS127D Standard Replacements

Device	Function
IQS227D-00400008DNR	Default
IQS227D-00400028DNR	Active HIGH outputs
IQS227D-00410008DNR	Normal Power Mode
IQS227D-00400088DNR	Touch Output ac Toggle

9.3 Device Marking - Top

9.3.1 DFN-6 Package Markings

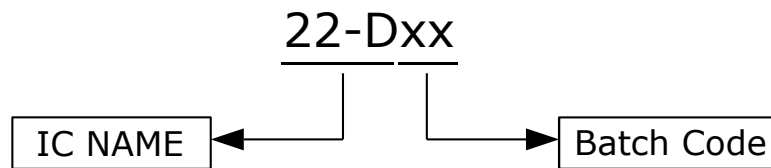


Figure 9.1: Top Marking of IQS227D

IC NAME 22-D = IQS227D Self Capacitive

Batch Code xx = AA to ZZ

9.3.2 Tape and Reel Specification

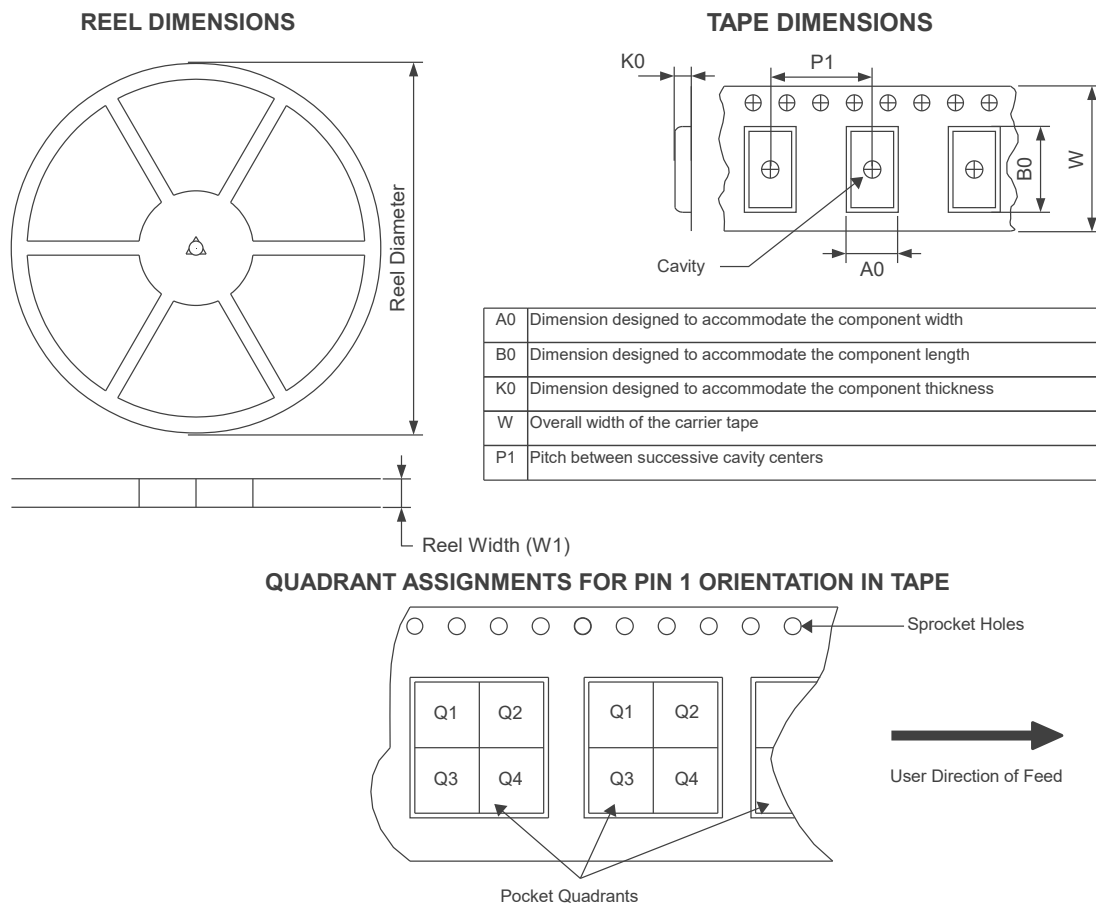


Figure 9.2: DFN-6 Tape Specification

Table 9.2: Tape and Reel Dimensions

Device	Package Type	Package Drawing	Pins	QTY per reel	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
IQS227DzzzzzzzzDNR	DFN6	DFN-6	6	6000	330	12	2.8	3.3	1.2	4	12	Q1



A Memory Map

Device Information

00H	Product Number (PROD_NR)								
	Bit	7	6	5	4	3	2	1	0
	Access	39 (Decimal)							
	R	Note							

01H	Software Number (SW_NR)								
	Bit	7	6	5	4	3	2	1	0
Access	Value	28 (Decimal)							
R	Note								

[00H] PROD_NR

The product number for the IQS227D is 39 (Decimal).

[01H] SW_NR

The software version number of the device ROM can be read in this byte. The latest software version is 28 (Decimal).

10H		System Flags (Sys_Flags)								
		Bit	7	6	5	4	3	2	1	0
Access		Value	~	~	Logic	Halt	LP	ATI	~	Zoom
R		Note								

[10H] SYSFLAGS0

- Bit 7-6:** **Reserved**
- Bit 5:** **Logic:** Logic Output Indication.
0 = Active Low
1 = Active High
- Bit 4:** **Halt:** Indicates Filter Halt Status.
0 = LTA not being Halted
1 = LTA Halted
- Bit 3:** **LP:** Low Power Mode
0 = Sample time BP



1 = Sample time LP

Bit 2: **ATI:** Status of automated ATI routine.

0 = ATI is not busy

1 = ATI in progress

Bit 1: **Reserved**

Bit 0: **Zoom:** Zoom will indicate full-speed charging once an undebounced proximity is detected. In BP mode, this will not change the charging frequency.

0 = IC not zoomed in

1 = IC detected undebounced proximity and IC is charging at full speed (BP)

31H

Status

Bit	7	6	5	4	3	2	1	0
Access	~	~	~	~	~	~	Touch	Prox
R	Note							

[31H] Status

Bit 7-2: **Reserved**

Bit 1: **Touch:** Touch Detection.

0 = Not Active

1 = Active

Bit 0: **Prox:** Proximity Detection.

0 = Not Active

1 = Active

42H

Counts_High (CS_H)

Bit	7	6	5	4	3	2	1	0
Access	Counts High Byte							
R	Note							



43H

Counts_Low (CS_L)

Bit	7	6	5	4	3	2	1	0
Access	Counts Low Byte							
R	Note							

83H

LTA_High (LTA_H)

Bit	7	6	5	4	3	2	1	0
Access	Long Term Average High Byte							
R	Note							

84H

LTA_Low (LTA_L)

Bit	7	6	5	4	3	2	1	0
Access	Long Term Average Low Byte							
R	Note							

C4H

Fuse Bank 0 (FB_0)

Bit	7	6	5	4	3	2	1	0
Access	See Table 3.1 for more details							
R	Note							

C5H

Fuse Bank 1 (FB_1)

Bit	7	6	5	4	3	2	1	0
Access	See Table 3.2 for more details							
R	Note							

C6H

Fuse Bank 2 (FB_2)

Bit	7	6	5	4	3	2	1	0
Access	See Table 3.3 for more details							
R	Note							

C7H

Fuse Bank 3 (FB_3)

Bit	7	6	5	4	3	2	1	0
Access	Not Used							
R	Note							



C8H		DEFAULT_COMMS_POINTER							
Access	Bit	7	6	5	4	3	2	1	0
	Value	(Beginning of Device Specific Data)							
	Default	10H							

[C8H] Default Comms Pointer

The value stored in this register will be loaded into the Comms Pointer at the start of a communication window. For example, if the design only requires the Proximity Status information each cycle, then the Default Comms Pointer can be set to **ADDRESS 31H**. This would mean that at the start of each communication window, the comms pointer would already be set to the Proximity Status register, simply allowing a **READ** to retrieve the data, without the need of setting up the address.



Contact Information

	USA	Asia	South Africa
Physical Address	11940 Jollyville Suite 120-S Austin TX 78759 USA	Room 501A, Block A T-Share International Centre Taoyuan Road, Nanshan District Shenzhen, Guangdong, PRC	1 Bergsig Avenue Paarl 7646 South Africa
Postal Address	11940 Jollyville Suite 120-S Austin TX 78759 USA	Room 501A, Block A T-Share International Centre Taoyuan Road, Nanshan District Shenzhen, Guangdong, PRC	PO Box 3534 Paarl 7620 South Africa
Tel	+1 512 538 1995	+86 755 8303 5294 ext 808	+27 21 863 0033
Email	info@azoteq.com	info@azoteq.com	info@azoteq.com

*Visit www.azoteq.com
for a list of distributors and worldwide representation.*

Patents as listed on www.azoteq.com/patents-trademarks/ may relate to the device or usage of the device.

Azoteq®, Crystal Driver®, IQ Switch®, ProxSense®, ProxFusion®, LightSense™, SwipeSwitch™, and the  logo are trademarks of Azoteq.

The information in this Datasheet is believed to be accurate at the time of publication. Azoteq uses reasonable effort to maintain the information up-to-date and accurate, but does not warrant the accuracy, completeness or reliability of the information contained herein. All content and information are provided on an "as is" basis only, without any representations or warranties, express or implied, of any kind, including representations about the suitability of these products or information for any purpose. Azoteq disclaims all warranties and conditions with regard to these products and information, including but not limited to all implied warranties and conditions of merchantability, fitness for a particular purpose, title and non-infringement of any third party intellectual property rights. Azoteq assumes no liability for any damages or injury arising from any use of the information or the product or caused by, without limitation, failure of performance, error, omission, interruption, defect, delay in operation or transmission, even if Azoteq has been advised of the possibility of such damages. The applications mentioned herein are used solely for the purpose of illustration and Azoteq makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Azoteq products are not authorized for use as critical components in life support devices or systems. No licenses to patents are granted, implicitly, express or implied, by estoppel or otherwise, under any intellectual property rights. In the event that any of the abovementioned limitations or exclusions does not apply, it is agreed that Azoteq's total liability for all losses, damages and causes of action (in contract, tort (including without limitation, negligence) or otherwise) will not exceed the amount already paid by the customer for the products. Azoteq reserves the right to alter its products, to make corrections, deletions, modifications, enhancements, improvements and other changes to the content and information, its products, programs and services at any time or to move or discontinue any contents, products, programs or services without prior notification. For the most up-to-date information and binding Terms and Conditions please refer to www.azoteq.com.