

ISSUE 1; January 2016

Description

- The IQXO-944 is a very high performance device delivering ultra low RMS phase jitter for high speed serial data applications in telecom, networking and communication equipment.
- Applications:
 - Base stations
 - Ethernet
 - DSL/ADSL
 - WiMAX/W-LAN
 - Communications
 - Wi-Fi
 - Consumer
- Features:
 - Ultra Low Jitter 0.05 to 0.3 ps integrated 12kHz to 20MHz
 - Excellent temperature stability
 - CMOS, LVPECL, LVDS, or HCSL output options
 - Wide frequency range

Frequency Parameters

- Frequency 1.0MHz to 640.0MHz
- Frequency Stability $\pm 10.00\text{ppm}$ to $\pm 20.00\text{ppm}$
- Frequency Stability (including tolerance, temperature range, supply voltage variation, load variation and 10 years ageing at 25°C)

Electrical Parameters

- Supply Voltage Options:
 - 2.5V $\pm 5\%$
 - 3.3V $\pm 10\%$
- Supply Current:
 - CMOS 1 to 40mA
 - LVPECL 40 to 120mA
 - LVDS 30 to 80mA


Operating Temperature Ranges

- -40 to 85°C


Output Details

- Output Compatibility CMOS/LVPECL/LVDS
- Output Characteristics (CMOS up to 200MHz):
 - Load: 15pF
 - Output Low (Vol): 10%Vs max
 - Output High (Voh): 90%Vs min
 - Duty Cycle @ 50% Vs: 45/55% max
 - R/F Time (@ 90%/10%): 3ns max
 - Phase Jitter (12kHz-20MHz): 0.05 to 0.3ps rms max
- Output Characteristics (LVPECL):
 - Load: 50Ω
 - Output Low (Vol): Vs-1.6V max
 - Output High (Voh): Vs-1.03V min
 - Duty Cycle (@ Vs-1.3V): 45/55% max
 - R/F Time (@ 80%/20%): 0.6ns max
 - Phase Jitter (12kHz-20MHz): 0.05 to 0.3ps rms max
- Output Characteristics (LVDS):
 - Load: 100Ω
 - Differential Output Voltage: 350mV
 - Duty Cycle (@ 1.25V): 45/55%
 - R/F Time: 0.6ns max
 - Phase Jitter (12kHz-20MHz): 0.05 to 0.3ps rms max


Outline (mm) 1.5mm package height

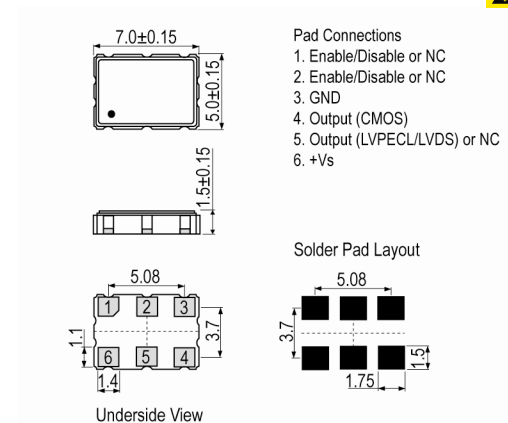

Outline (mm) 1.6mm package height

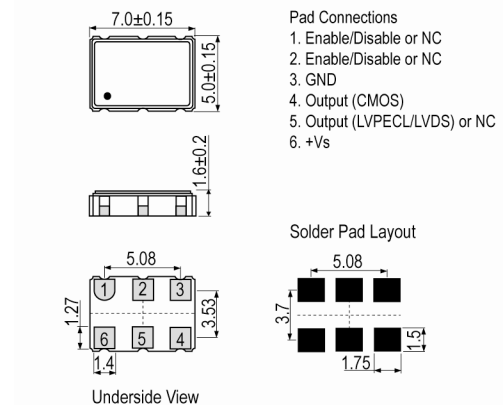

Outline (mm) = 1.75mm package height

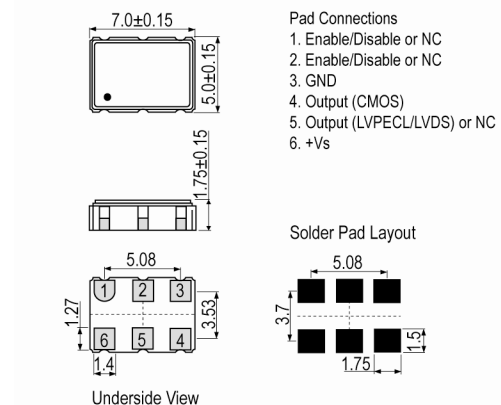

Sales Office Contact Details:

UK: +44 (0)1460 270200

France: 0800 901 383

Email: info@iqdfrequencyproducts.com

Germany: 0800 1808 443

USA: +1.760.318.2824

Web: www.iqdfrequencyproducts.com

Output Control

- Enable/Disable:
 Logic '1' (70%Vs min) to pad 1 or no connection enables oscillator output
 Logic '0' (30%Vs max) to pad 1 disables oscillator output

Environmental Parameters

- Shock: MIL-STD-883, Method 2002
- Storage Temperature Range: -55 to 125°C
- Humidity: after 48 hours at 85 °C ±2 °C 85 % relative humidity non-condensing
- Thermal Shock: MIL-STD-883, Method 1011
- Vibration: MIL-STD-883, Method 2007

Ordering Information

- *minimum information required
 Frequency*
 Model*
 Output Type*
 Pad 1 or 2 function*
 Supply Voltage*
 Frequency Stability*
 Operating Temperature Range*


Compliance

- RoHS Status (2011/65/EU) Compliant
- REACh Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Bulk Loose in bulk pack
 Pack Size: 1
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
 Pack Size: 2,000

Pb-Free Reflow

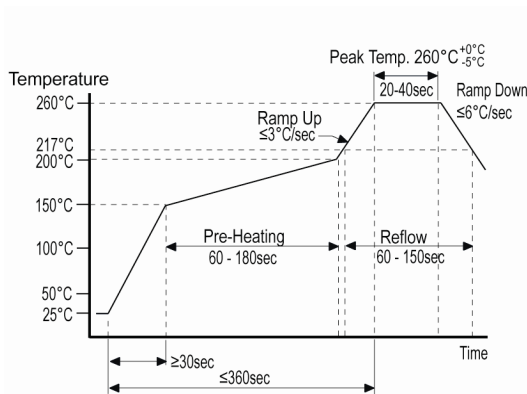

Sales Office Contact Details:

UK: +44 (0)1460 270200
 Germany: 0800 1808 443

France: 0800 901 383
 USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com

Electrical Specification - maximum limiting values

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	640.0MHz	-40 to 85	-	-	-	-

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com