

ISSUE 1; August 2016

Description

- Surface mount Voltage Controlled Temperature Compensated Crystal Oscillator (VCTCXO) in a miniature 1.6 x 1.2mm surface mount package.

Frequency Parameters

- Frequency 19.2MHz to 52.0MHz
- Frequency Tolerance $\pm 1.50\text{ppm}$
- Tolerance Condition @ 25°C $\pm 2^\circ\text{C}$
- Frequency Stability $\pm 0.50\text{ppm}$
- Ageing $\pm 1\text{ppm max per year @ } 25^\circ\text{C} \pm 3^\circ\text{C}$
- Supply Voltage Variation ($\pm 5\%$ change @ 25°C): $\pm 0.1\text{ppm max}$
- Load Variation ($\pm 10\%$ change @ 25°C): $\pm 0.1\text{ppm max}$
- IR Reflow Resistance (referred to frequency before reflow): $\pm 1\text{ppm max}$

Electrical Parameters

- Supply Voltage 1.8V $\pm 5\%$
- Absolute Maximum Supply Voltage: -0.6V to 4.6V

Frequency Adjustment

- Pulling $\pm 8\text{ppm to } \pm 13\text{ppm}$
- Control Voltage 0.9V $\pm 0.8\text{V}$
- Absolute Maximum Control Voltage: -0.6V to Vs+0.6V
- Slope: Positive

Operating Temperature Ranges

- 40 to 85°C
- 30 to 85°C

Output Details

- Output Compatibility Clipped Sine
- Drive Capability 10k Ω //10pF
- Output Voltage Level: 0.8V pk-pk min
- Output: DC coupled
- Start Up Time (Vout $\geq 90\%$ Vpk-pk): 2ms max

Noise Parameters

- Harmonic distortion: -5.0dBc max
- Phase Noise @ 25°C: -135dBc/Hz @ 1kHz typ


Environmental Parameters

- Storage Temperature Range: -40 to 85°C

Manufacturing Details

- Reflow Process
 Preheating: 170°C $\pm 10^\circ\text{C}$ for 1 to 2 minutes.
 Maximum reflow: 250°C $\pm 10^\circ\text{C}$ for 10secs.
- A DC-cut capacitor is not built in to the oscillator; a 1000pF DC-cut capacitor is therefore required in the output line.

Outline (mm)

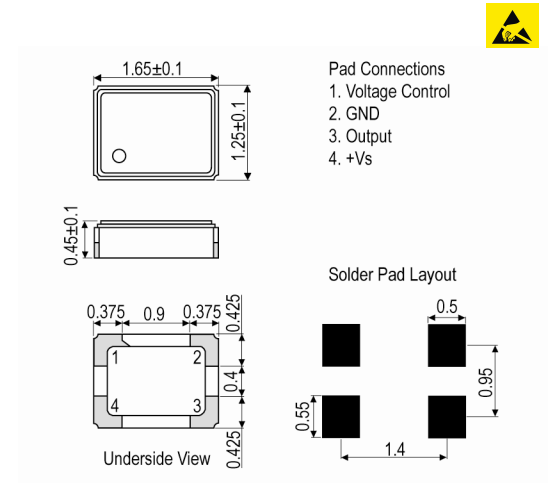

Sales Office Contact Details:

UK: +44 (0)1460 270200
 Germany: 0800 1808 443

France: 0800 901 383
 USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com

Ordering Information

- *Minimum information required
 - Frequency*
 - Model*
 - Supply Voltage
 - Frequency Stability*
 - Operating Temperature Range*
 - Pulling
- Example:
 - 19.2MHz IQXT-351
 - ±0.5ppm -30 to 85C 1.8V ±8ppm to ±13ppm

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACh Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Cutt Cut tape
 - Pack Size: 1
- Pack Style: Reel Tape and reel in accordance with
 - Pack Size: 2,000 EIA-481-D

Electrical Specification - maximum limiting values 1.80V ±5%

Frequency	Temperature Range	Stability	Current Draw	Rise and Fall Time	Duty Cycle
	°C	ppm	mA	ns	%
19.2MHz	-30 to 85	±0.50	1.5	-	-
26.0MHz	-40 to 85	±0.50	1.5	-	-
38.4MHz	-30 to 85	±0.50	1.7	-	-
52.0MHz	-40 to 85	±0.50	1.7	-	-

This document was correct at the time of printing; please contact your local sales office for the latest version.
[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com