



1.9mm Round Subminiature “Z-Bend” Lead Infrared LED

MODEL NO : IR91-21C/F10

■ Features :

- Small double-end package
- Peak wavelength $\lambda_p=940\text{nm}$
- View angle 25°
- High reliability
- Low forward voltage

■ Description :

- IR91-21C/F10 is an infrared emitting diode in miniature SMD package witch is in a water clear plastic with spherical top view lens. The spectrally device is matched silicon with photodiode and phototransistor.

■ Applications :

- PCB mounted infrared sensor
- Floppy disk drive
- Smoke detector
- Optoelectronic switch
- Video

PART NO.	CHIP	LENS COLOR
	MATERIAL	
IR	GaAlAs	Water Clear



1.9mm Round Subminiature “Z-Bend” Lead Infrared LED

MODEL NO : IR91-21C/F10

■ Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit	Notice
Continuous Forward Current	I_F	65	mA	
Peak Forward Current Pulse width=100 μ s, Duty cycle=1%	I_{FP}	1.0	A	
Reverse Voltage	V_R	5	V	
Operating Temperature	Topr	-40 ~ +85	$^\circ\text{C}$	
Storage Temperature	Tstg	-40 ~ +85	$^\circ\text{C}$	
Soldering Temperature	Tsol	260	$^\circ\text{C}$	
Power Dissipation at(or below) 25 $^\circ\text{C}$ Free Air Temperature	Pd	130	mW	





■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Radiant Intensity	E_e	3.0	5.0	----	mW/sr	$I_F=20\text{mA}$
		----	25	----		$I_F=100\text{mA}, t_p=100 \mu\text{s}, t_p/T=0.01$
		----	250	----		$I_F=1\text{A}, t_p=100 \mu\text{s}, t_p/T=0.01$
Peak Wavelength	λ_p	----	940	----	nm	$I_F=20\text{mA}$
Spectral Bandwidth	$\Delta \lambda$	----	45	----	nm	$I_F=20\text{mA}$
Forward Voltage	V_F	----	1.2	1.5	V	$I_F=20\text{mA}$
		----	1.4	1.85		$I_F=100\text{mA}, t_p=100 \mu\text{s}, t_p/T=0.01$
		----	2.6	4.0		$I_F=1\text{A}, t_p=100 \mu\text{s}, t_p/T=0.01$
Reverse Current	I_R	----	----	10	μA	$V_R=5\text{V}$
View Angle	$2\theta_{1/2}$	----	25	----	deg	$I_F=20\text{mA}$

1.9mm Round Subminiature “Z-Bend” Lead Infrared LED

MODEL NO : IR91-21C/F10

■ Typical Electrical/Optical/Characteristics Curves

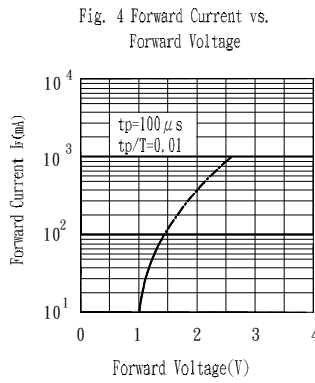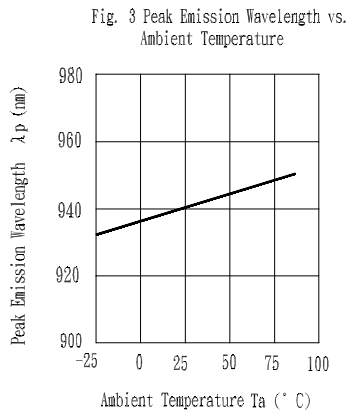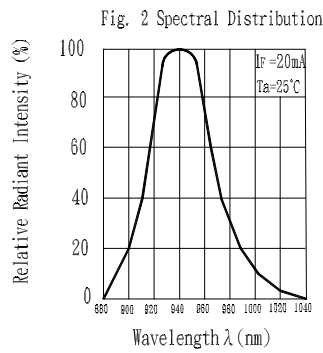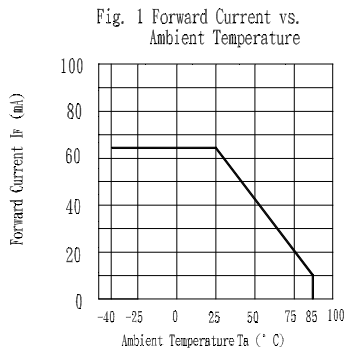

1.9mm Round Subminiature “Z-Bend” Lead Infrared LED

MODEL NO : IR91-21C/F10

■ Typical Electrical/Optical/Characteristics Curves

Fig. 5 Relative Intensity vs. Forward Current

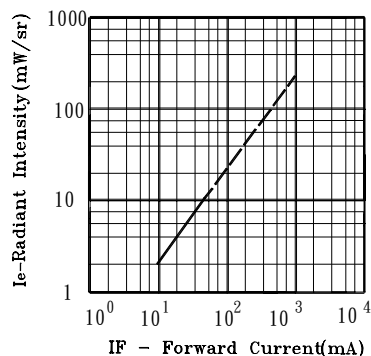


Fig. 6 Relative Radiant Intensity vs. Angular Displacement

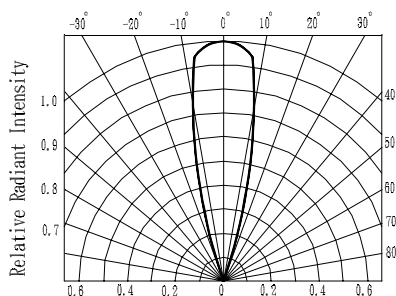


Fig. 7 Relative Intensity vs. Ambient Temperature (°C)


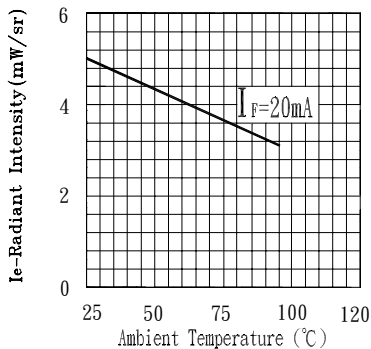


Fig. 8 Forward Current vs. Ambient Temperature (°C)

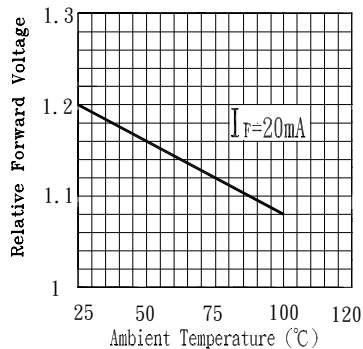

1.9mm Round Subminiature “Z-Bend” Lead Infrared LED



MODEL NO : IR91-21C/F10

■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycles	Sample Size	Failure Judgement Criteria	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 secs	22 pcs		0/1
2	Temperature Cycle	H : +85°C 30 mins  L : -55°C 30 mins	50 cycles	22 pcs	$I_R \geq U \times 2$ $E_e \leq L \times 0.8$ $V_F \geq U \times 1.2$	0/1
3	Thermal Shock	H : +100°C 5 mins  L : -10°C 5 mins	50 cycles	22 pcs	U :Upper specification limit L :Lower specification limit	0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 pcs		0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 hrs	22 pcs		0/1
6	DC Operating Life	$I_F=20mA$	1000 hrs	22 pcs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 pcs		0/1

1.9mm Round Subminiature “Z-Bend” Lead Infrared LED


MODEL NO : IR91-21C/F10

■ **Test Method For Power :**

Condition : $I_F=20$ mA

Test Item : Radiant Intensity

Unit : mW/sr

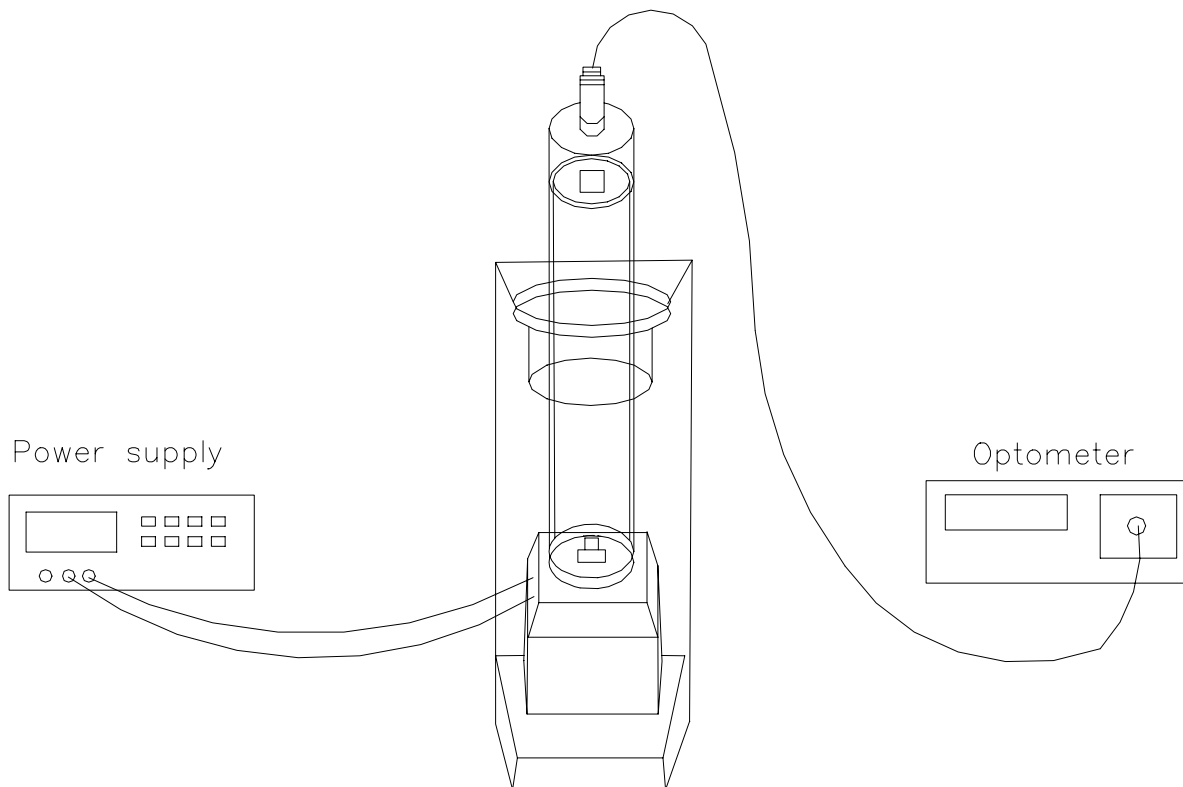


1.9mm Round Subminiature “Z-Bend” Lead Infrared LED


MODEL NO : IR91-21C/F10

■ Packing Specifications


1. Bag

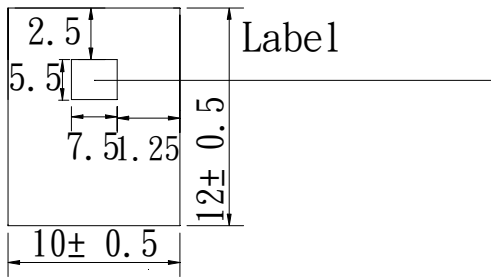

2. Box

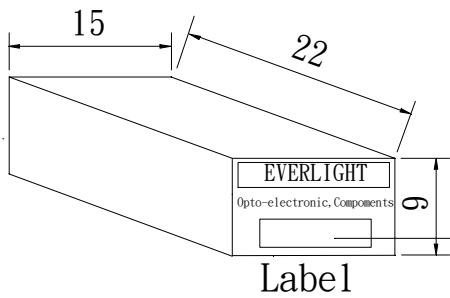

3. Carton

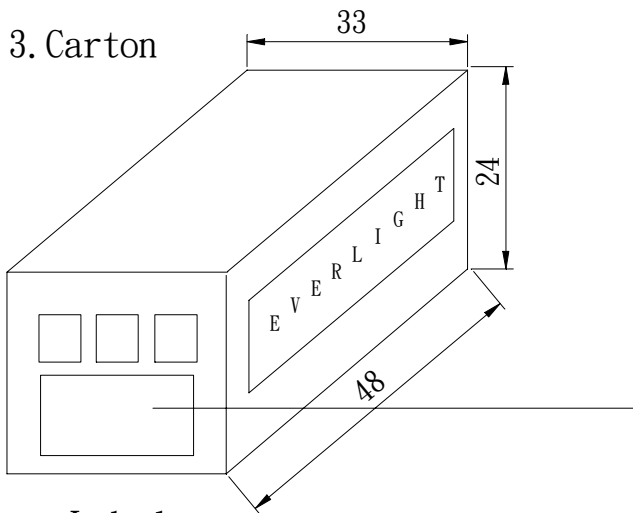

Label

UNIT : cm

EVERLIGHT

CPN:

P/N:

IR91-21C/F10

QTY:

LOT NO:

CAT:

HUE:

REF:

MADE IN TAIWAN

CPN : Customer's Production Number

P/N : Production Number

QTY : Packing Quantity

CAT : Ranks

HUE : Peak Wavelength

REF : Reference

LOT NO : Lot Number

MADE IN TAIWAN : Production place

■ Packing Quantity Specification

1. 1000 Pcs/1Bag , 20 Bags/1Box

2. 10 Boxes/1Carton