

**IS205X, IS206X**  
**IS205, IS206**



**NON-BASE LEAD**  
**OPTICALLY COUPLED ISOLATOR**  
**PHOTOTRANSISTOR OUTPUT**

**APPROVALS**

- UL recognised, File No. E91231
- **'X' SPECIFICATION APPROVALS**
- VDE 0884 in 3 available lead forms : -
  - STD
  - G form
  - SMD approved to CECC 00802
- Certified to EN60950 by the following Test Bodies :-
  - Nemko - Certificate No. P96101299
  - Fimko - Registration No. 190469-01..22
  - Semko - Reference No. 9620076 01
  - Demko - Reference No. 305567

**DESCRIPTION**



The IS205, IS206 series of optically coupled isolators consist of an infrared light emitting diode and a NPN silicon photo transistor in a standard 6 pin dual in line plastic package with the base pin unconnected.

**FEATURES**

- Options :-
  - 10mm lead spread - add G after part no.
  - Surface mount - add SM after part no.
  - Tape&reel - add SMT&R after part no.
- High Current Transfer Ratio (50% min)
- High Isolation Voltage (5.3kV<sub>RMS</sub>, 7.5kV<sub>PK</sub>)
- Base pin unconnected for improved noise immunity in high EMI environment

**APPLICATIONS**

- DC motor controllers
- Industrial systems controllers
- Signal transmission between systems of different potentials and impedances

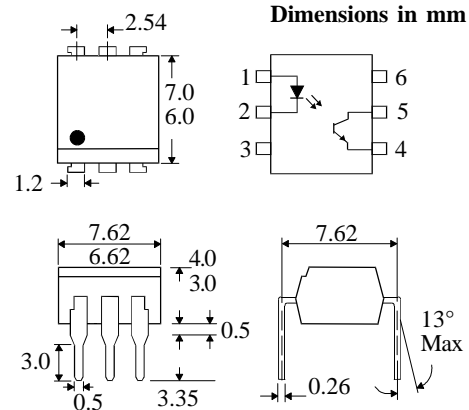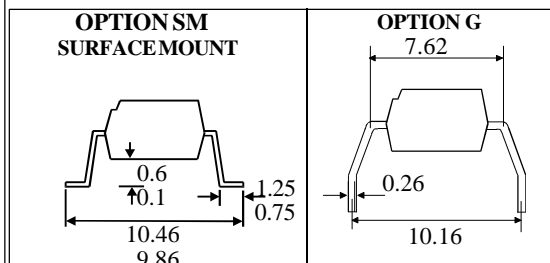

**ABSOLUTE MAXIMUM RATINGS**  
**(25°C unless otherwise specified)**

Storage Temperature \_\_\_\_\_ -55°C to + 150°C  
 Operating Temperature \_\_\_\_\_ -55°C to + 100°C  
 Lead Soldering Temperature  
 (1/16 inch (1.6mm) from case for 10 secs) 260°C

**INPUT DIODE**

Forward Current \_\_\_\_\_ 60mA  
 Reverse Voltage \_\_\_\_\_ 6V  
 Power Dissipation \_\_\_\_\_ 105mW

**OUTPUT TRANSISTOR**

Collector-emitter Voltage  $BV_{CEO}$  \_\_\_\_\_ 30V  
 Emitter-collector Voltage  $BV_{ECO}$  \_\_\_\_\_ 6V  
 Power Dissipation \_\_\_\_\_ 160mW

**POWER DISSIPATION**

Total Power Dissipation \_\_\_\_\_ 200mW  
 (derate linearly 2.67mW/°C above 25°C)

**ISOCOM COMPONENTS LTD**  
 Unit 25B, Park View Road West,  
 Park View Industrial Estate, Brenda Road  
 Hartlepool, Cleveland, TS25 1YD  
 Tel: (01429) 863609 Fax :(01429) 863581

**ISOCOM INC**  
 1024 S. Greenville Ave, Suite 240,  
 Allen, TX 75002 USA  
 Tel: (214) 495-0755 Fax: (214) 495-0901  
 e-mail info@isocom.com  
 http://www.isocom.com


**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**

| PARAMETER |  | MIN                | TYP    | MAX | UNITS                          | TEST CONDITION  |
|-----------|--|--------------------|--------|-----|--------------------------------|---|
| Input     | Forward Voltage ( $V_F$ )                                |                    | 1.2    | 1.5 | V                              | $I_F = 10\text{mA}$   |
|           | Reverse Voltage ( $V_R$ )                                | 6                  |        |     | V                              | $I_R = 10\mu\text{A}$   |
|           | Reverse Current ( $I_R$ )                                |                    |        | 10  | $\mu\text{A}$                  | $V_R = 6\text{V}$   |
| Output    | Collector-emitter Breakdown ( $BV_{CEO}$ )<br>( Note 2 ) | 30                 |        |     | V                              | $I_C = 1\text{mA}$  |
|           | Emitter-collector Breakdown ( $BV_{ECO}$ )               | 6                  |        |     | V                              | $I_E = 100\mu\text{A}$  |
|           | Collector-emitter Dark Current ( $I_{CEO}$ )             |                    |        | 50  | nA                             | $V_{CE} = 10\text{V}$   |
| Coupled   | Current Transfer Ratio (CTR) (Note 2)                    | IS205              | 100    |     | %                              | $10\text{mA } I_F, 10\text{V } V_{CE}$                        |
|           |  | IS206              | 50     |     | %                              | $10\text{mA } I_F, 10\text{V } V_{CE}$                        |
|           | Collector-emitter Saturation Voltage $V_{CE(SAT)}$       |                    |        | 0.4 | V                              | $10\text{mA } I_F, 0.5\text{mA } I_C$                         |
|           | Input to Output Isolation Voltage $V_{ISO}$              | 5300<br>7500       |        |     | $V_{RMS}$<br>$V_{PK}$          | See note 1<br>See note 1                                      |
|           | Input-output Isolation Resistance $R_{ISO}$              | $5 \times 10^{10}$ |        |     | $\Omega$                       | $V_{IO} = 500\text{V}$ (note 1)                               |
|           | Output Rise Time $t_r$<br>Output Fall Time $t_f$         |                    | 2<br>2 |     | $\mu\text{s}$<br>$\mu\text{s}$ | $V_{CE} = 10\text{V},$<br>$I_C = 2\text{mA}, R_L = 100\Omega$ |


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.


**Collector Power Dissipation vs. Ambient Temperature**

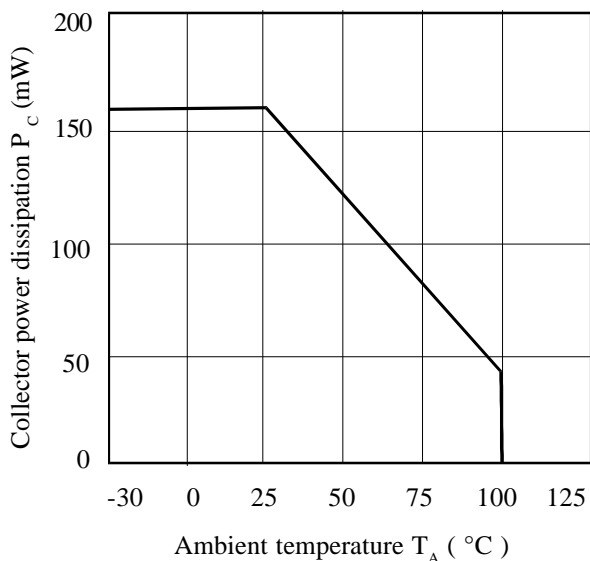


**Collector Current vs. Collector-emitter Voltage**

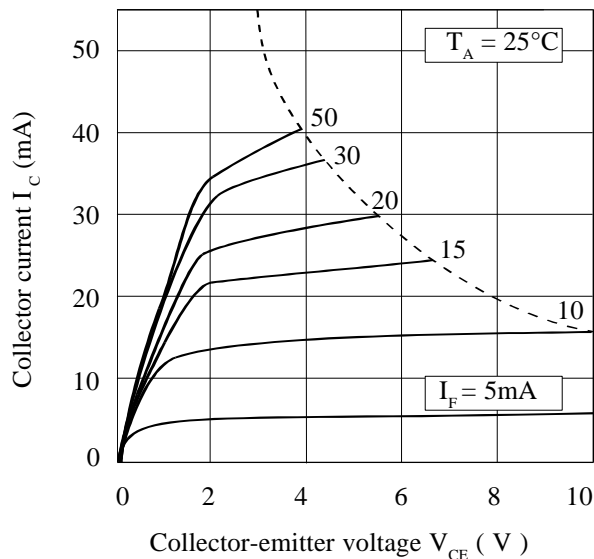


**Forward Current vs. Ambient Temperature**

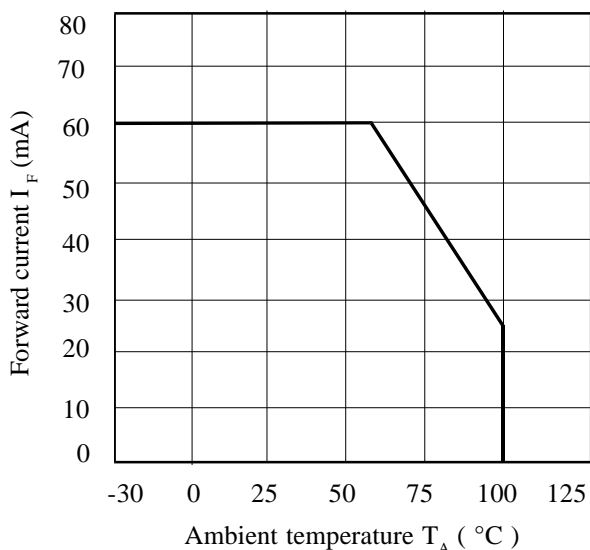

**Collector-emitter Saturation Voltage vs. Ambient Temperature**

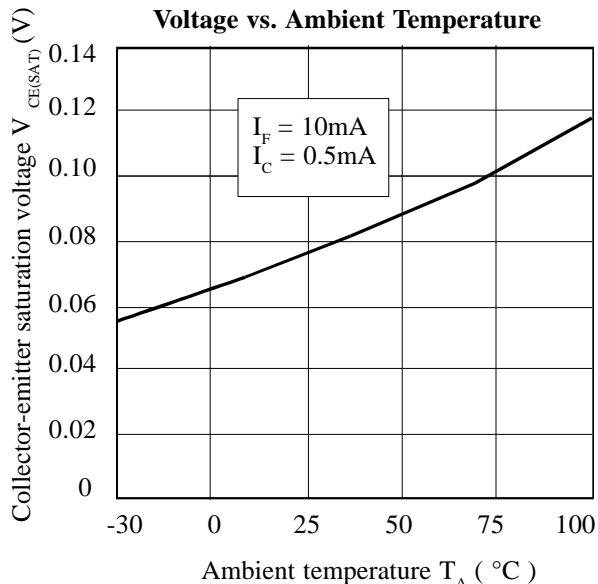

**Relative Current Transfer Ratio vs. Ambient Temperature**

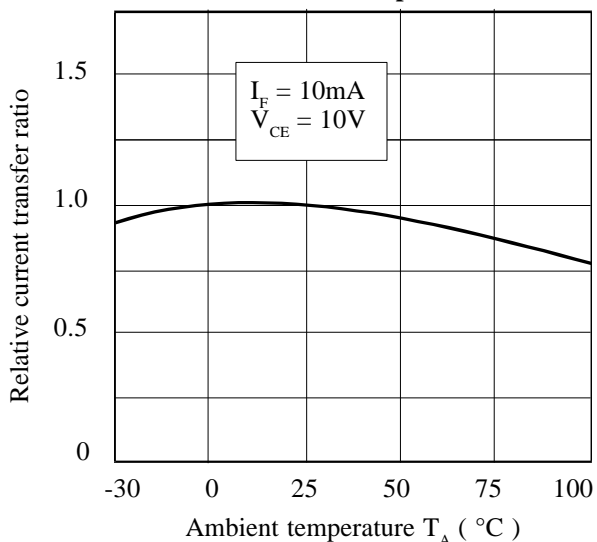

**Relative Current Transfer Ratio vs. Forward Current**

