

ISL9000AM

Dual LDO with Low Noise, Very High PSRR and Low I_Q

FN6620
 Rev 1.00
 November 11, 2011

ISL9000AMRNCP is a high performance dual LDO capable of sourcing 100mA current from each output. It has a low standby current and very high PSRR and is stable with output capacitance of 1 μ F to 10 μ F with ESR of up to 200m Ω .

The device integrates an individual Power-On-Reset (POR) function for each output. The POR delay for VO2 can be externally programmed by connecting a timing capacitor to the CPOR pin. The POR delay for VO1 is internally fixed at approximately 2ms. A reference bypass pin is also provided for connecting a noise filtering capacitor for low noise and high-PSRR applications.


The quiescent current is typically only 42 μ A with both LDO's enabled and active. Separate enable pins control each individual LDO output. When both enable pins are low, the device is in shutdown, typically drawing less than 0.1 μ A.

Output voltage for the LDO are VOUT1 = 3.3V and VOUT2 = 1.8V.

Device Information

The specifications for an Enhanced Product (EP) device are defined in a Vendor Item Drawing (VID), which is controlled by the Defense Logistics Agency (DLA). "Hot-links" to the applicable VID and other supporting application information are provided on our website.

Pinout

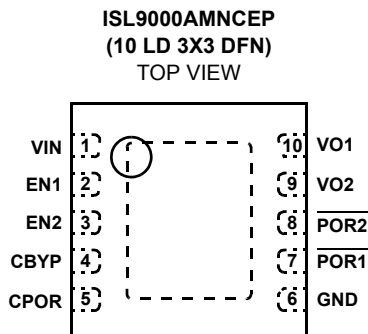

Features

- Integrates Two 100mA High Performance LDO's
- I_{OUT} per Channel is 50mA at $T_J = +150^\circ\text{C}$
- Excellent Transient Response to Large Current Steps
- $\pm 1.8\%$ Accuracy Over all Operating Conditions
- Excellent Load Regulation:
< 0.1% Voltage Change Across Full Range of Load Current
- Low Output Noise: Typically 30 μ V_{rms} @ 100 μ A (1.5V)
- Very High PSRR: 90dB @ 1kHz
- Extremely Low Quiescent Current: 42 μ A (both LDOs active)
- Wide Input Voltage Capability: 2.3V to 5.5V
- Low Dropout Voltage: Typically 200mV @ 100mA
- Stable with 1 μ F to 10 μ F Ceramic Capacitors
- Separate Enable and POR Pins for Each LDO
- Soft-Start and Staged Turn-On to Limit Input Current Surge During Enable
- Current Limit and Overheat Protection
- Tiny 10 Ld 3x3mm DFN Package
- -55 $^\circ\text{C}$ to +125 $^\circ\text{C}$ Operating Temperature Range

Applications

- PDAs, Cell Phones and Smart Phones
- Portable Instruments, MP3 Players
- Handheld Devices including Medical Handheld

Ordering Information

VENDOR PART NUMBER (Notes 1, 2)	VENDOR ITEM DRAWING	PART MARKING	VO1 VOLTAGE (V)	VO2 VOLTAGE (V)	TEMP RANGE ($^\circ\text{C}$)	PACKAGE	PKG DWG. #
ISL9000AMRNCEP	V62/08609-01XB	DKTA	3.3	1.8	-55 to +125	10 Ld 3x3 DFN	L10.3x3C


NOTES:

1. Add -T to part number for tape and reel.
2. Devices must be procured to the VENDOR PART NUMBER.

Dual Flat No-Lead Plastic Package (DFN)

L10.3x3C

10 LEAD DUAL FLAT NO-LEAD PLASTIC PACKAGE

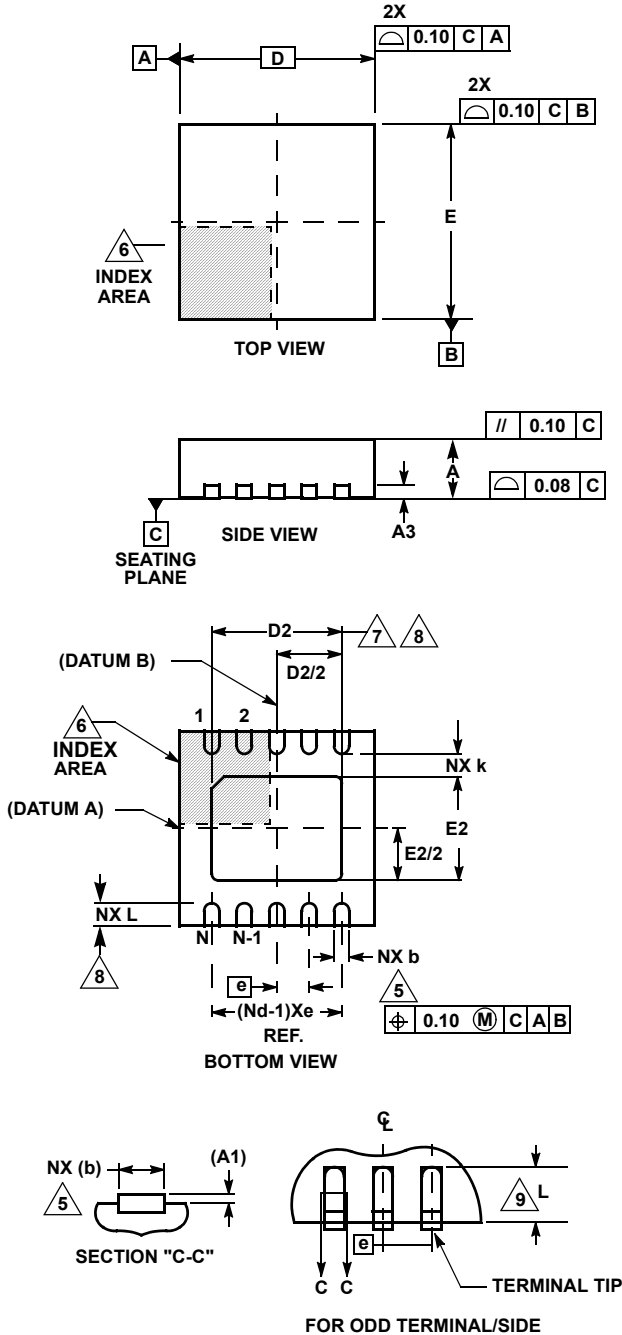

SYMBOL	MILLIMETERS			NOTES
	MIN	NOMINAL	MAX	
A	0.85	0.90	0.95	-
A1	-	-	0.05	-
A3	0.20 REF			-
b	0.20	0.25	0.30	5, 8
D	3.00 BSC			-
D2	2.33	2.38	2.43	7, 8
E	3.00 BSC			-
E2	1.59	1.64	1.69	7, 8
e	0.50 BSC			-
k	0.20	-	-	-
L	0.35	0.40	0.45	8
N	10			2
Nd	5			3

Rev. 1 4/06

NOTES:

1. Dimensioning and tolerancing conform to ASME Y14.5-1994.
2. N is the number of terminals.
3. Nd refers to the number of terminals on D.
4. All dimensions are in millimeters. Angles are in degrees.
5. Dimension b applies to the metallized terminal and is measured from 0.15mm and 0.30mm from the terminal tip.
6. The configuration of the pin #1 identifier is optional, but must be located within the zone indicated. The pin #1 identifier may be either a mold or mark feature.
7. Dimensions D2 and E2 are for the exposed pads which provide improved electrical and thermal performance.
8. Nominal dimensions are provided to assist with PCB Land Pattern Design efforts, see Intersil Technical Brief TB389.
9. COMPLIANT TO JEDEC MO-229-WEED-3 except for dimensions E2 & D2.

© Copyright Intersil Americas LLC 2007-2011. All Rights Reserved.
 All trademarks and registered trademarks are the property of their respective owners.

For additional products, see www.intersil.com/en/products.html

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at www.intersil.com/en/support/qualandreliability.html

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com