




SMD Oscillator, TTL / HC-MOS Ceramic Package, 5 mm x 7 mm

ISM91 / ISM94 Series

Frequency	10 KHz to 170.000 MHz	
Output Level	TTL	HC-MOS
Level	'0' = 0.4 VDC Max., '1' = 2.4 VDC Min.	'0' = 0.1 Vcc Max., '1' = 0.9 Vcc Min.
Duty Cycle	Specify 50% ± 10% or ± 5% See Table	
Rise / Fall Time	5 nS Max. @ Vcc = +3.3 VDC, 10 nS Max. @ Vcc = +5 VDC ***	
Output Load	Fo < 50 MHz = 10 TTL, Fo > 50 MHz = 5 LSTTL	See Table
Frequency Stability	See Frequency Stability Table (Includes room temperature tolerance and stability over operating temperature)	
Start-up Time	10 mS Max.	
Enable / Disable Time	100 nS Max.	
Supply Voltage	See Input Voltage Table, tolerance ±5 %	
Current	70 mA Max. ***	
Temperature		
Operating	See Operating Temperature Table	
Storage	-55° C to +125° C	
Environmental / Tape and Reel	See Appendix B for Environmental information, Appendix C for Tape and Reel information	
Package Information	MSL = N.A., Termination = e4	

Programmable version is available for quick delivery, part number ISM91P.

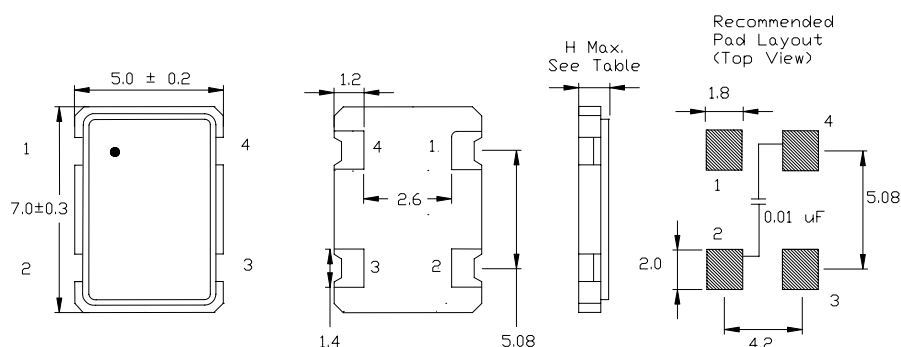

Tri-State Function	
Pin 1 Open	Enable
Pin 1 ≥ 70% Vdd	Enable
Pin 1 ≤ 30% Vdd	Disable

H = Height	
ISM91	1.8 mm Max.
ISM94 *	1.4 mm Max.
* Not available at all frequencies	

Pin	Connection
1	Enable / Disable
2	Ground
3	Output
4	Vdd

Dimension Units: mm

Part Number Guide		Sample Part Number: ISM91 - 3251BH - 20.000					
Package	Input Voltage	Operating Temperature	Symmetry (Duty Cycle)	Output	Stability (in ppm)	Enable / Disable	Frequency
ISM91 - (1.8 mm H)	5 = 5.0 V	1 = 0° C to +70° C	5 = 45 / 55 Max.	1 = 10TTL / 15 pF HC-MOS	**E = ±10	H = Enable	- 20.000 MHz
	3 = 3.3 V	6 = -10° C to +70° C	6 = 40 / 60 Max.	3 = 15 pF HC-MOS	**D = ±15		
	7 = 3.0 V	3 = -20° C to +70° C		6 = 30 pF	F = ±20		
ISM94 - (1.4 mm H)	2 = 2.7 V	4 = -30° C to +75° C		5 = 50 pF HC-MOS (<40 MHz)	A = ±25		
	6 = 2.5 V	2 = -40° C to +85° C		4 = AC-MOS	B = ±50		
	1 = 1.8 V*				C = ±100		

NOTE: A 0.01 µF bypass capacitor is recommended between Vcc (pin 4) and Gnd (pin 2) to minimize power supply noise.

* Not available at all frequencies. ** Not available for all temperature ranges. *** Frequency, supply, and load related parameters.

ILSI America Phone: 775-851-8880 • Fax: 775-851-8882 • e-mail: e-mail@ilsiamerica.com • www.ilsiamerica.com
Specifications subject to change without notice

03/06

D7

www.DataSheet4U.com

www.DataSheet4U.com