



EVERLIGHT ELECTRONICS CO., LTD.

DATA SHEET

MODEL NO : ITR20006

DATE : 2, 14, 2001

DEPARTMENT : R&D 2

REVISION : 1.0

RECEIVED			
☒ MASS PRODUCTION			
☐ PRELIMINARY			
☐ CUSTOMER DESIGN			
DEVICE NUMBER : DRX-006-109			
PAGE :7			
CUSTOMER	DESIGNER	CHECKER	APPROVER

1.0	Establish new data sheet	2000.2.15
REV	DESCRIPTION	RELEASE DATE

OFFICE:..NO.25,LANE76,SEC.3,CHUNG YANG RD.,TUCHENG 236,TAIPEI,TAIWAN,R.O.C

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,2267-6306

<http://www.everlight.com>



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DRX-006-109 REV : 1.0
ECN : _____ PAGE : 1/7

Photointerrupter

MODEL NO : ITR20006

■ Features :

- Wide gap between lighter and detector (3.8mm)
- High sensing accuracy
- PWB mounting type package

■ Description :

The ITR20005(Slot Optical switch) is a gallium arsenide infrared emitting diode which is coupled with a silicon photo transistor in a plastic housing. The package system is designed to optimize the mechanical resolution, coupling efficiency, and insulates ambient light. The ITR is useful in the application of interrupting the signal with printer, scanner, copier, or other opaque material, switching the output from an "ON" to "OFF" state.

■ Applications :

- Mouse
- Opto-electronic switches

PART NO.	CHIP	LENS COLOR
	MATERIAL	
IR	GaAs ,GaAlAs	CLEAR
PT	Silicon	CLEAR



EVERLIGHT ELECTRONICS CO., LTD.


DEVICE NUMBER : DRX-006-109
ECN :

REV : 1.0
PAGE : 2/7

Photointerrupter

MODEL NO : ITR20006

■ Package Dimension :

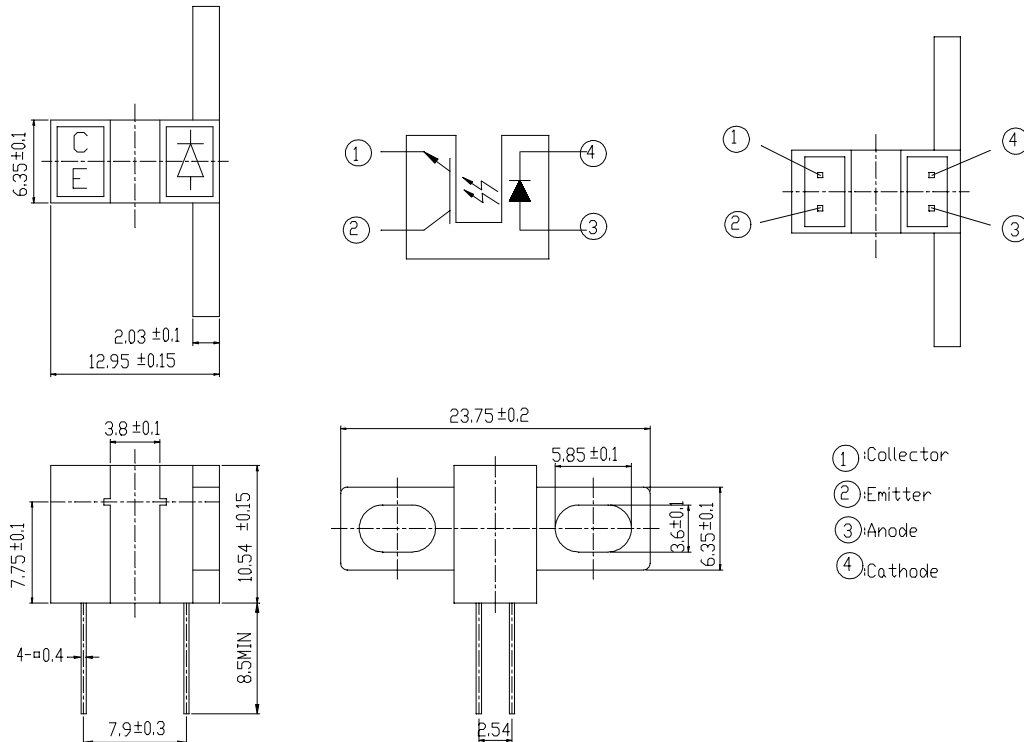

■ Notes :

- 1.All dimensions are in millimeter.
- 2.General tolerance: $\pm 0.1\text{mm}$
- 3.Lead spacing is measured where the lead emerge from the package.
- 4.Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 5.These specification sheets include materials protected under copyright of EVERLIGHT corporation . Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 6.When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DRX-006-109
ECN :

REV : 1.0
PAGE : 3/7

Photointerrupter

MODEL NO : ITR20006

■ Absolute Maximum Ratings (Ta=25℃)

Parameter		Symbol	Ratings	Unit
Input	Power Dissipation at(or below) 25℃ Free Air Temperature	P _d	75	mW
	Reverse Voltage	V _R	5	V
	Forward Current	I _F	50	mA
	Peak Forward Current Pulse width ≤100 μs, Duty cycle=1%	I _{FP}	1	A
Output	Collector Power Dissipation	P _C	75	mW
	Collector Current	I _C	20	mA
	Collector-Emitter Voltage	V _{CEO}	30	V
	Emitter-Collector Voltage	V _{ECO}	5	V
Operating Temperature		T _{opr}	-25~+85	℃
Storage Temperature		T _{stg}	-40~+85	℃
Lead Soldering Temperature (1/16 inch from body for 5 seconds)		T _{sol}	260	℃

■ Electro-Optical Characteristics (Ta=25℃)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Input	Forward Voltage	V _F	-	1.2	1.6	V	I _F =20mA
	Reverse Current	I _R	-	-	10	μA	V _R =5V
	Peak Wavelength	λ _P	-	940	-	nm	I _F =20mA
	View Angle	2θ _{1/2}	-	60	-	Deg	I _F =20mA
Output	Collector Dark Current	I _{CEO}	-	-	100	nA	V _{CE} =10V Ee=0mW/cm ²
Transfer Characteristic	C-E Saturation Voltage	V _{CE(sat)}	-	-	0.4	V	I _C =2mA Ee=1mW/cm ²
	Collector Current	I _{C(ON)}	0.5	-	-	mA	V _{CE} =5V I _F =20mA
	Rise time	t _r	-	20	-	μsec	V _{CE} =5V
	Fall time	t _f	-	20	-	μsec	I _C =1mA R _L =1KΩ



Photointerrupter

MODEL NO : ITR20006

■ Typical Electrical/Optical/Characteristics Curves For IR

Fig. 1 Forward Current vs. Ambient Temperature

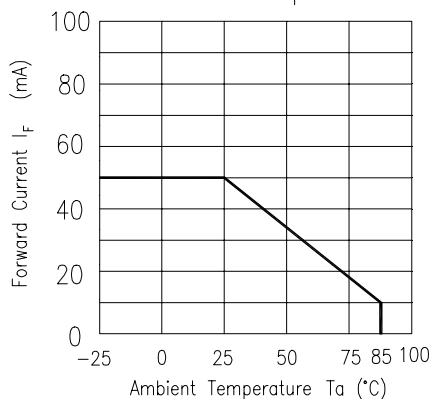


Fig. 2 Spectral Distribution

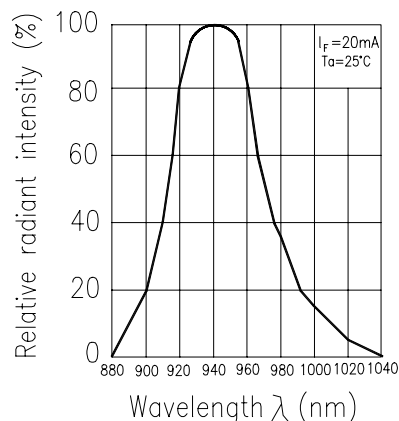


Fig. 3 Peak Emission Wavelength vs. Ambient Temperature

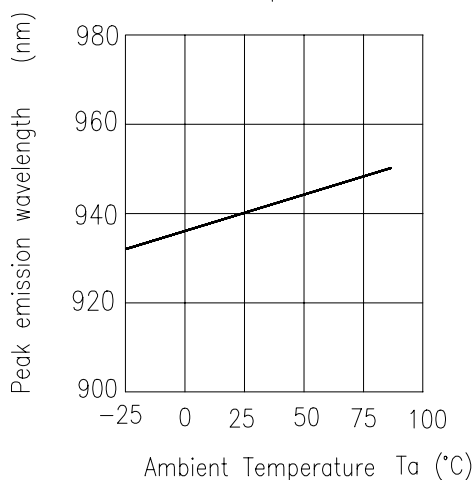


Fig. 4 Forward Current vs. Forward Voltage

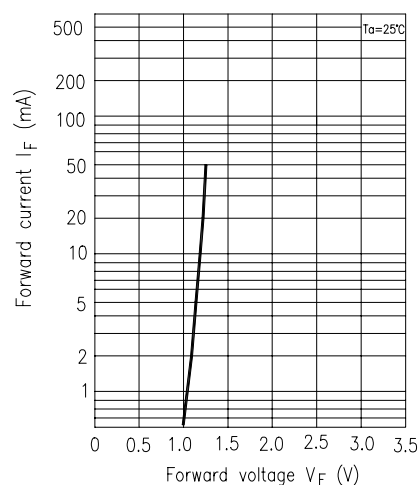


Fig. 5 Forward Voltage vs. Ambient Temperature


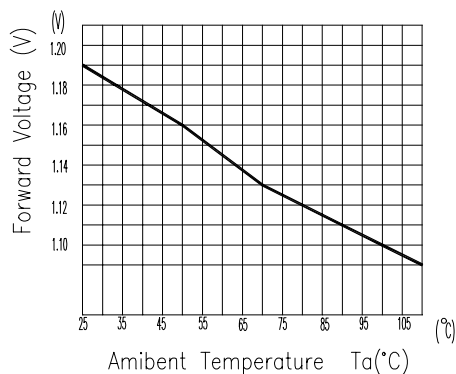


Fig. 6 Relative Radiant Intensity vs. Angular Displacement







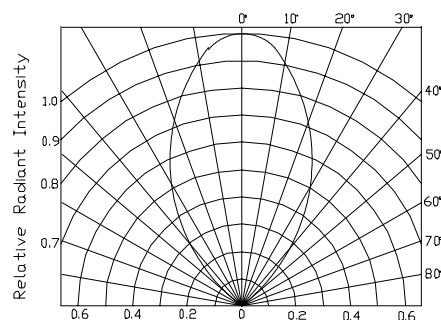



Photointerrupter

MODEL NO : ITR20006

■ Typical Electrical/Optical/Characteristics Curves For PT

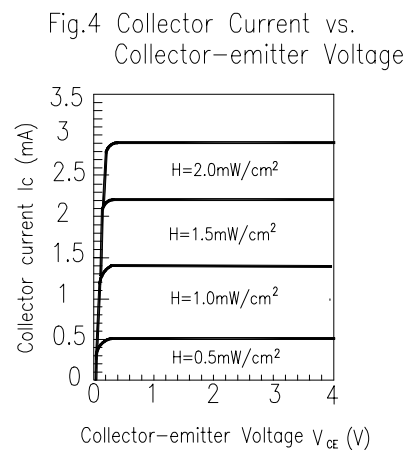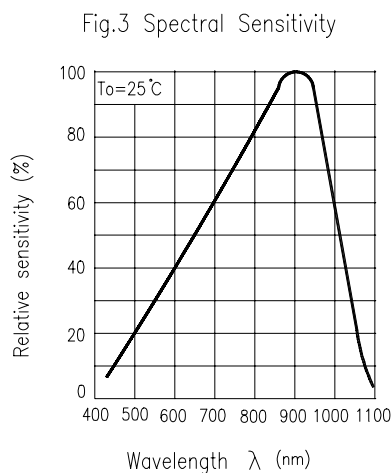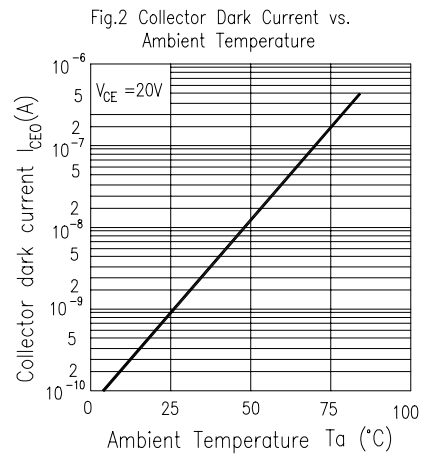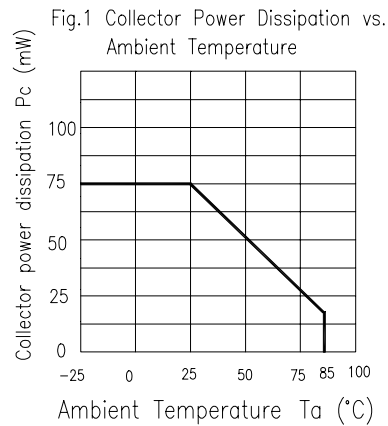

■ Typical Electrical/Optical/Characteristics Curves For ITR

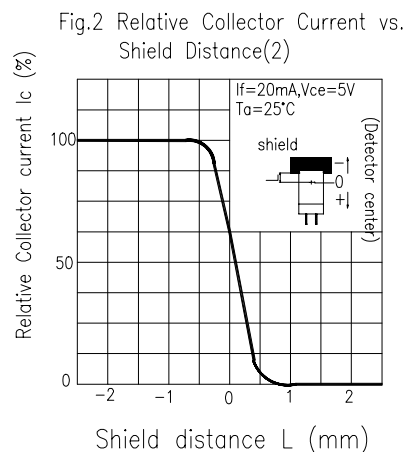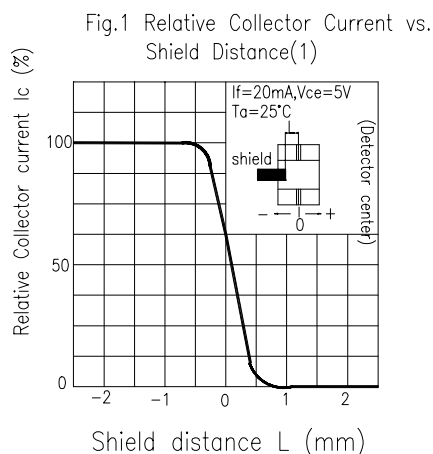

Photointerrupter

MODEL NO : ITR20006

■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycle	Sample Size	Failure Judgement Criteria	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 sec	22 PCs	$I_{c(on)} \leq L \times 0.8$ L :Lower specification limit	0/1
2	Temperature Cycle	H : +85°C 30 min  5 min  L : -55°C 30 min	50 cycle	22 PCs		0/1
3	Thermal Shock	H : +100°C 5 min  10 sec  L : -10°C 30 min	50 cycle	22 PCs		0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 PCs		0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 hrs	22 PCs		0/1
6	DC Operating Life	V _{CE} =5V	1000 hrs	22 PCs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 PCs		0/1



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DRX-006-109
ECN :


REV : 1.0
PAGE : 7/7

Photointerrupter


MODEL NO : ITR20006

■ Packing Specifications

1. Bag

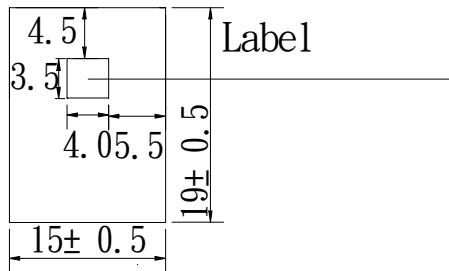

2. Box

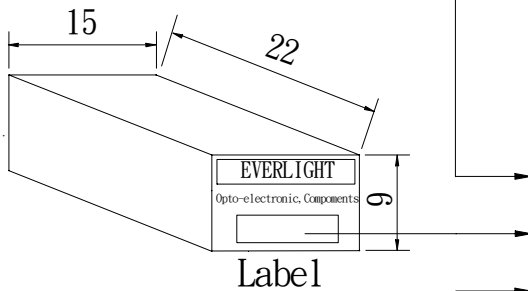

EVERLIGHT

CPN:

P/N:



ITR20006

QTY:



LOT NO:


CAT:

HUE:

REF:

MADE IN TAIWAN

3. Carton

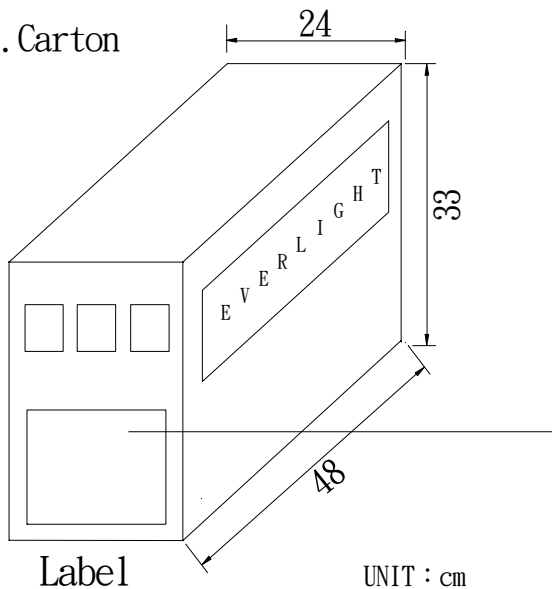

CPN : Customer's Production Number

P/N : Production Number

QTY : Packing Quantity

CAT : Ranks

HUE : Peak Wavelength

REF : Reference

LOT NO : Lot Number

MADE IN TAIWAN : Production place

■ Packing Quantity Specification

1. 150 Pcs /1Bag , 4 Bags /1Box

2. 10 Boxes /1Carton