



# Technical Data Sheet


## OPTO INTERRUPTER

---

### ITR8105

#### ■ Features

- Wide gap between light emitter and detector(2.6 mm)
- High sensing accuracy
- Pb free
- The product itself will remain within RoHS compliant version.

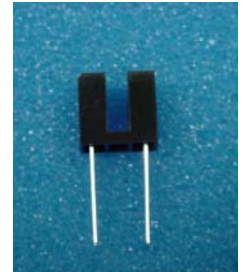

#### ■ Descriptions

The ITR8105 is a gallium arsenic infrared emitting diode which is coupled with a silicon photo transistor in a plastic housing. The packaging system is designed to optimize the mechanical resolution, coupling efficiency, and insulates ambient light. The slot in the housing provides a means of interrupting the signal with printer, scanner, copier, or other opaque material, switching the output from an "ON" to "OFF" state.

#### ■ Applications

- Copier
- Printer
- Facsimile
- Ticket vending machine
- Opto-electronic switch

#### ■ Device Selection Guide


Device No.	Chip Material	LENS COLOR
IR	GaAs	Water clear
PT	Silicon	Water clear

# Technical Data Sheet

## OPTO INTERRUPTER

**ITR8105**

### Package Dimensions

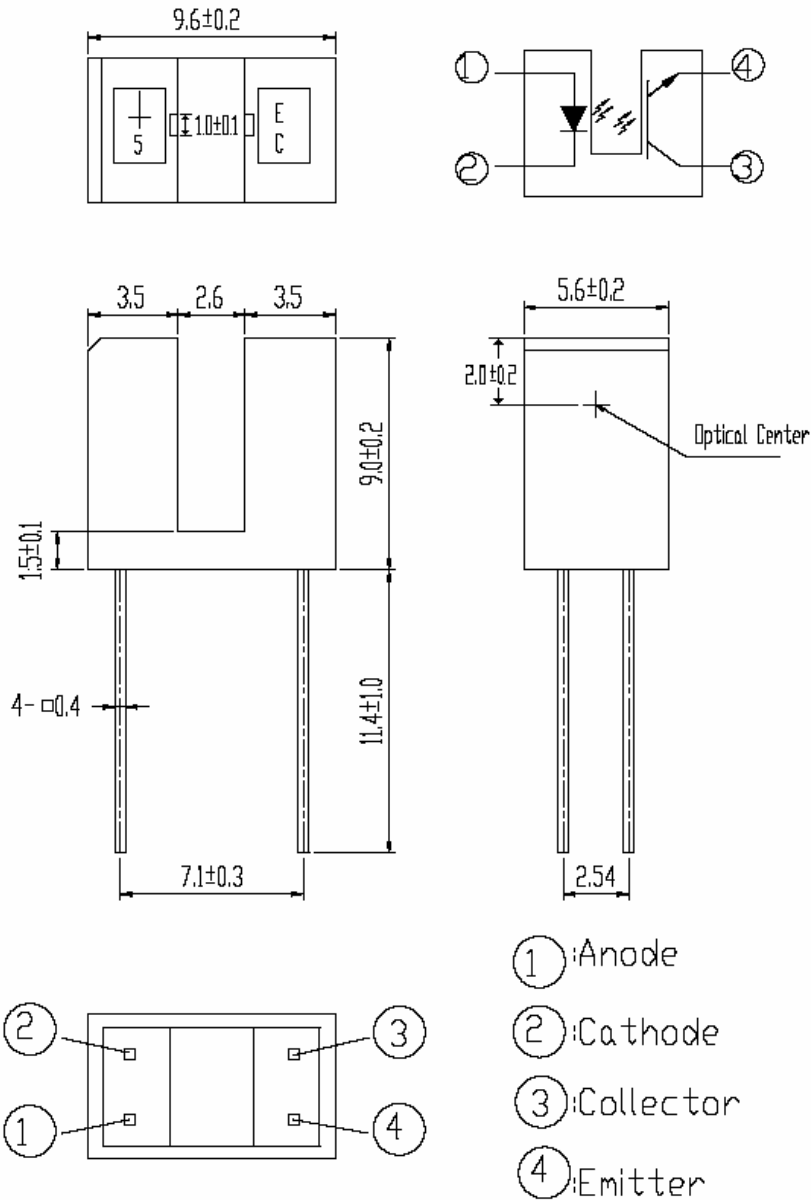

- Notes:**
1. All dimensions are in millimeters
  2. The tolerance not marked is  $\pm 0.20$  mm in the drawing.



# Technical Data Sheet

## OPTO INTERRUPTER

### Absolute Maximum Ratings (Ta=25°C)

**ITR8105**

Parameter		Symbol	Ratings	Unit
Input	Power Dissipation at(or below) 25°C Free Air Temperature	Pd	75	mW
	Reverse Voltage	V <sub>R</sub>	5	V
	Forward Current	I <sub>F</sub>	50	mA
	Peak Forward Current Pulse width ≤ 100 μs, Duty cycle=1%	I <sub>FP</sub>	1	A
Output	Collector Power Dissipation	P <sub>C</sub>	75	mW
	Collector Current	I <sub>C</sub>	20	mA
	Collector-Emitter Voltage	V <sub>CEO</sub>	30	V
	Emitter-Collector Voltage	V <sub>ECO</sub>	5	V
Operating Temperature		T <sub>opr</sub>	-25~+85	°C
Storage Temperature		T <sub>stg</sub>	-40~+85	°C
Lead Soldering Temperature (1/16 inch from body for 5 seconds)		T <sub>sol</sub>	260	°C

### Electro-Optical Characteristics (Ta=25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Input	Forward Voltage	V <sub>F</sub>	--	1.2	1.6	V	I <sub>F</sub> =20mA
	Reverse Current	I <sub>R</sub>	-	-	10	μA	V <sub>R</sub> =5V
	Peak Wavelength	λ <sub>P</sub>	-	940	-	nm	I <sub>F</sub> =20mA
Output	Dark Current	I <sub>CEO</sub>	-	-	100	nA	V <sub>CE</sub> =10V
	C-E Saturation Voltage	V <sub>CE(sat)</sub>	-	-	0.4	V	I <sub>C</sub> =0.5mA, I <sub>F</sub> =20mA
Transfer Characteristics	Collector Current	I <sub>C(ON)</sub>	1	4	15	mA	V <sub>CE</sub> =5V, I <sub>F</sub> =10mA
	Rise Time	t <sub>R</sub>	-	20	-	μs	V <sub>CE</sub> =5V, I <sub>C</sub> =1 mA , R <sub>L</sub> =1 KΩ
	Fall Time	t <sub>F</sub>	-	20	-	μs	

# Technical Data Sheet

## OPTO INTERRUPTER

**ITR8105**

### Typical Electrical/Optical/Characteristics Curves for IR

Fig. 1 Forward Current vs. Ambient Temperature

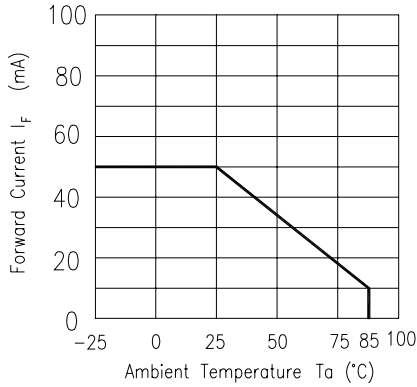


Fig. 2 Spectral Distribution

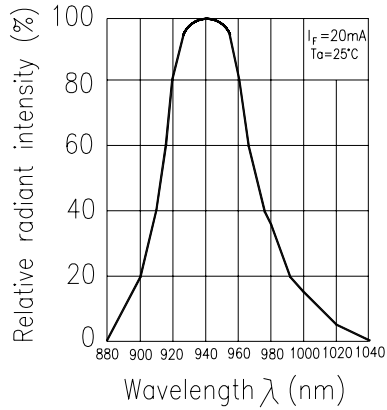


Fig. 3 Peak Emission Wavelength vs. Ambient Temperature

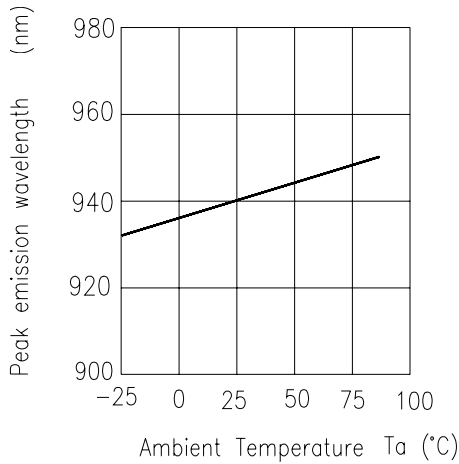


Fig. 4 Forward Current vs. Forward Voltage

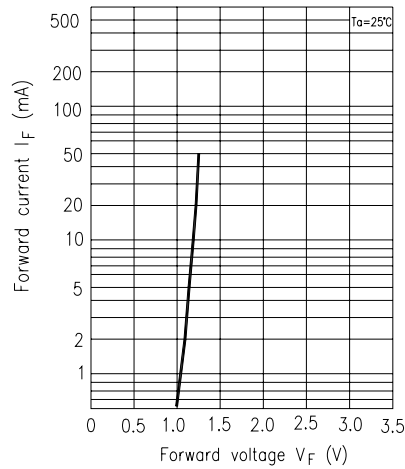


Fig. 5 Forward Voltage vs. Ambient Temperature


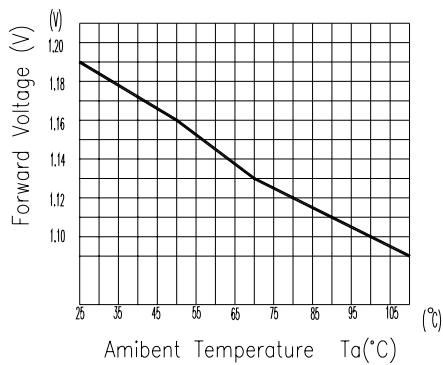


Fig. 6 Relative Radiant Intensity vs. Angular Displacement




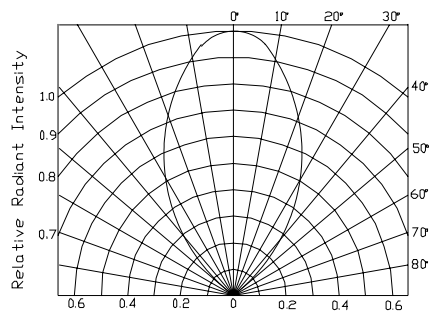


# Technical Data Sheet



## OPTO INTERRUPTER

### Typical Electrical/Optical/Characteristics Curves for PT

**ITR8105**

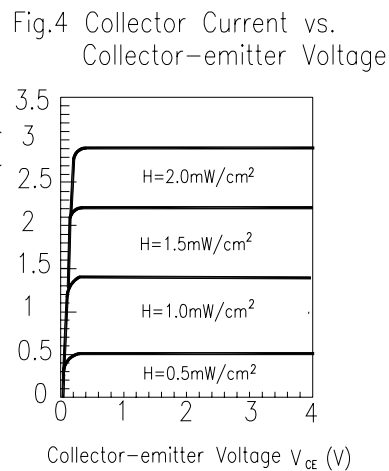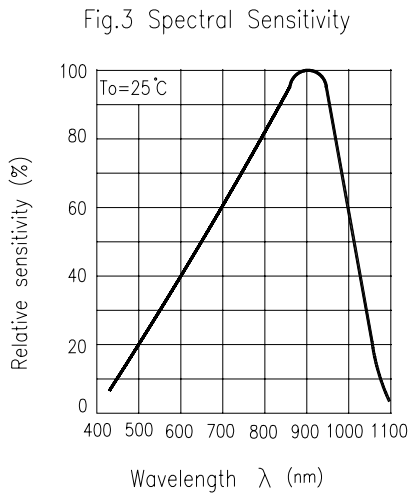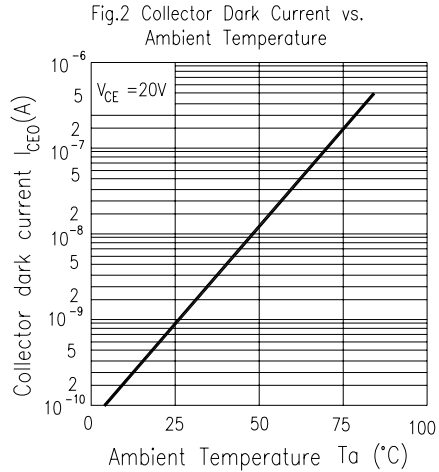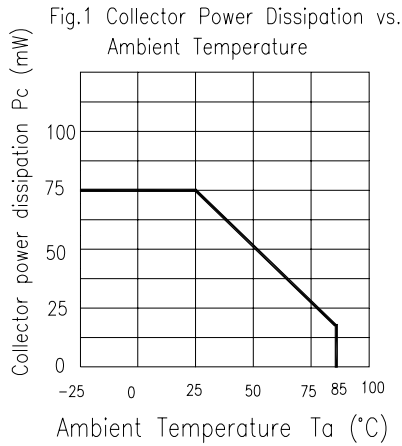

### Typical Electro-Optical Characteristics Curves

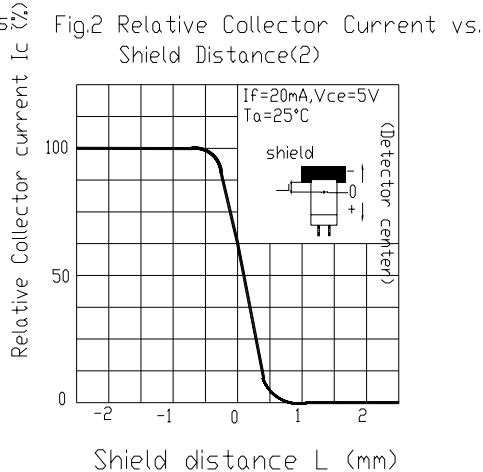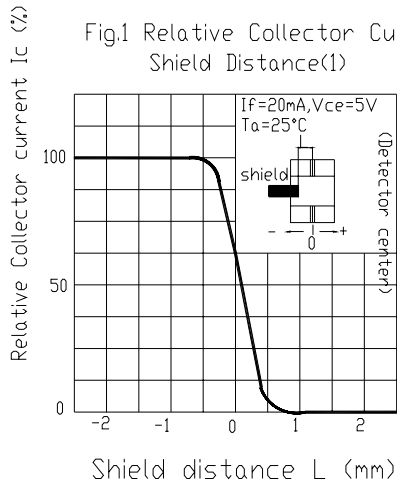



# Technical Data Sheet

## OPTO INTERRUPTER

**ITR8105**

### Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level : 90% 、LTPD : 10%

NO.	Item	Test Conditions	Test Hours/ Cycles	Sample Sizes	Failure Judgement Criteria	Ac/Re
1	Solder Resistance	$T_a = 260 \pm 3^\circ\text{C}$	$10 \pm 1$ sec	22pcs		0/1
2	Temperature Cycle	H : $+85^\circ\text{C}$ 15mins ↕ 5mins L : $-55^\circ\text{C}$ 15mins	50Cycles	22pcs	$V_F \geq U \times 1.2$ $I_{C(ON)} \leq L \times 0.8$	0/1
3	Thermal Shock	H : $+85^\circ\text{C}$ 5mins ↕ 10secs L : $-55^\circ\text{C}$ 5mins	50Cycles	22pcs	U : Upper Specification Limit	0/1
4	High Temperature Storage	TEMP. : $+100^\circ\text{C}$	1000hrs	22pcs	L : Lower Specification	0/1
5	Low Temperature Storage	TEMP. : $-55^\circ\text{C}$	1000hrs	22pcs	Limit	0/1
6	DC Operating Life	$V_{CE} = 5\text{V}$	1000hrs	22pcs		0/1
7	High Temperature/ High Humidity	$85^\circ\text{C}$ / 85% R.H	1000hrs	22pcs		0/1




# Technical Data Sheet

## OPTO INTERRUPTER


**ITR8105**

### ■ Packing Specifications



1. Bag

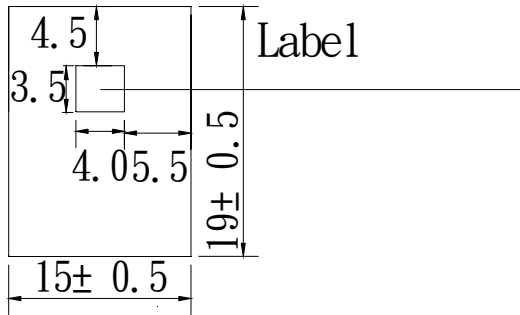

2. Box

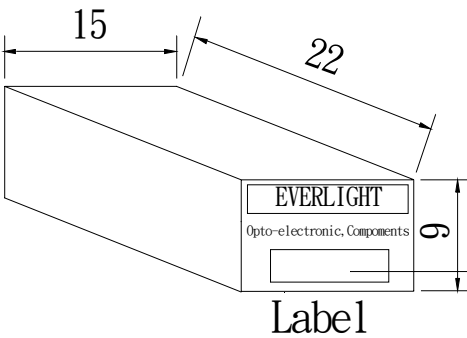

3. Carton

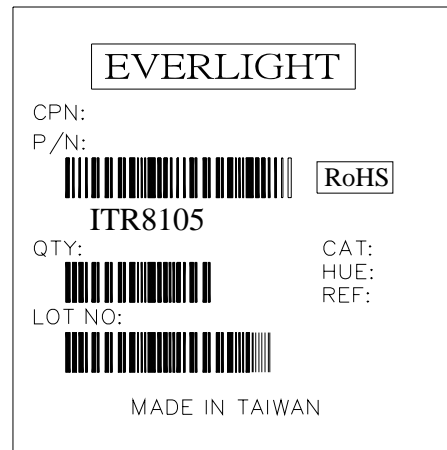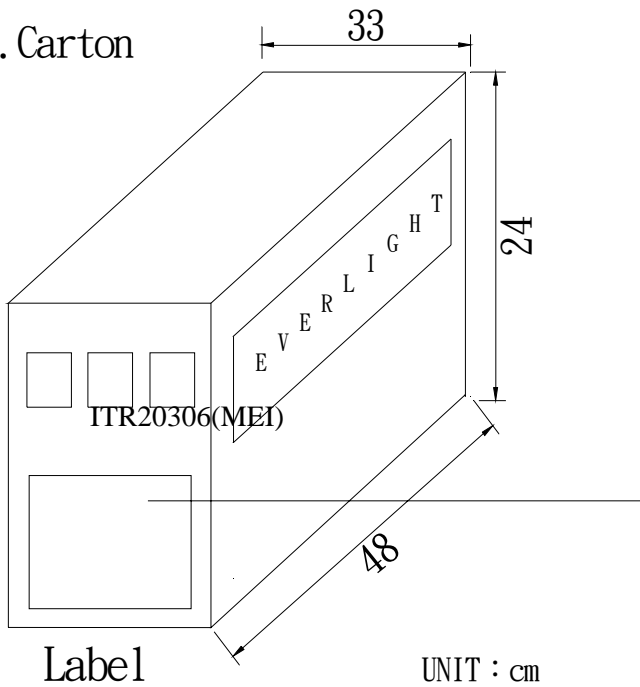

CPN: Customer's Production Number  
P/N : Production Number  
QTY: Packing Quantity  
CAT: Ranks  
HUE: Peak Wavelength  
REF: Reference  
LOT No: Lot Number  
MADE IN TAIWAN: Production Place



# Technical Data Sheet

## OPTO INTERRUPTER

---

**ITR8105**

### ■ Packing Quantity Specification

1. 150Pcs/1Bag , 4Bags/1Box
2. 10Boxes/1Carton

#### Notes

Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.

When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

These specification sheets include materials protected under copyright of EVERLIGHT CO. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT consent.

**EVERLIGHT ELECTRONICS CO., LTD.**

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>