

XPT IGBT

Single IGBT

Part number


IXA220I650NA

tentative

$$V_{CES} = 650V$$


$$I_{C25} = 255A$$

$$V_{CE(sat)} = 1.6V$$

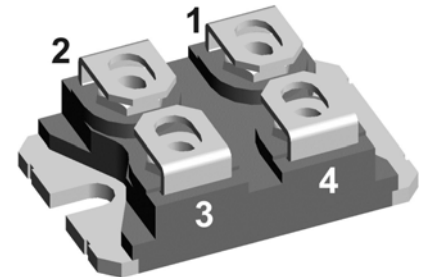

Backside: isolated

 E72873

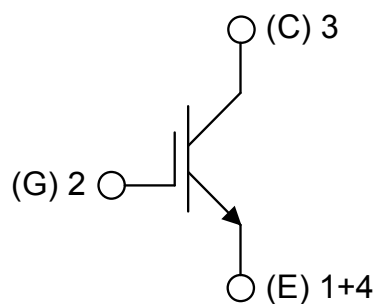

Features / Advantages:

- Easy paralleling due to the positive temperature coefficient of the on-state voltage
- Rugged XPT design (Xtreme light Punch Through) results in:
 - short circuit rated for 10 μ sec.
 - very low gate charge
 - low EMI
 - square RBSOA @ 2x I_C
- Thin wafer technology combined with the XPT design results in a competitive low $V_{CE(sat)}$

Applications:

- AC motor drives
- Solar inverter
- Medical equipment
- Uninterruptible power supply
- Air-conditioning systems
- Welding equipment
- Switched-mode and resonant-mode power supplies
- Inductive heating, cookers
- Pumps, Fans

Package: SOT-227B (minibloc)

- Isolation Voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Base plate: Copper internally DCB isolated
- Advanced power cycling
- Either emitter terminal can be used as main or Kelvin emitter


IGBT				Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit	
V _{CES}	collector emitter voltage	T _{VJ} = 25°C			650	V	
V _{GES}	max. DC gate voltage				±20	V	
V _{GEM}	max. transient gate emitter voltage				±30	V	
I _{C25}	collector current	T _C = 25°C			255	A	
I _{C80}		T _C = 80°C			156	A	
P _{tot}	total power dissipation	T _C = 25°C			625	W	
V _{CE(sat)}	collector emitter saturation voltage	I _C = 200A; V _{GE} = 15 V		1.6	1.8	V	
				1.9		V	
V _{GE(th)}	gate emitter threshold voltage	I _C = 3.2mA; V _{GE} = V _{CE}	4	4.8	5.5	V	
I _{CES}	collector emitter leakage current	V _{CE} = V _{CES} ; V _{GE} = 0 V		0.1	0.1	mA	
						mA	
I _{GES}	gate emitter leakage current	V _{GE} = ±20 V			500	nA	
Q _{G(on)}	total gate charge	V _{CE} = 300 V; V _{GE} = 15 V; I _C = 200 A		280		nC	
t _{d(on)}	turn-on delay time	inductive load V _{CE} = 300 V; I _C = 200 A V _{GE} = ±15 V; R _G = 3.9 Ω		30		ns	
t _r	current rise time			50		ns	
t _{d(off)}	turn-off delay time			100		ns	
t _f	current fall time			40		ns	
E _{on}	turn-on energy per pulse			2		mJ	
E _{off}	turn-off energy per pulse			7.6		mJ	
RBSOA	reverse bias safe operating area	V _{GE} = ±15 V; R _G = 3.9 Ω					
I _{CM}		V _{CEmax} = 650V			400	A	
SCSOA	short circuit safe operating area	V _{CEmax} = 650 V					
t _{sc}	short circuit duration	V _{CE} = 360 V; V _{GE} = ±15 V			10	μs	
I _{sc}	short circuit current	R _G = 3.9 Ω; non-repetitive		800		A	
R _{thJC}	thermal resistance junction to case				0.2	K/W	
R _{thCH}	thermal resistance case to heatsink			0.10		K/W	

tentative

Package SOT-227B (minibloc)				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal ¹⁾				150	A
T_{VJ}	virtual junction temperature			-40		150	°C
T_{op}	operation temperature			-40		125	°C
T_{stg}	storage temperature			-40		150	°C
Weight					30		g
M_D	mounting torque			1.1		1.5	Nm
M_T	terminal torque			1.1		1.5	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	10.5	3.2			mm
$d_{Spb/Apb}$		terminal to backside	8.6	6.8			mm
V_{ISOL}	isolation voltage	t = 1 second		3000			V
		t = 1 minute	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	2500			V

¹⁾ I_{RMS} is typically limited by the pin-to-chip resistance (1); or by the current capability of the chip (2). In case of (1) and a product with multiple pins for one chip-potential, the current capability can be increased by connecting the pins as one contact.

Product Marking

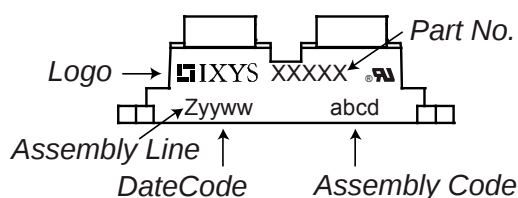

Part description

I = IGBT
 X = XPT IGBT
 A = Gen 1 / std
 220 = Current Rating [A]
 I = Single IGBT
 650 = Reverse Voltage [V]
 NA = SOT-227B (minibloc)

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	IXA220I650NA	IXA220I650NA	Tube	10	514555


Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 150^\circ\text{C}$

		IGBT	
$V_{0\max}$	threshold voltage	1.1	V
$R_{0\max}$	slope resistance *	5.3	mΩ

Outlines SOT-227B (minibloc)

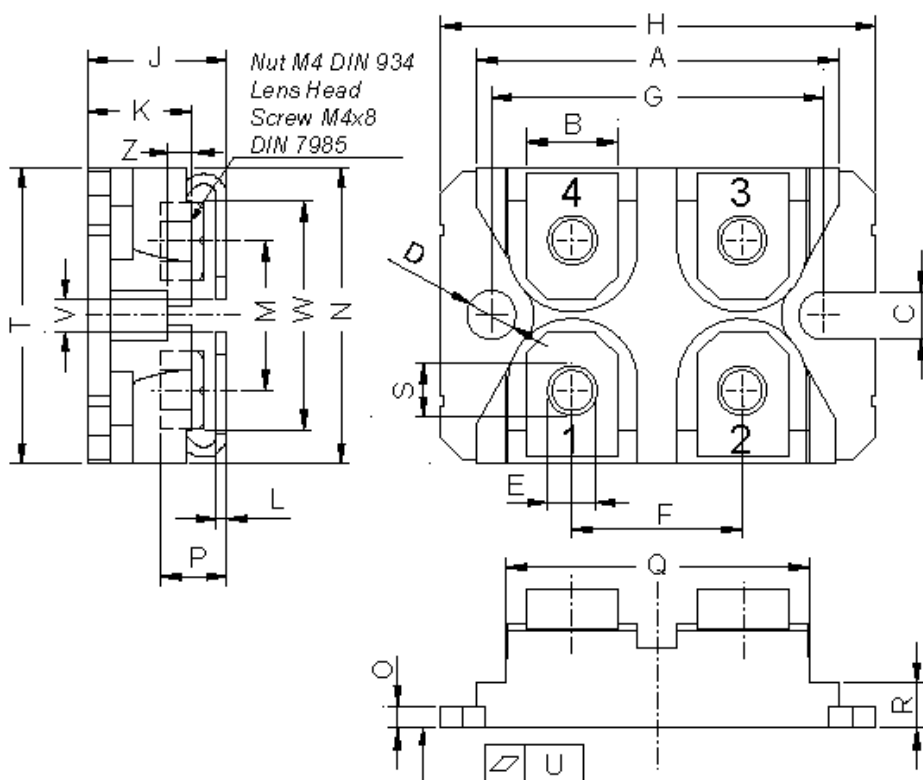

Dim.	Millimeter		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.167
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

