


IZ5035

IZB30,8-BPKG/AS

Metal housing Ø 4mm
Plug and socket

Sensing range 0.8mm [f]
flush mountable

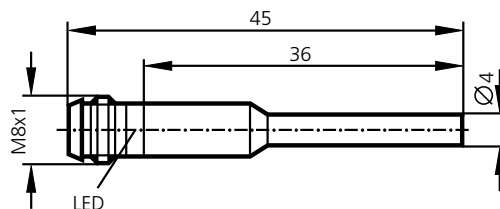

Electrical Design Output

Operating voltage	[V]
Current rating (continuous)	[mA]
Current rating (peak)	[mA]
Minimum load current	[mA]
Short circuit protection	
Reverse polarity / overload protection	
Voltage drop	[V]
Leakage current	[mA]
Current consumption	[mA]
Switching frequency	[Hz]

Real sensing range S_r	[mm]
Operating distance	[mm]
Switch-point drift	[% of S_r]
Hysteresis	[% of S_r]
Correction factors	

Output status indication	
Operating temperature	[°C]
Protection	
EMC	
Housing material	
Connection	
Wiring	

3-wire DC PNP normally open

10 ... 36 DC
150
—
—
•
•
< 2.5
—
< 15 (24V)
800

0.8 ± 10%
0 ... 0.65
-10 ... +10
1 ... 15
steel = 1; stainless steel approx. 0.7; Ms approx. 0.4; Al approx. 0.3; Cu approx. 0.2

LED red (4 x 90°)
-25 ... +80
IP 65
prEN 60947-5-2 annex X; EN 55011 class B
stainless steel (303S22); LCP
M8 connector

