



中国·人民电器集团
PEOPLE ELE. APPLIANCE GROUP CHINA


POWER RELAY

POWER RELAY



JZC-22F

Size(mm): 19.3×16.8×21
Terminal layout: 1Z, 1H
Contact capacity: 5A 7A 12A 15A
125VAC 287VDC
Contact resistance: $\leq 50m\Omega$
Insulation resistance: $\geq 100M\Omega$
Dielectric strength: BOC 500VAC
BCC 1500VAC

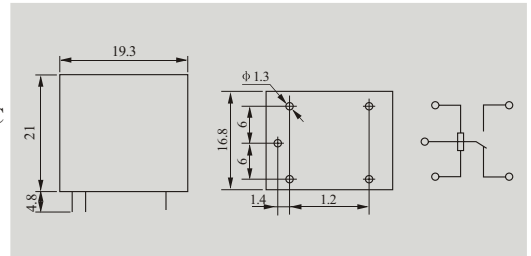


JZC-23F(4123)



JZC-23F(4123)

Size(mm): 20.8×16.1×16.8
Terminal layout: 1Z, 1H
Contact capacity: 10A 125VAC
Contact resistance: $\leq 50m\Omega$
Insulation resistance: $\geq 100M\Omega$
Dielectric strength: BOC 500VAC
BCC 1500VAC

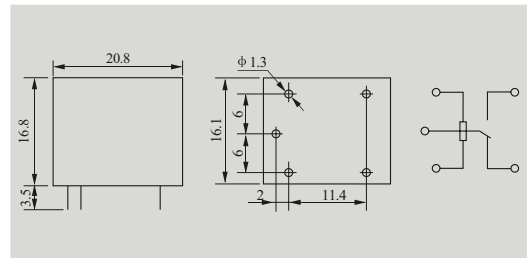


JQC-8F(T76)



JQC-8F(T76)

Size(mm): 22.5×16.8×11.1
Terminal layout: 1Z, 1H
Contact capacity: 20A 125VAC
10A 220VDC
Contact resistance: $\leq 50m\Omega$
Insulation resistance: $\geq 500M\Omega$
Dielectric strength: BOC 1000VAC
BCC 1500VAC

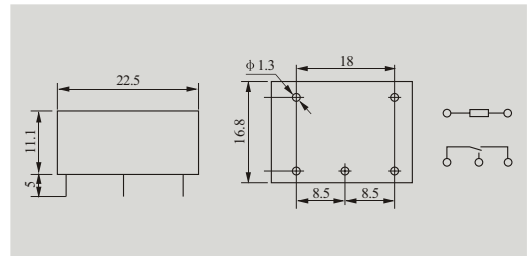


JQX-15F(T90)



JQX-15F(T90)

Size(mm): 32.5×27.5×20.5
Terminal layout: 1Z, 1H
Contact capacity: 30A 28VDC
30A 125VAC
20A 220VAC
Contact resistance: $\leq 50m\Omega$
Insulation resistance: $\geq 500M\Omega$
Dielectric strength: BOC 1000VAC
BCC 1500VAC

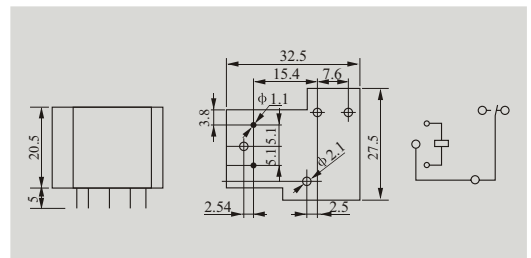

Model	Coil nominal voltage	Coil nominal power	Electrical life	Mechanical life	Operating temperature	Weight	Mounting methods
JZC-22F	DC 3 to 48V	DC $\leq 0.45W$	10 ⁵ OPS	10 ⁶ OPS	-25℃~40℃	$\leq 13g$	Printed-circuit board
JZC-23F(4123)	DC 3 to 48V	DC $\leq 0.36W$	10 ⁵ OPS	10 ⁶ OPS	-40℃~55℃	$\leq 10g$	Printed-circuit board
JQC-8F(T76)	DC 3 to 48V	DC $\leq 0.2W$	10 ⁵ OPS	10 ⁷ OPS	-40℃~45℃	$\leq 11g$	Printed-circuit board
JQX-15F(T90)	DC 3 to 110V	DC $\leq 0.93W$	10 ⁵ OPS	10 ⁷ OPS	-40℃~85℃	$\leq 24g$	Printed-circuit board