

JQX-115F (HF115F)

MINIATURE HIGH POWER RELAY



File No.:15008



File No.:E134517



File No.:116934



File No.:CQC02001001951



Features

- Low height: 15.7 mm
- 16A switching capability
- 5KV dielectric strength (between coil and contacts)
- Creepage distance: 10mm
- VDE0435/0631/0700, CT1250
- Sealed IP67 & flux proof types available
- Environmental friendly product available (RoHS compliant)
- Outline Dimensions: 29.0 x 12.7 x 15.7 mm

CONTACT DATA

Contact arrangement	1A, 1B, 1C	2A, 2B, 2C
Initial contact resistance Max.	50mΩ (at 1A 24VDC)	
Contact material	See ordering info.	
Contact rating (Res. load)	12A/16A 250VAC	8A 250VAC
Max. switching voltage	440VAC / 125VDC	
Max. switching current	12A / 16A	8A
Max. switching power	3000VA / 4000VA	2000VA
Mechanical life	1 x 10 ⁷ OPS	
Electrical life	1 x 10 ⁶ OPS	

CHARACTERISTICS

Initial insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	5000VAC 1min.
	Between open contacts	1000VAC 1min.
	Between contact sets	2500VAC 1min.
Surge voltage (between coil & contacts)	10KV (1.2X50μs)	
Operate time (at nomi. volt.)	Max. 15ms	
Release time (at nomi. volt.)	Max. 8ms	
Temperature rise (at nomi. volt.)	55°C	
Shock resistance	Functional	100 m/s ²
	Destructive	1000m/s ²
Vibration resistance	10 to150 Hz 10g/5g	
Humidity	35 to 85% RH	
Ambient temperature	-40°C to +85°C	
Termination	PCB	
Unit weight	13.5g	
Construction	Sealed IP67, Flux proof	

COIL

Coil power	400mW
------------	-------

COIL DATA

Nominal Voltage (VDC)	Pick-up Voltage (VDC)	Drop-out Voltage (VDC)	Max. Allowable Voltage (VDC) 20°C	Coil Resistance (Ω) 20°C
5	3.50	0.5	7.5	62 ± 10%
6	4.20	0.6	9.0	90 ± 10%
9	6.30	0.9	13.5	202 ± 10%
12	8.40	1.2	18	360 ± 10%
18	12.60	1.8	27	810 ± 10%
24	16.80	2.4	36	1440 ± 10%
48	33.60	4.8	72	5760 ± 15%
60	42.00	6.0	90	7500 ± 15%
110	77.00	11.0	165	25200 ± 15%

SAFETY APPROVAL RATINGS

FIMKO	8A 250VAC at 70 °C
	12A 250VAC at 70 °C
	16A 250VAC at 70 °C



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2006 Rev. 1.10

SAFETY APPROVAL RATINGS

VDE

Contact material	Specifications	Ratings	Ambient Temperature
AgCdO	JQX-115F....2(H;Z)(S)4(G)(F)	8A 250VAC	at 70°C
	JQX-115F....1H(S)(1;2)(G)(F)	12A 250VAC	at 70°C
		10A 250VAC	at 70°C
	JQX-115F....1Z(S)(1;2)(G)(F)	12A 250VAC	at 70°C
	JQX-115F....1H(S)3(G)(F)	16A 250VAC	at 70°C
		10A 250VAC	at 70°C
		9A 250VAC COSØ =0.4	at 70°C
	JQX-115F....1Z(S)3(G)(F)	16A 250VAC	at 70°C
	9A 250VAC COSØ =0.4	at 70°C	
AgNi	JQX-115F....2(H;Z)(S)4B(G)(F)	5A 400VAC	at 85°C
		8A 250VAC	at 85°C
	JQX-115F....1(H;Z)(S)3B(G)(F)	9A 250VAC COSØ =0.4	at 70°C
		16A 250VAC	at 85°C
	JQX-115F....1H(S)(1;2)B(G)(F)	12A 250VAC	at 85°C
		10A 250VAC	at 85°C
AgSnO ₂	JQX-115F....1(H;Z)(S)(1;2)A(G)(F)	12A 250VAC	at 85°C
	JQX-115F....1(H;Z)(S)3A(G)(F)	16A 250VAC	at 85°C
		9A 250VAC COSØ =0.4	at 70°C
	JQX-115F....2(H;Z)(S)4A(G)(F)	8A 250VAC	at 85°C

UL&CUR

Version 1 or 2 (AgCdO)	12A 277VAC
	1/2HP 250VAC
	1/3HP 125VAC
Version 1 or 2 (AgSnO ₂)	12A/ 277VAC
	B300
	R300
Version 1 or 2 (AgNi)	12A 277VAC
	16A 277 VAC
Version 3 (AgCdO)	9A 250VAC at 105°C
	1HP 250VAC
	1/2HP 125VAC
	TV-5 125VAC
Version 3 (AgSnO ₂)	16A 277 VAC
	B300
	R300
Version 3 (AgNi)	16A 277VAC
	10A 250VAC
Version 4 (AgCdO)	8A 277VAC
	1/2HP 250VAC
	1/4HP 125VAC
Version 4 (AgSnO ₂)	8A 277VAC
Version 4 (AgNi)	8A 277VAC

ORDERING INFORMATION


Type		JQX-115F / 012 1H S 1 A F XXX
Coil voltage	5, 6, 9, 12, 18, 24, 48, 60, 110VDC	
Contact arrangement	1H: 1 Form A 1D: 1 Form B 1Z: 1 Form C 2H: 2 Form A 2D: 2 Form B 2Z: 2 Form C	
Construction	S: Sealed IP67 Nil: Flux proof	
Version	1: 3.5mm 1 pole 12A 2: 5.0mm 1 pole 12A 3: 5.0mm 1 pole 16A 4: 5.0mm 2 pole 8A	
Contact material	A: AgSnO ₂ B: AgNi G: AgCdO+ Au plated BG: AgNi+ Au plated Nil: AgCdO	
Insulation standard	F: Class F Nil: Class B	
Customer special code (Only for special requirements)	e.g. 551 stands for RoHS compliant (Cadmium containing contacts) 555 stands for RoHS compliant (Cadmium-free contacts)	

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions

3.5mm Pinning (JQX-115F/□□□-□□-□-1-□□)



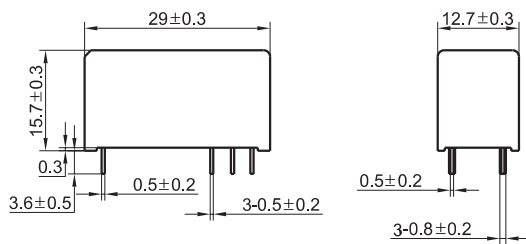


5mm Pinning (JQX-115F/□□□□-□□-□-2/3/4-□□)



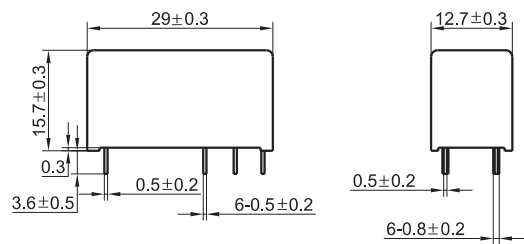


Wiring Diagram (Bottom view)




JQX-115F/ □□□□-□□-□-1/2-□□, 3.5/5mm Pinning, 1 Pole, 12A



JQX-115F/ □□□□-□□-□-3-□□, 5mm Pinning, 1 Pole, 16A







JQX-115F/ □□□□-□□-□-4-□□, 5mm Pinning, 2 Pole, 8A



OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

PCB Layout (T=2.52±0.02mm)




CHARACTERISTIC CURVES


MAXIMUM SWITCHING POWER

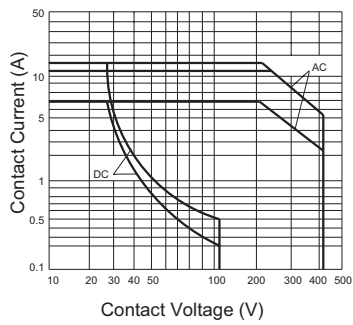

LIFE CURVE

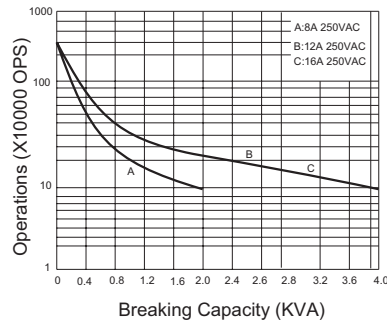

COIL OPERATING RANGE(DC)

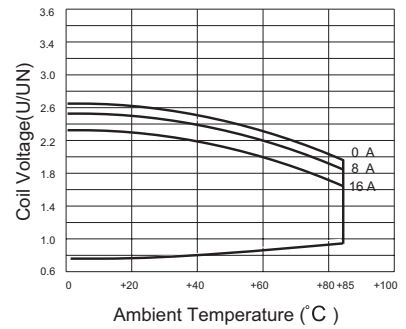

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.