



中国·人民电器集团  
PEOPLE ELE. APPLIANCE GROUP CHINA

POWER RELAY


POWER RELAY



JQX-16F(T91)

JQX-16F(T91)


Size(mm): 32.5×27.5×28  
Terminal layout: 1Z、1H、1D  
Contact capacity: 20A 30A 28VDC  
30A 20A 220VAC  
Contact resistance: ≤50mΩ  
Insulation resistance: ≥500MΩ  
Dielectric strength: BOC 1000VAC  
BCC 1500VAC

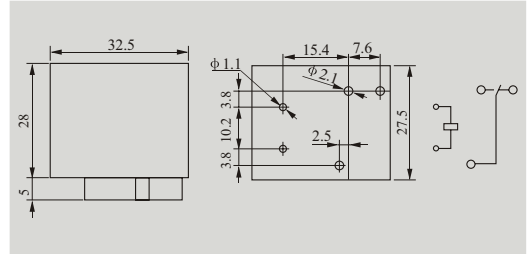

JQX-54FF

JQX-54FF


Size(mm): 47.7×30.8×19.6  
Terminal layout: 1Z、1H  
Contact capacity: 30A 28VDC  
30A 250VAC  
Contact resistance: ≤50mΩ  
Insulation resistance: ≥100MΩ  
Dielectric strength: BOC 1000VAC  
BCC 1500VAC

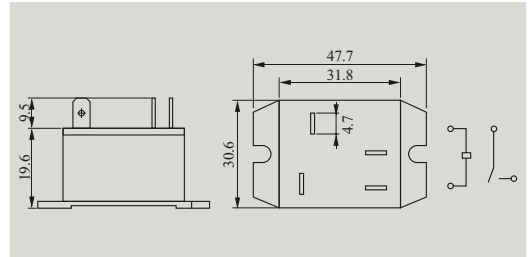

JQX-37F

JQX-37F


Size(mm): 50×32.5×34  
Terminal layout: 1H  
Contact capacity: 40A 240VAC  
80A 28VDC  
Contact resistance: ≤50mΩ  
Insulation resistance: ≥100MΩ  
Dielectric strength: BOC 1000VAC  
BCC 1500VAC

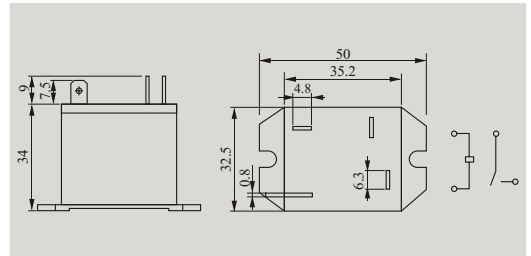

JQX-54FC

JQX-54FC

Size(mm): 30×18.5×29  
Terminal layout: 1Z、1H  
Contact capacity: 10A 125VAC  
Contact resistance: ≤50mΩ  
Insulation resistance: ≥100MΩ  
Dielectric strength: BOC 1000VAC  
BCC 1500VAC

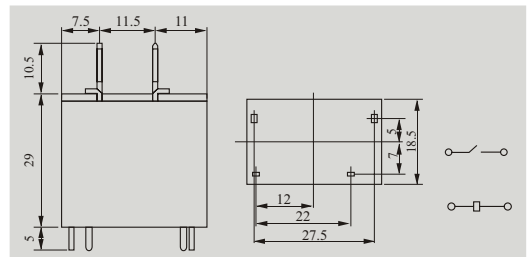

Model	Coil nominal voltage	Coil nominal power	Electrical life	Mechanical life	Operating temperature	Weight	Mounting methods
JQX-16F(T91)	DC 3to 110V	DC ≤0.93W	10 <sup>6</sup> OPS	10 <sup>6</sup> OPS	-40℃~85℃	≤31g	Printed-circuit board
JQX-54FF	DC 6to 48V	DC ≤0.9W	10 <sup>6</sup> OPS	10 <sup>6</sup> OPS	-40℃~55℃	≤37g	Outlet
JQX-37F	DC 6to 48V	DC ≤1.2W	10 <sup>6</sup> OPS	10 <sup>6</sup> OPS	-40℃~55℃	≤50g	Outlet
JQX-54FC	DC 6to 48V	DC ≤0.9W	10 <sup>6</sup> OPS	10 <sup>6</sup> OPS	-40℃~50℃	≤27g	Printed-circuit board