



JQX-60F

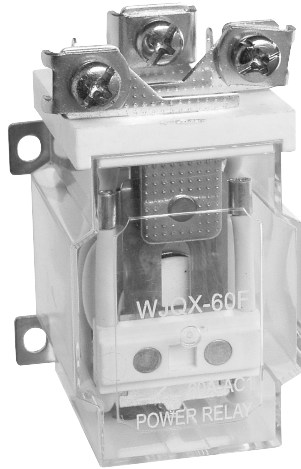

1 Product Types and Meanings

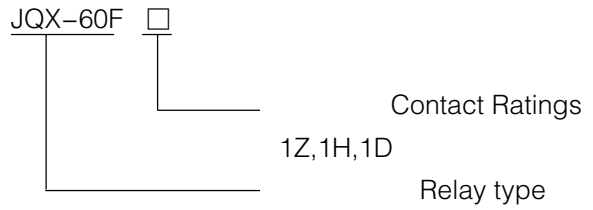

2 Specification

Type	JQX-60F	
Bick-up voltage	≤ 80%us,80% of rated voltage	
Drop-out voltage	AC	≥ 30%us,30% of rated voltage
	DC	10%us,10% of rated voltage
Max supply voltage	110%us,110% of rated voltage	
Operating time	25ms	
Release time	25ms	
Coil voltage	AC	6~220V
	DC	5~60V
Nominal coil power	DC2.0W/AC2.5VA	
Rated insulation voltage	250V	
Contaet resistance	≤ 50mΩ	
Contaet resistance	1000MΩ	
Insulation strength	2500VAC/1min	
Operation cyele	30cpm	
Vibration	10~50Hz,双振幅 1.5mm Dual Amplitude 1.5mm	
Shock	10G	
Mechanical life	1 × 10 ⁷	
Electrical life	1 × 10 ⁵	
()Contact capacity	60A/250VAC	
Net weight	≤ 240g	
Ambient temperature	-10℃ ~ +55℃	
Humidity	35%~85%RH	
Atmospheric	86~106KPa	