



Add:NO. 87 YingBin West R.D.,Huangtu Town,
 JiangYin,JiangSu Province,China,214445
 Tel:+86-510-86651059
 Fax:+86-510-86651040
 WebSite:www.jingmichina.com
 E-mail:jingmico@sina.com

IT'S OUR PLEASURE

TO COPPERATE WITH YOU

JRM series thermal protector

Structure characters

JRM series thermal protectors are sensitive to temperature changing and safe. The high quality bimetal is sensitive element in product. They are enclosed by metal case and will reset themselves


Applications

JRM series thermal protectors are not only widely used for production in DC electrical tools, miner's lamp, PC, interphone and rechargeable battery in vidicon, but also can be used for temperature control in medical tools, house-holding machine and some low-voltage electric machine.

Parameters


Action temp. $-20^{\circ}\text{C}\sim 200^{\circ}\text{C}$ tolerance: $\pm 5^{\circ}\text{C}$
 Reset temp : a rang of 2°C below action temperature
 Used condition : $-20^{\circ}\text{C}\sim 200^{\circ}\text{C}$
 Rated voltage: DC24V,AC120V
 Rated current: 2A,3A,5A

Marks:

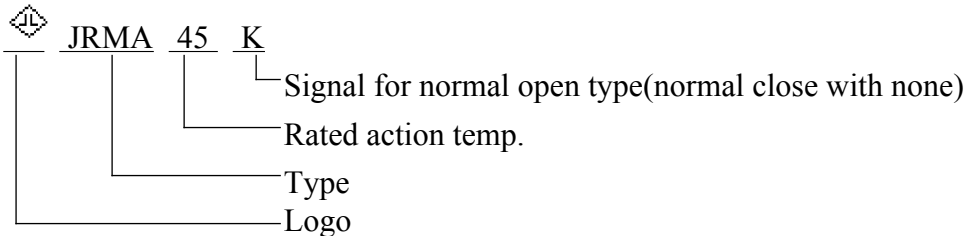

Figure

| Code of figure (mm) Type | A | B | L1 | L2 |
|-----------------------------|---------------|---------------|--------------|-------------------------------------|
| JRMA | 5.3 ± 0.2 | 4 ± 0.2 | 15.8 ± 1 | According to customers' requirement |
| JRMB | 5.7 ± 0.2 | 4.0 ± 0.2 | 18 ± 1 | According to customers' requirement |
| JRMC | 5.3 ± 0.2 | 2.4 ± 0.2 | 15.8 ± 1 | According to customers' requirement |

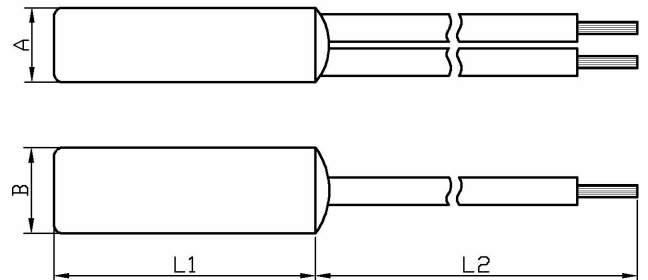

Certification

UL:E189924
 TUV:50103015
 complying with RoHS