

1900MHz 3dB Hybrid

► Applications



- PHS Communication systems

► Features

- Low Insertion Loss, High Power Handling, Better Phase Balance
- Temperature Stabilized Holds Specifications At Thermal Extremes
- Custom Designs Available

► Technical Specifications

P/N	JXMBDQ-T-1880-1920
Frequency Range	1880-1920MHz
Insertion Loss	≤0.2dB
Coupling	3±0.3dB
Phase Balance	5°
VSWR	≤1.2:1
Isolation	≥25dB
Impedance	50Ω
Port Connector	N-Female
Power Handling	100W
Operating Temperature	-30°C ~ +70°C

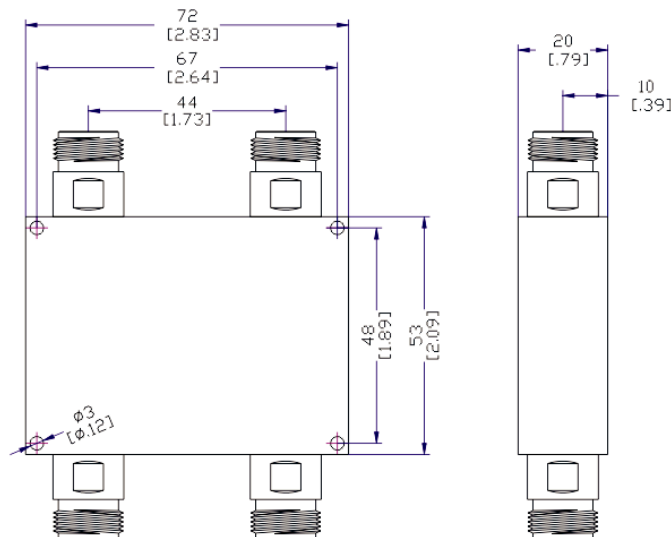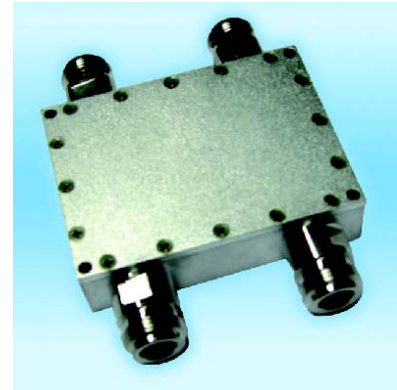

www.DataSheet4U.com