


2SK318

SILICON N-CHANNEL MOS FET

HF/VHF POWER AMPLIFIER


■ FEATURES

- High Breakdown Voltage.
- You Can Decrease Handling Current.
- Gate is Protected by Zenner Diodes.
- No Secondary-Breakdown.
- Wide Area of Safe Operation.
- Infinite VSWR.
- No Thermal Runaway.
- Simple Bias Circuitry.



1. Source
2. Source
3. Source
4. Source
5. Drain
6. Gate

(Dimensions in mm)

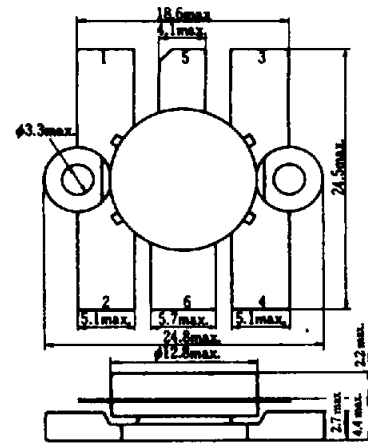


(RFPAK-A)

■ ABSOLUTE MAXIMUM RATINGS ($T_c=25^\circ\text{C}$)

Item	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	180	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current	I_D	4	A
Channel Dissipation	P_{ch}^*	70	W
Channel Temperature	T_{ch}	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-55 \sim +150$	$^\circ\text{C}$

*Value at $T_c=25^\circ\text{C}$

POWER VS. TEMPERATURE DERATING

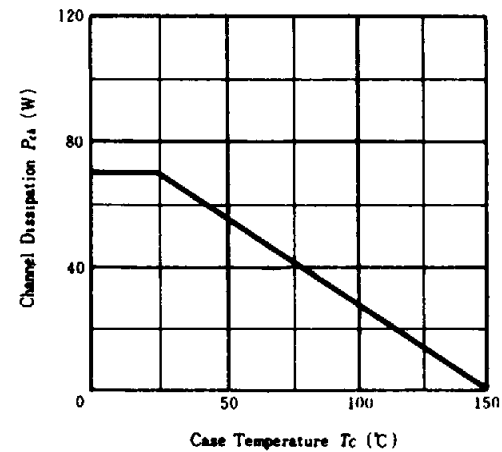

■ ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$)

Item	Symbol	Test Condition	min.	typ.	max.	Unit
Power Output	P_O	$V_{DD}=80\text{V}, I_{DQ}=0.1\text{A}$	60	90	—	W
Drain Efficiency	η	$P_{in}=4\text{W}, f=100\text{MHz}$	—	80	—	%
Drain-Source Breakdown Voltage	$V_{(BR)DS}$	$I_D=10\text{mA}, V_{GS}=0$	180	—	—	V
Gate-Source Breakdown Voltage	$V_{(BR)GS}$	$I_G=\pm 100\mu\text{A}, V_{DS}=0$	± 20	—	—	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=140\text{V}, V_{GS}=0$	—	—	1.0	mA
Gate-Source Cutoff Voltage	$V_{GS(off)}$	$I_D=1\text{mA}, V_{DS}=10\text{V}$	0.5	—	3.0	V
Static Drain-Source On State Resistance	$R_{DS(on)}$	$I_D=2\text{A}, V_{GS}=10\text{V}^*$	—	1.9	3.0	Ω
Drain-Source Saturation Voltage	$V_{DS(on)}$	$I_D=2\text{A}, V_{GS}=10\text{V}^*$	—	3.8	6.0	V
Forward Transfer Admittance	$ y_{fd} $	$I_D=1.5\text{A}, V_{DS}=20\text{V}^*$	0.4	0.6	—	S
Input Capacitance	C_{iss}	$V_{GS}=5\text{V}, V_{DS}=0, f=1\text{MHz}$	—	300	—	pF
Output Capacitance	C_{oss}	$V_{GS}=-5\text{V}, V_{DS}=50\text{V}, f=1\text{MHz}$	—	45	—	pF
Reverse Transfer Capacitance	C_{rss}	$V_{GD}=-50\text{V}, f=1\text{MHz}$	—	0.3	—	pF


*Pulse Test

CAUTION: OPERATING HAZARDS


Beryllium Oxide Ceramics have been employed in these products.

Since dust or fume of the material is highly poison to the human body, please do not treat them mechanically or chemically in the manner which might expose them to the air. And it should never be thrown out with general industrial or domestic waste.


MAXIMUM SAFE OPERATION AREA

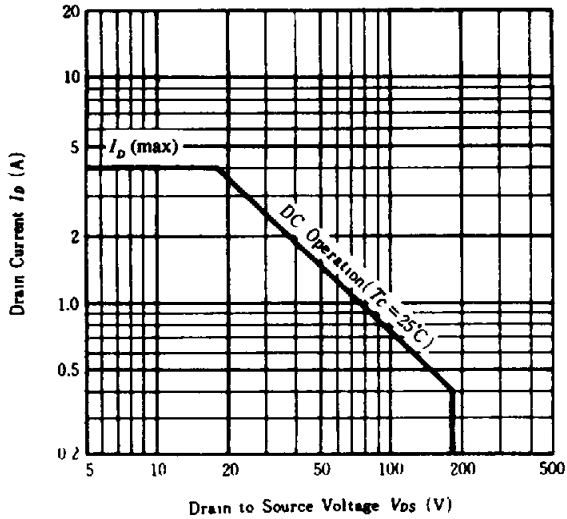


TYPICAL OUTPUT CHARACTERISTICS

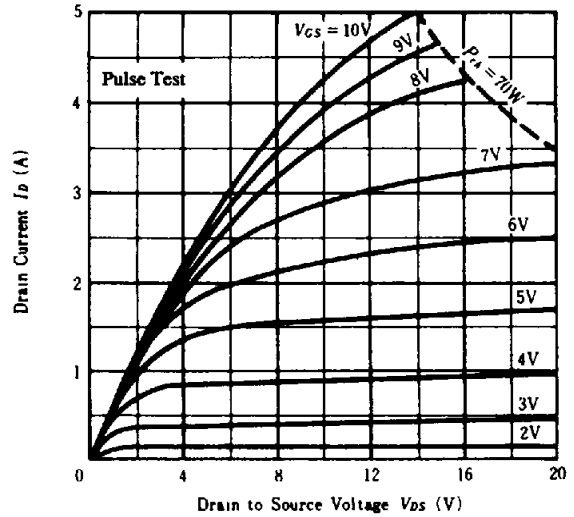


TYPICAL TRANSFER CHARACTERISTICS

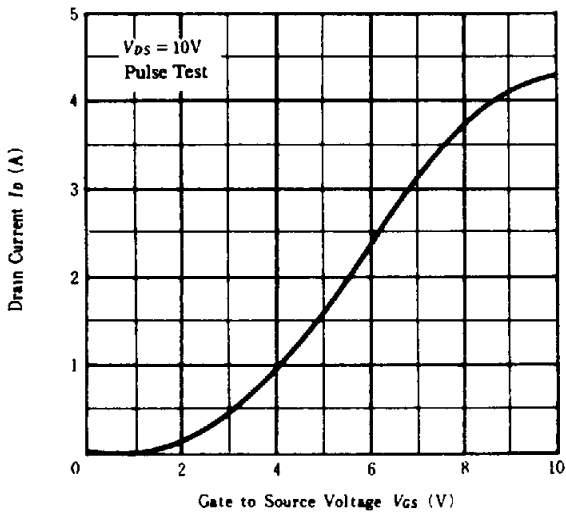

INPUT POWER VS. OUTPUT POWER (1)

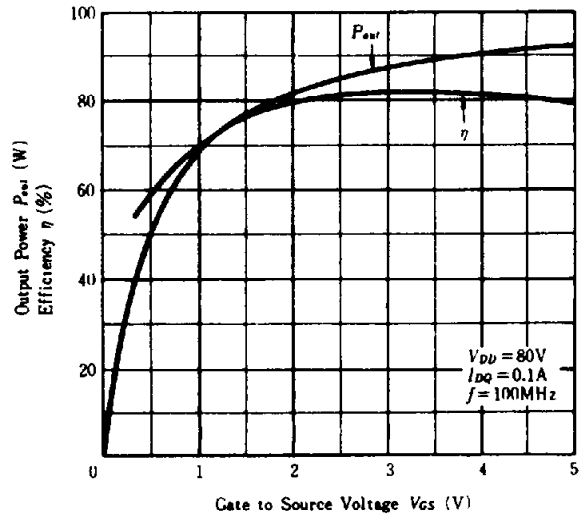

INPUT POWER VS. OUTPUT POWER (2)

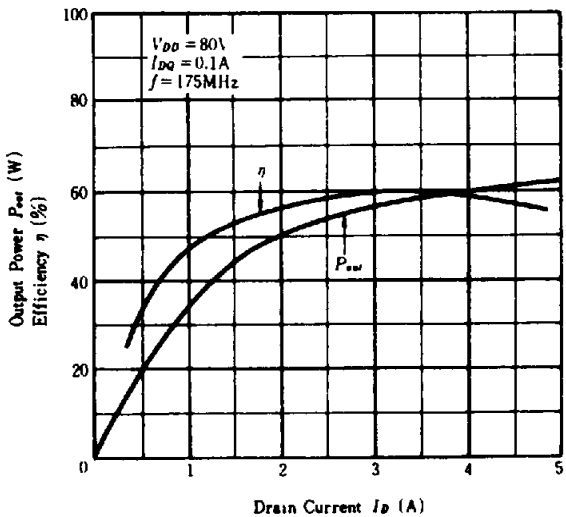

OUTPUT POWER TEST CIRCUIT

