






MAXIMUM SAFE OPERATION AREA

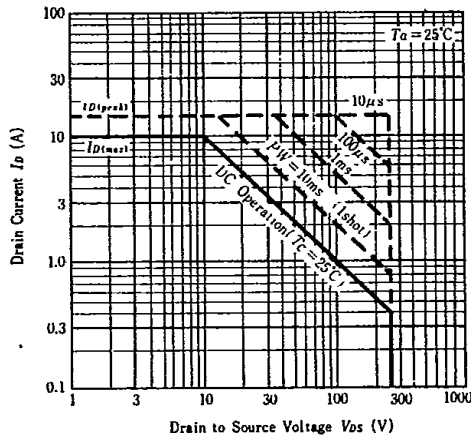


TYPICAL OUTPUT CHARACTERISTICS

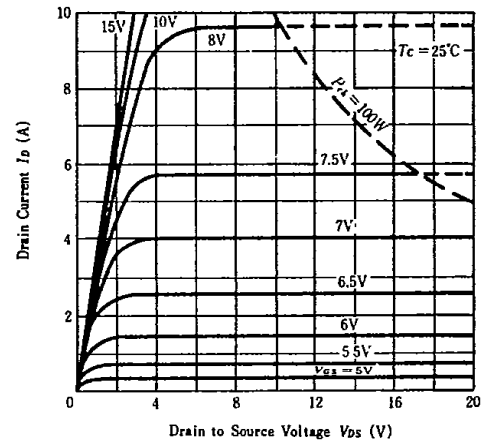


TYPICAL TRANSFER CHARACTERISTICS

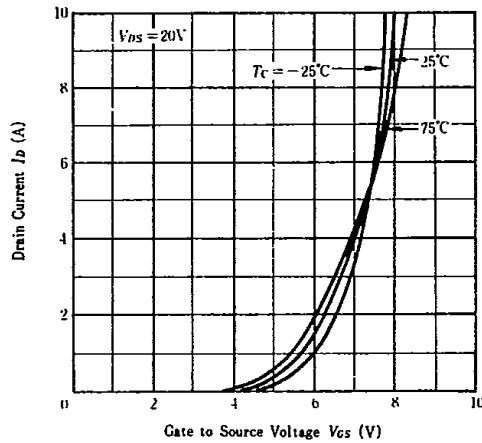


DRAIN-SOURCE SATURATION VOLTAGE VS. GATE-SOURCE VOLTAGE

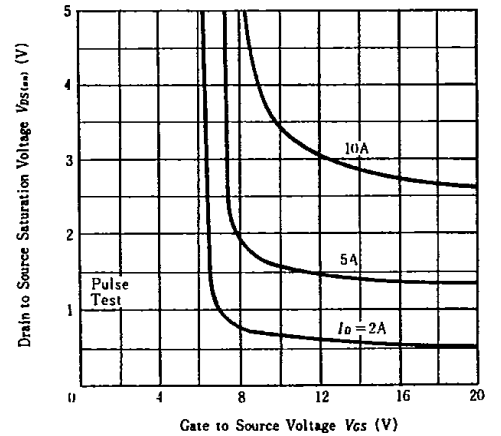

FORWARD TRANSFER ADMITTANCE VS. DRAIN CURRENT

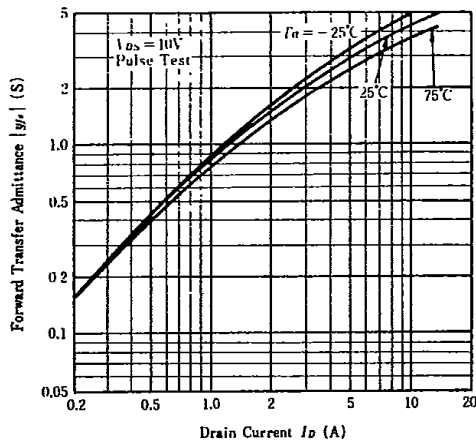


STATIC DRAIN-SOURCE ON STATE RESISTANCE VS. TEMPERATURE

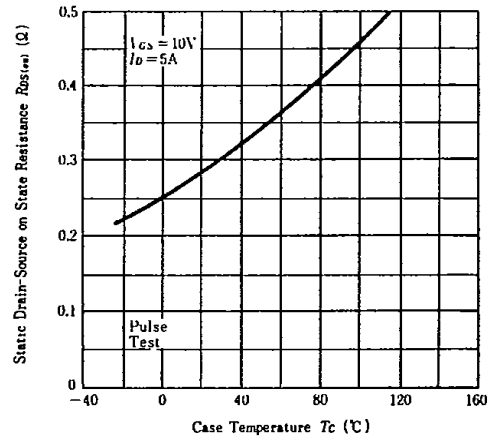


查询“2SK 412”供应商


TYPICAL CAPACITANCE VS. DRAIN-SOURCE VOLTAGE

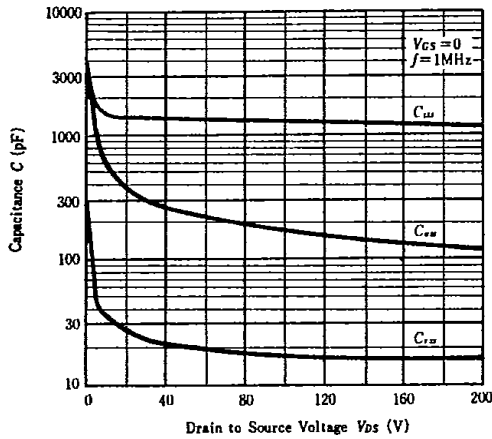


FORWARD TRANSFER ADMITTANCE VS. FREQUENCY

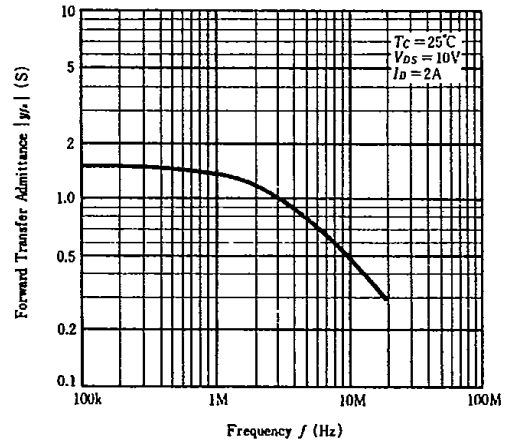


SWITCHING CHARACTERISTICS

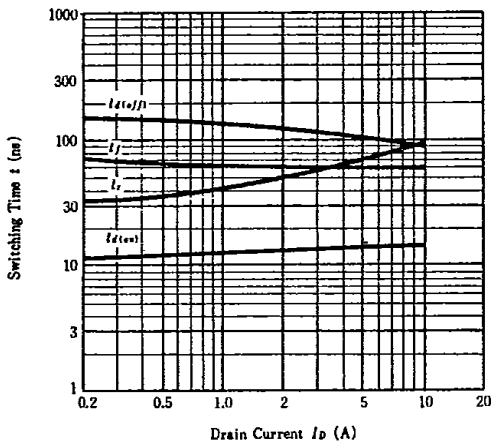


MAXIMUM BODY-DRAIN DIODE FORWARD VOLTAGE

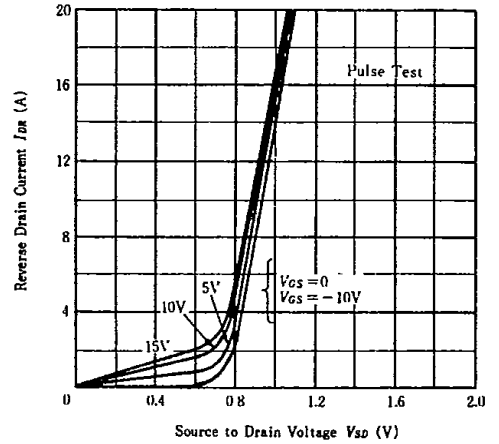

DYNAMIC INPUT CHARACTERISTICS

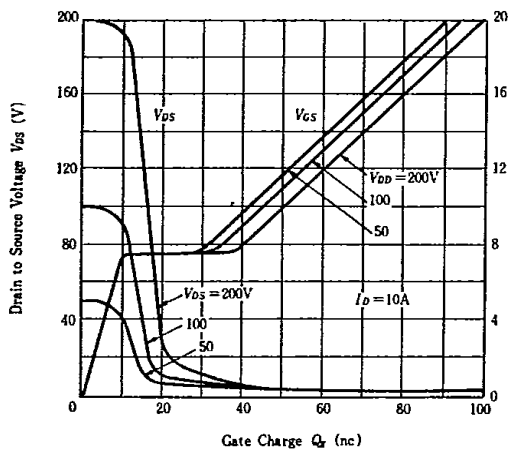

SWITCHING TIME TEST CIRCUIT

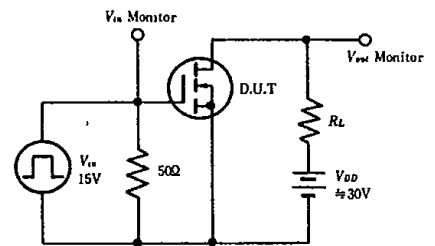

WAVEFORMS

