


Three Terminal Positive Voltage Regulator

KA280M05

■ Features

- Maximum Output Current:
 $I_{OM} = 500\text{mA}$
- Output Voltage:
 $V_O = 5\text{V}$
- Continuous Total Dissipation:
 $PD: 1.25\text{W}$ ($T_a = 25^\circ\text{C}$)

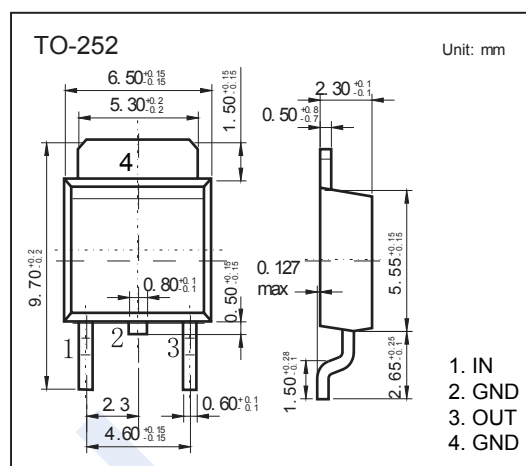

■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise noted)

Parameter	Symbol	Rating	Unit
Input Voltage	V_i	35	V
Maximum Output Current	I_o	0.5	A
Thermal Resistance, Junction-to-Ambient	R_{thJA}	80	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_{OPR}	-25 to 125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to 150	

■ Electrical Characteristics at Specified Virtual Jinction Temperature

($V_i = 10\text{V}$, $I_o = 350\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_o	25°C	4.8	5	5.2	V
		$7\text{V} \leq V_i \leq 20\text{V}$, $5\text{mA} \leq I_o \leq 350\text{mA}$, $-25 \sim 125^\circ\text{C}$	4.75	5	5.25	
Load Regulation	ΔV_o	$5\text{mA} \leq I_o \leq 500\text{mA}$, 25°C			100	mV
		$5\text{mA} \leq I_o \leq 200\text{mA}$, 25°C			50	
Line Regulation	ΔV_o	$7\text{V} \leq V_i \leq 25\text{V}$, $I_o = 200\text{mA}$, 25°C			100	
		$8\text{V} \leq V_i \leq 25\text{V}$, $I_o = 200\text{mA}$, 25°C			50	
Quiescent Current	I_q	25°C			6	mA
Quiescent Current Change	ΔI_q	$8\text{V} \leq V_i \leq 25\text{V}$, $I_o = 200\text{mA}$, $-25 \sim 125^\circ\text{C}$			0.8	
		$5\text{mA} \leq I_o \leq 350\text{mA}$, $-25 \sim 125^\circ\text{C}$			0.5	
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{kHz}$, 25°C		40	200	$\mu\text{V}/V_o$
Ripple Rejection	RR	$8\text{V} \leq V_i \leq 18\text{V}$, $f = 120\text{Hz}$, $I_o = 300\text{mA}$, $-25 \sim 125^\circ\text{C}$	62			dB
Dropout Voltage	V_d	$I_o = 350\text{mA}$, 25°C			2.5	V
Short Circuit Current Limit	I_{sc}	$V_i = 10\text{V}$, 25°C		300		mA
Peak Current	I_{pk}	25°C		0.5		A

* Pulse test.

■ Marking

Marking	KM05
---------	------

Three Terminal Positive Voltage Regulator

KA280M05

■ Typical Characteristics

