


# KAS9WA

Solenoid Valve

## Applications

Massager, Medical Equipment, etc

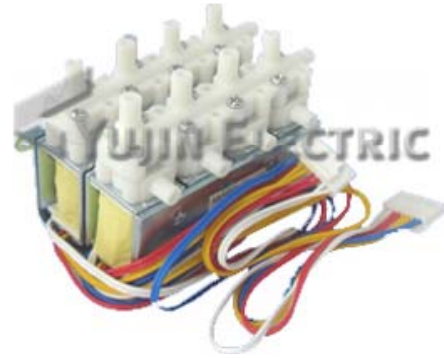

## Specifications

1. Rated Voltage	DC12.0V
2. Rated Current	185x8=1480mA
3. Exhaust Time	Max. 4.0 seconds from 450 mmHg reduce to 20 mmHg at 1500CC tank.
4. Resistance	65Ω±10%
5. Leakage	Max. 15 mmHg/min from 450mmHg at 1500CC tank.
6. Insulation Level	E
7. Apply For	Air

## Drawing

