

KBJ1001 THRU KBJ1007



SINGLE PHASE 10.0 AMP BRIDGE RECTIFIERS



FEATURES

- * Ideal for printed circuit board
- * Low forward voltage
- * Low leakage current
- * Mounting position: Any


VOLTAGE RANGE

50 to 1000 Volts

CURRENT

10.0 Amperes

KBJ

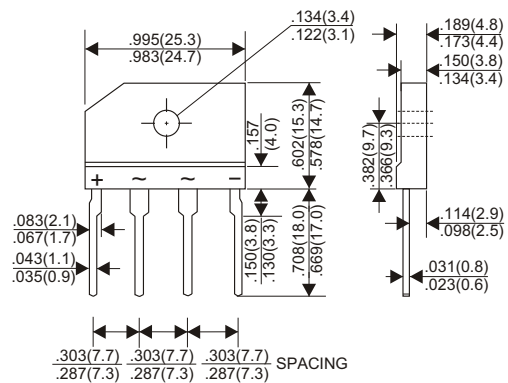

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	KBJ1001	KBJ1002	KBJ1003	KBJ1004	KBJ1005	KBJ1006	KBJ1007	UNITS	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
Maximum Average Forward (with heatsink Note 1)								10.0	A
Rectified Current at Tc=110°C (Without heatsink)								3.0	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)								170	A
Maximum Forward Voltage Drop per Bridge Element at 5.0A D.C.								1.1	V
Maximum DC Reverse Current Ta=25°C								5.0	μA
at Rated DC Blocking Voltage Ta=100°C								500	μA
Typical Thermal Resistance Rθjc (Note 2)								1.9	°C/W
Typical Junction Capacitance (Note 3)								55	PF
Operating Temperature Range, Tj								-55 — +150	°C
Storage Temperature Range, Tstg								-55 — +150	°C

NOTES

1. Device mounted on 150mm x 150mm x 1.6mm Cu Plate Heatsink.
2. Thermal Resistance from Junction to Case with device mounted on 150mm x 150mm x 1.6mm Cu Plate Heatsink.
3. Measured at 1MHz and applied Reverse Voltage of 4.0V D.C.

RATING AND CHARACTERISTIC CURVES (KBJ1001 THRU KBJ1007)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

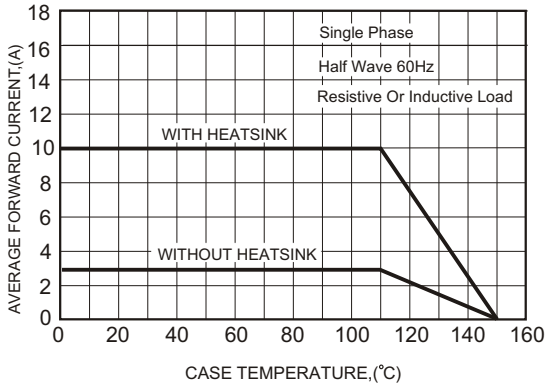


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

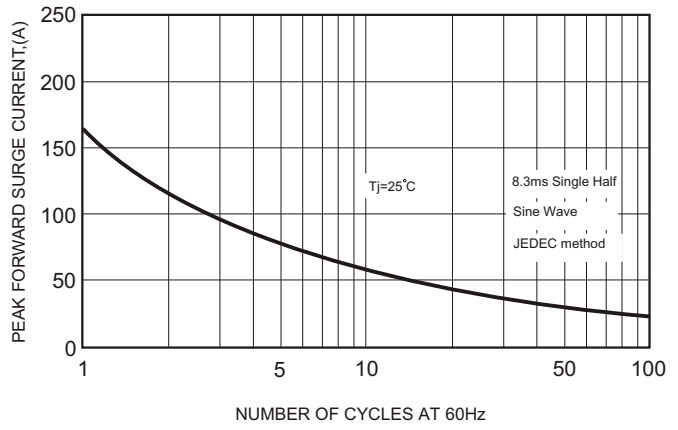


FIG.3-TYPICAL FORWARD CHARACTERISTICS

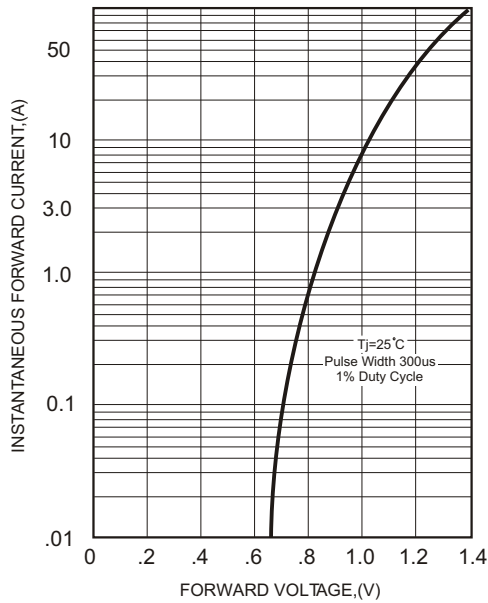


FIG.4-TYPICAL REVERSE CHARACTERISTICS

